
TOSHIBA CMOS Digital Integrated Circuit Silicon Monolithic

TC7MH367FK,TC7MH368FK

HEX Bus Buffer

TC7MH367FK Non-Inverted, 3-State Outputs

TC7MH368FK Inverted, 3-State Outputs



VSSOP16-P-0030-0.50

Weight: 0.02 g (typ.)

The TC7MH367FK and TC7MH368FK are advanced high speed CMOS HEX bus buffers fabricated with silicon gate C^2MOS technology.

They achieve the high speed operation similar to equivalent bipolar schottky TTL while maintaining the CMOS low power dissipation.

They contain six buffers; four buffers are controlled by an enable input ($\overline{G}1$), and the other two buffers are controlled by another enable input ($\overline{G}2$). The outputs of each buffer group are enabled when $\overline{G}1$ and/or $\overline{G}2$ inputs are held low; if held high, these outputs are in a high impedance state.


The TC7MH367FK is a non-inverting output type, while the TC7MH368FK is an inverting output type.

An input protection circuit ensures that 0 to 5.5 V can be applied to the input pins without regard to the supply voltage. This device can be used to interface 5 V to 3 V systems and two supply systems such as battery back up. This circuit prevents device destruction due to mismatched supply and input voltages.


Features

- High speed: t_{pd} = 3.8 ns (typ.) (V_{CC} = 5 V)
- Low power dissipation: I_{CC} = 4 μA (max) (Ta = 25°C)
- High noise immunity: $V_{NIH} = V_{NIL}$ = 28% V_{CC} (min)
- Power down protection is provided on all inputs.
- Balanced propagation delays: $t_{pLH} \approx t_{pHL}$
- Wide operating voltage range: $V_{CC\ (opr)}$ = 2~5.5 V
- Low noise: V_{OLP} = 0.8 V (max)
- Pin and function compatible with 74ALS367/368

Pin Assignment (top view)

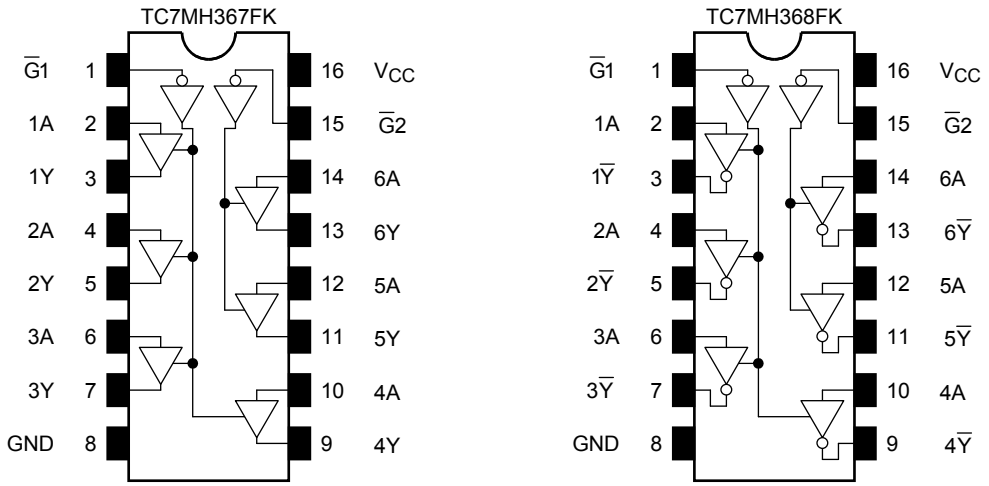

IEC Logic Symbol

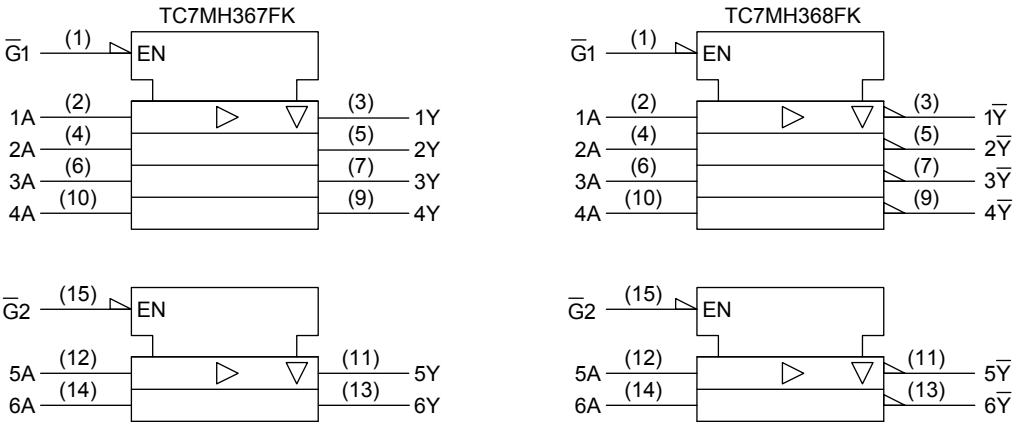

Truth Table

Inputs		Outputs	
$\overline{G}$	A	Y (367)	$\overline{Y}$ (368)
L	L	L	H
L	H	H	L
H	X	Z	Z

X: Don't care

Z: High impedance

Absolute Maximum Ratings (Note)

Characteristics	Symbol	Rating	Unit
Supply voltage range	V_{CC}	−0.5~7.0	V
DC input voltage	V_{IN}	−0.5~7.0	V
DC output voltage	V_{OUT}	−0.5~V_{CC} + 0.5	V
Input diode current	I_{IK}	−20	mA
Output diode current	I_{OK}	±20	mA
DC output current	I_{OUT}	±25	mA
DC V_{CC}/ground current	I_{CC}	±50	mA
Power dissipation	P_D	180	mW
Storage temperature	T_{stg}	−65~150	°C

Note: Exceeding any of the absolute maximum ratings, even briefly, lead to deterioration in IC performance or even destruction.
Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.
Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook (“Handling Precautions”/“Derating Concept and Methods”) and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Operating Ranges (Note)

Characteristics	Symbol	Rating	Unit
Supply voltage	V_{CC}	2.0~5.5	V
Input voltage	V_{IN}	0~5.5	V
Output voltage	V_{OUT}	0~V_{CC}	V
Operating temperature	T_{opr}	−40~85	°C
Input rise and fall time	dt/dv	0~100 (V_{CC} = 3.3 ± 0.3 V)	ns/V
		0~20 (V_{CC} = 5 ± 0.5 V)	

Note: The operating ranges must be maintained to ensure the normal operation of the device.
Unused inputs must be tied to either VCC or GND.

Electrical Characteristics

DC Characteristics

Characteristics		Symbol	Test Condition			Ta = 25°C			Ta = −40~85°C		Unit
					V_{CC} (V)	Min	Typ.	Max	Min	Max	
Input voltage	High level	V_{IH}	—		2.0	1.50	—	—	1.50	—	V
					3.0~5.5	V_{CC} × 0.7	—	—	V_{CC} × 0.7	—	
	Low level	V_{IL}	—		2.0	—	—	0.50	—	0.50	
					3.0~5.5	—	—	V_{CC} × 0.3	—	V_{CC} × 0.3	
Output voltage	High level	V_{OH}	V_{IN} = V_{IH} or V_{IL}	I_{OH} = −50 μA	2.0	1.9	2.0	—	1.9	—	V
					3.0	2.9	3.0	—	2.9	—	
					4.5	4.4	4.5	—	4.4	—	
				I_{OH} = −4 mA	3.0	2.58	—	—	2.48	—	
				I_{OH} = −8 mA	4.5	3.94	—	—	3.80	—	
	Low level	V_{OL}	V_{IN} = V_{IH} or V_{IL}	I_{OL} = 50 μA	2.0	—	0	0.1	—	0.1	
					3.0	—	0	0.1	—	0.1	
					4.5	—	0	0.1	—	0.1	
				I_{OL} = 4 mA	3.0	—	—	0.36	—	0.44	
				I_{OL} = 8 mA	4.5	—	—	0.36	—	0.44	
3-state output off-state current		I_{OZ}	V_{IN} = V_{IH} or V_{IL} V_{OUT} = V_{CC} or GND		5.5	—	—	±0.25	—	±2.50	μA
Input leakage current		I_{IN}	V_{IN} = 5.5 V or GND		0~5.5	—	—	±0.1	—	±1.0	μA
Quiescent supply current		I_{CC}	V_{IN} = V_{CC} or GND		5.5	—	—	4.0	—	40.0	μA

AC Characteristics (Input: $t_r = t_f = 3$ ns)

Characteristics	Symbol	Test Condition			Ta = 25°C			Ta = −40~85°C		Unit
			V_{CC} (V)	C_L (pF)	Min	Typ.	Max	Min	Max	
Propagation delay time (TC7MH367)	t_{pLH} t_{pHL}	—	3.3 ± 0.3	15	—	5.9	8.3	1.0	10.0	ns
				50	—	8.4	11.8	1.0	13.5	
			5.0 ± 0.5	15	—	4.1	5.9	1.0	7.0	
				50	—	5.6	7.9	1.0	9.0	
Propagation delay time (TC7MH368)	t_{pLH} t_{pHL}	—	3.3 ± 0.3	15	—	5.3	7.5	1.0	9.0	ns
				50	—	7.8	11.0	1.0	12.5	
			5.0 ± 0.5	15	—	3.8	5.5	1.0	6.5	
				50	—	5.3	7.5	1.0	8.5	
3-state output enable time	t_{pZL} t_{pZH}	R_L = 1 kΩ	3.3 ± 0.3	15	—	6.8	10.5	1.0	12.5	ns
				50	—	9.3	14.0	1.0	16.0	
			5.0 ± 0.5	15	—	4.8	7.2	1.0	8.5	
				50	—	6.3	9.2	1.0	10.5	
3-state output disable time	t_{pLZ} t_{pHZ}	R_L = 1 kΩ	3.3 ± 0.3	50	—	9.9	13.6	1.0	15.5	ns
			5.0 ± 0.5	50	—	6.3	9.2	1.0	10.5	
Output to output skew	t_{osLH} t_{osHL}	(Note 1)	3.3 ± 0.3	50	—	—	1.5	—	1.5	ns
			5.0 ± 0.5	50	—	—	1.0	—	1.0	
Input capacitance	C_{IN}	—			—	4	10	—	10	pF
Output capacitance	C_{OUT}	—			—	6	—	—	—	pF
Power dissipation capacitance	C_{PD}	(Note 2)			—	19	—	—	—	pF

Note 1: Parameter guaranteed by design.

$t_{osLH} = |t_{pLHm} - t_{pLHn}|$, $t_{osHL} = |t_{pHLm} - t_{pHLn}|$

Note 2: C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.


Average operating current can be obtained by the equation:

$I_{CC\ (opr)} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}/6$ (per bit)

Noise Characteristics (Input: $t_r = t_f = 3$ ns)


Characteristics	Symbol	Test Condition	Ta = 25°C			Unit
			V_{CC} (V)	Typ.	Limit	
Quiet output maximum dynamic V_{OL}	V_{OLP}	C_L = 50 pF	5.0	0.4	0.8	V
Quiet output minimum dynamic V_{OL}	V_{OLV}	C_L = 50 pF	5.0	−0.4	−0.8	V
Minimum high level dynamic input voltage V_{IH}	V_{IHD}	C_L = 50 pF	5.0	—	3.5	V
Maximum low level dynamic input voltage V_{IL}	V_{ILD}	C_L = 50 pF	5.0	—	1.5	V

Input Equivalent Circuit

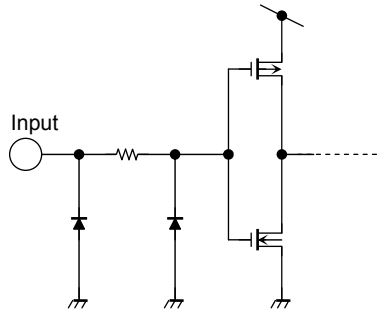

Package Dimensions

VSSOP16-P-0030-0.50 Unit : mm

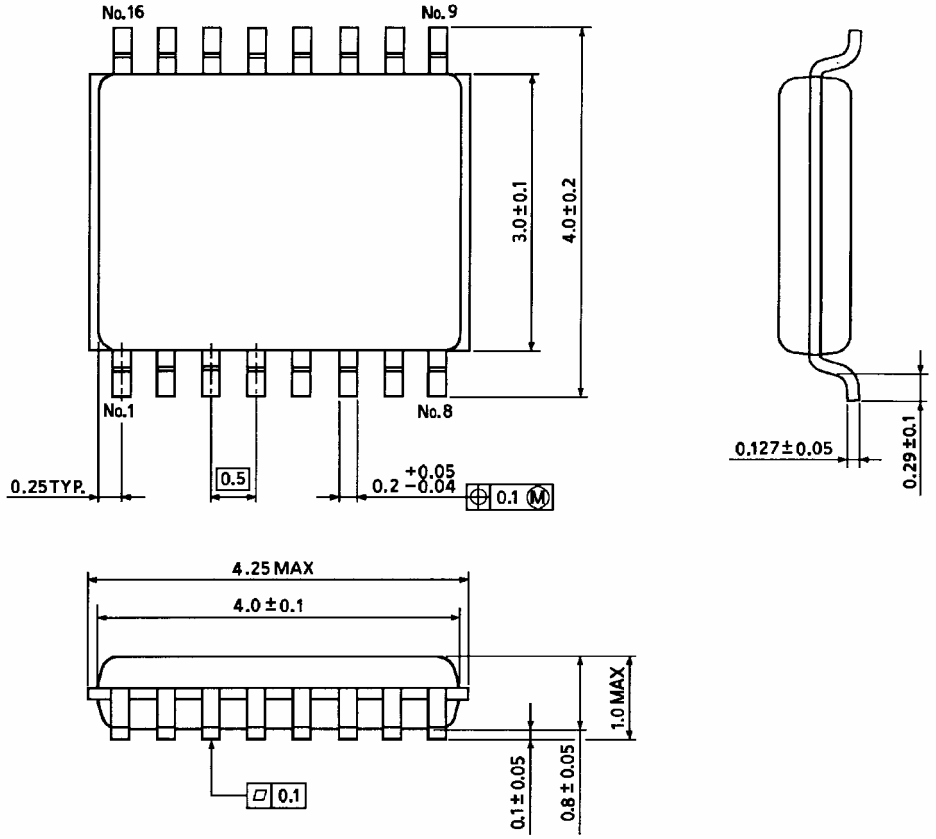

Weight: 0.02 g (typ.)

RESTRICTIONS ON PRODUCT USE

20070701-EN GENERAL

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
  In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the “Handling Guide for Semiconductor Devices,” or “TOSHIBA Semiconductor Reliability Handbook” etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.).These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury (“Unintended Usage”). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in his document shall be made at the customer’s own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.