

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0015913740](#)
Status: **Active**
Description: 2.54mm (.100") Pitch C-Grid® Header, Surface Mount, Dual Row, Vertical, 74 Circuits, 0.76µm (30µ") Gold (Au) Selective Plating, without PCB Locator Pegs

Documents:

3D Model	Product Specification PS-71308 (PDF)
Packaging Specification (PDF)	RoHS Certificate of Compliance (PDF)
Drawing (PDF)	

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	71308
Application	Board-to-Board, Wire-to-Board
Product Name	C-Grid®

Physical


Breakaway	Yes
Circuits (Loaded)	74
Circuits (maximum)	74
Color - Resin	Black
Durability (mating cycles max)	50
Flammability	94V-0
Glow-Wire Compliant	No
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Vertical
PCB Locator	No
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.75
Plating min: Termination (µin)	75
Plating min: Termination (µm)	1.875
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	Yes
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	3A
Voltage - Maximum	250V

Solder Process Data

Duration at Max. Process Temperature (seconds)	30
--	----



*Series
image - Reference only*

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Not Reviewed
**Halogen-Free
Status**

Not Reviewed

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

China RoHS



Search Parts in this Series
[71308Series](#)

Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	260

Material Info


Reference - Drawing Numbers

Product Specification	PS-71308, RPS-71308-001
Sales Drawing	SD-71308-001


This document was generated on 03/30/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

OPTIONAL PICK AND PLACE CAP SEE NOTES 4 & 9.

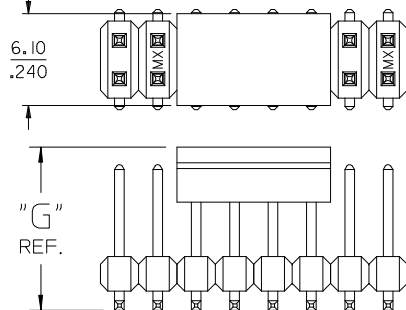


PEG OPTIONS

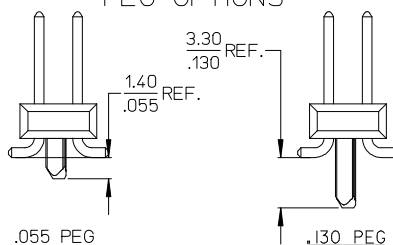

NOTES:

- MATERIALS: INSULATOR: GLASS FILLED LIQUID CRYSTAL POLYMER (LCP), UL94 V-0, COLOR: BLACK
TERMINAL: COPPER ALLOY
- FINISH:
59 TIN - 0.00150/.000059 MINIMUM BRIGHT TIN OVER NICKEL OVERALL.
150 TIN - 0.00381/.000150 MINIMUM BRIGHT TIN OVER NICKEL OVERALL.
15 GOLD - 0.00038/.000015 MINIMUM GOLD IN SELECT AREA OVER 0.00191/.000075 MINIMUM TIN IN SELECT AREA OVER NICKEL OVERALL.
30 GOLD - 0.00076/.000030 MINIMUM GOLD IN SELECT AREA OVER 0.00191/.000075 MINIMUM TIN IN SELECT AREA OVER NICKEL OVERALL.
50 GOLD - 0.00127/.000050 MINIMUM GOLD IN SELECT AREA OVER 0.00254/.000100 MINIMUM TIN IN SELECT AREA OVER NICKEL OVERALL.
* THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.
- PART TO CONFORM TO PS-71308.
- PACKAGING (SEE CHARTS):
BULK: PER PK-70873-0353
TUBES: PER PK-70873-0041.
71308-82** IN TUBES: PER PK-70873-042.
TUBES W/ VAC CAPS: PER PK-70873-0691
TAPE AND REEL W/ VAC CAPS: PER PK-70873-0805.
SEE SHEET 3 FOR TAPE & REEL PRODUCT WITH SHALLOW POCKET REQUIREMENTS.
- TYP. DIMENSIONS FOR LANDS SURROUNDING HOLES FOR RETENTION PEGS.
- PIN SOLERABILITY PER MOLEX SPEC. ES-152.
- SEE SHEETS 2-5 FOR CHARTED DIMS., PART/EDP NO'S, AND VOIDED CIRCUITS.
- PIN PUSHOUT FORCE: 3 LBS. MINIMUM.
- PICK-N-PLACE CAPS WILL BE PLACED SO THAT VACUUM PICK UP AREA WILL BE IN CENTER OF PART.
- COPLANARITY FOR CIRCUIT SIZES UP TO 40 IS 0.15 MM/.006 INCH. FOR CIRCUIT SIZES 42 AND LARGER, CONTACT MOLEX SALES DEPARTMENT.
- THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

DIM. "M"	DIM. "G"
6.10 .240	10.67 .420
8.13 .320	12.70 .500

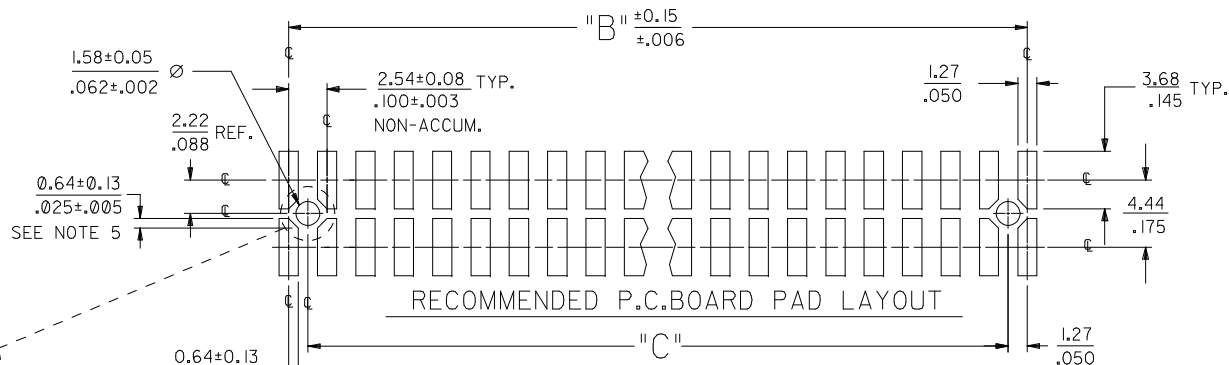


P.C. BOARD PAD LAYOUT
AT ENDS FOR NO PEG VERSION.

ROW "A"
ROW "B"




0.64 ± 0.13
.025 ± .005
SEE NOTE 5


⌀ 0.50/.020 U|X FOR PARTS WITH PEGS
⌀ 0.50/.020 U|Y FOR PARTS WITHOUT PEGS

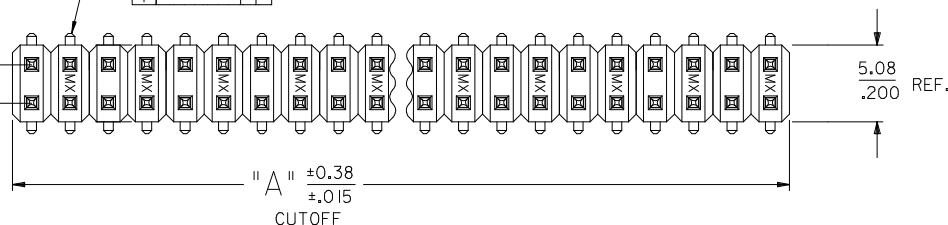

USED TO LOCATE VOIDED CIRCUITS

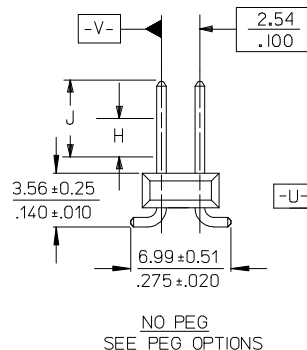

NO PEG
SEE PEG OPTIONS

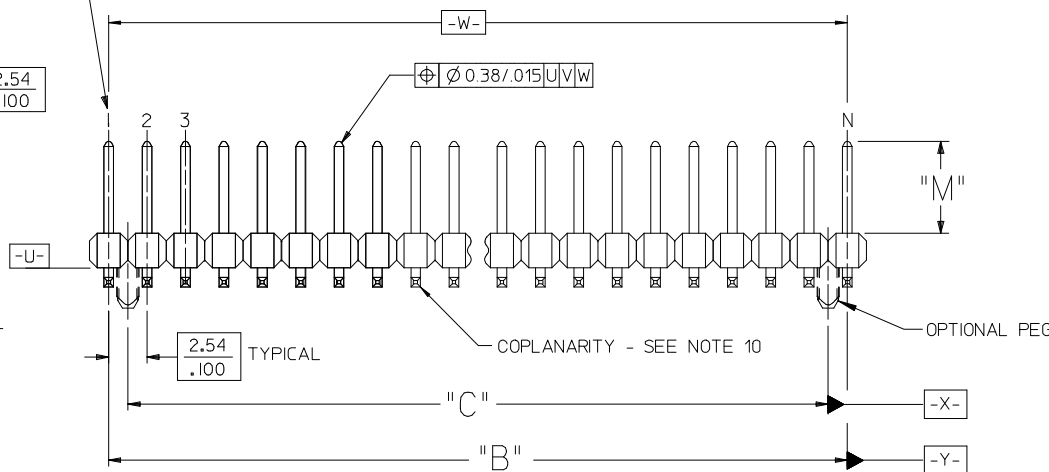

12CKT TAPE & REEL
EC NO: UCP2009-2465
DRWN:KIPPER 2009/08/04
CHKD:SSOUSEK 2009/08/07
APPR:FSMITH 2009/08/10

QUALITY
SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0005
3 PLACES	± .005	± .0005
2 PLACES	± .010	± .0010
1 PLACE	± .025	± .0025
ANGULAR ± 1/2°		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
KMS	1999/10/15

CHECKED BY	DATE
KMS	1999/10/15

APPROVED BY	DATE
KMS	1999/10/15

MATERIAL NO.
SEE TABLES

SCALE
DESIGN UNITS
INCH

THIRD ANGLE
PROJECTION

TITLE
SALES ASSY INSULATOR
DUAL ROW SMT W/BREAK-OFF
.025SQ PIN GULLWING .100

MOLEX INCORPORATED

DOCUMENT NO.
SD-71308-001

SHEET NO.
1 OF 6

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

13		12		11				10		9		8		7		6		5		4		3		2		1	
J		PACKAGING SEE NOTE 4, SHT 1				IN TAPE AND REEL WITH SHALLOW POCKET TAPE								BULK / IN TUBES													
						4-8 CKT		TAPE-N-REEL W/ VAC CAPS		TAPE-N-REEL W/ VAC CAPS						BULK				BULK							
						10-100 CKT		TAPE-N-REEL W/ VAC CAPS		TAPE-N-REEL W/ VAC CAPS						TUBES				TUBES							
						DIM. M±0.25 MM				6.10 (.240)		6.10 (.240)				8.13 (.320)				13.59 (.535)							
						PLATING				30 GOLD		15 GOLD				150 TIN				150 TIN							
						DIM. H				2.54 (.100)		2.54 (.100)				4.57 (.180)				4.57 (.180)							
I		DIM. J				5.08 (.200)		5.08 (.200)				7.11 (.280)		7.11 (.280)													
		EDP NUMBER		EDP NUMBER						EDP NUMBER		EDP NUMBER		CKTS													
H		04		5.08		.200		2.54		.100																04	
		06		7.62		.300		5.08		.200				015-91-6068												06	
		08		10.16		.400		7.62		.300				015-91-6088												08	
		10		12.70		.500		10.16		.400				015-91-6108						713088010		71308-8210				10	
		12		15.24		.600		12.70		.500																12	
		14		17.78		.700		15.24		.600		015-91-6148														14	
		16		20.32		.800		17.78		.700										713088016						16	
		18		22.86		.900		20.32		.800																18	
		20		25.40		1.000		22.86		.900																20	
		22		27.94		1.100		25.40		1.000																22	
		24		30.48		1.200		27.94		1.100																24	
		26		33.02		1.300		30.48		1.200																26	
		28		35.56		1.400		33.02		1.300																28	
		30		38.10		1.500		35.56		1.400																30	
		32		40.64		1.600		38.10		1.500																32	
		34		43.18		1.700		40.64		1.600																34	
		36		45.72		1.800		43.18		1.700																36	
		38		48.26		1.900		45.72		1.800																38	
		40		50.80		2.000		48.26		1.900																40	
		42		53.34		2.100		50.80		2.000																42	
		44		55.88		2.200		53.34		2.100																44	
		46		58.42		2.300		55.88		2.200																46	
		48		60.96		2.400		58.42		2.300																48	
		50		63.50		2.500		60.96		2.400																50	
		52		66.04		2.600		63.50		2.500																52	
		54		68.58		2.700		66.04		2.600																54	
		56		71.12		2.800		68.58		2.700																56	
		58		73.66		2.900		71.12		2.800																58	
		60		76.20		3.000		73.66		2.900																60	
		62		78.74		3.100		76.20		3.000																62	
		64		81.28		3.200		78.74		3.100																64	
		66		83.82		3.300		81.28		3.200																66	
		68		86.36		3.400		83.82		3.300																68	
		70		88.90		3.500		86.36		3.400																70	
		72		91.44		3.600		88.90		3.500																72	
		74		93.98		3.700		91.44		3.600																74	
		76		96.52		3.800		93.98		3.700																76	
		78		99.06		3.900		96.52		3.800																78	
		80		101.60		4.000		99.06		3.900																80	
		82		104.14		4.100		101.60		4.000																82	
		84		106.68		4.200		104.14		4.100																84	
		86		109.22		4.300		106.68		4.200																86	
		88		111.76		4.400		109.22		4.300																88	
		90		114.30		4.500		111.76		4.400																90	
		92		116.84		4.600		114.30		4.500																92	
		94		119.38		4.700		116.84		4.600																94	
		96		121.92		4.800		119.38		4.700																96	
		98		124.46		4.900		121.92		4.800																98	
		100		127.00		5.000		124.46		4.900																100	
B		NO PEG VERSION										REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION			
																		MM/IN		INCH		INCH					
A		(ALSO SEE SHEET 2)										K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY		DATE		TITLE			
																				KMS		1999/10/15				KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		CHECKED BY		DATE		MOLEX INCORPORATED			
																				KMS		1999/10/15				KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVED BY		DATE		MOLEX INCORPORATED			
																				KMS		1999/10/15				KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
																				SEE TABLE		SD-71308-001				3 OF 6	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
																				C							
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY		DATE		TITLE			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		CHECKED BY		DATE		MOLEX INCORPORATED			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVED BY		DATE		MOLEX INCORPORATED			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
																										SEE TABLE	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY		DATE		TITLE			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		CHECKED BY		DATE		MOLEX INCORPORATED			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVED BY		DATE		MOLEX INCORPORATED			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
																										SEE TABLE	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY		DATE		TITLE			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		CHECKED BY		DATE		MOLEX INCORPORATED			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVED BY		DATE		MOLEX INCORPORATED			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
																										SEE TABLE	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY		DATE		TITLE			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		CHECKED BY		DATE		MOLEX INCORPORATED			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVED BY		DATE		MOLEX INCORPORATED			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
																										SEE TABLE	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY		DATE		TITLE			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		CHECKED BY		DATE		MOLEX INCORPORATED			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVED BY		DATE		MOLEX INCORPORATED			
																										KMS	
												K3		REV		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
																										SEE TABLE	
												K3															

[illegible]

