

CRYSTAL CONTROLLED OSCILLATORS

SURFACE MOUNT STRATUM 3E HCMOS VCOCXO

ABSOLUTE MAXIMUM RATINGS
TABLE 1.0

PARAMETER	UNITS	MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Storage Temperature		-40	-	85	°C	
Supply Voltage	(Vcc)	-0.5	-	7	Vdc	

OPERATING SPECIFICATIONS
TABLE 2.0

PARAMETER		MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Center Frequency	(Fo)		10 12.8		MHz	1
Frequency Calibration		-0.2		0.2	ppm	2
Frequency vs. Temperature Stability		-10	-	10	ppb	3
Aging: Daily		-1	-	1	ppb/day	4
Aging: First Year		-30	-	30	ppb	
Aging: Short Term (1Sec.)		-	5.00E-11	-	RMS	5
Aging: Long Term (20 Years)		-	-	300	ppb	
Operating Temperature Range		0	-	70	°C	
Supply Voltage	(Vcc)	4.75	5.00	5.25	Vdc	
Frequency vs. Voltage Stability (+/-1%)		-0.5	-	0.5	ppb	
Frequency vs. Load Stability (+/-20%)		-0.5	-	0.5	ppb	
Power Consumption: Turn On		-	-	2.75	W	6
Power Consumption: Steady-State		-	-	1.50	W	6
Start-Up Time				500	mS	7
Warm Up		-100	-	100	ppb	8
2G Tip-over		-	-	5	ppb/G	
TDEV at 300 seconds		-	-	5	nS	
TDEV at 40 seconds		-	-	1	nS	

INPUT CHARACTERISTICS
TABLE 3.0


PARAMETER		MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Control Voltage (Pin 1)	Vc	0.5	2.5	4.5	Vdc	
Deviation @ 25°C referenced to Fo		±0.3	-	±1.0	ppm	9
Input Impedance (Pin 1)		50K	-	-	Ohm	

HCMOS OUTPUT CHARACTERISTICS
TABLE 4.0

PARAMETER		MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
LOAD		12	15	18	pF	10
Voltage (High)	(Voh)	Vcc-0.2V	-	-	Vdc	
(Low)	(Vol)	-	-	0.2	Vdc	
Duty Cycle at 50% of Vcc		45	50	55	%	
Rise / Fall Time 10% to 90%		-	-	5	nS	
Spurious Output				-80	dBc	
SSB Phase Noise at 1Hz offset		-	-	-90	dBc/Hz	
SSB Phase Noise at 10Hz offset		-	-	-115	dBc/Hz	
SSB Phase Noise at 100Hz offset		-	-	-130	dBc/Hz	
SSB Phase Noise at 1KHz offset		-	-	-135	dBc/Hz	
SSB Phase Noise at 10KHz offset		-	-	-140	dBc/Hz	

RESTALLIZATION TIME
TABLE 5.0

Off Time	Restabilization Time	NOTE
< 1 Hour	< 2 Hours	11
< 6 Hours	< 12 Hours	11
< 24 Hours	< 48 Hours	11
1 to 16 Days	48 Hours + ¼ Off Time	11
> 16 Days	< 6 Days	11



ASOV5S3E

DESCRIPTION

The Connor-Winfield ASOV5S3E is a 5V Surface Mount Voltage Controlled Oven Controlled Crystal Oscillator (VCOCXO) with an HCMOS output. The ASOV5S3E is designed for Stratum 3E applications requiring low jitter and tight frequency stability.

FEATURES

VARIABLE FREQUENCY, VCOCXO

DESIGNED TO MEET STRATUM 3E REQUIREMENTS

FREQUENCY STABILITY ±10ppb

5.0V OPERATION

HCMOS OUTPUT

SURFACE MOUNT PACKAGE

TAPE AND REEL PACKAGING

RoHS 5/6 COMPLIANT

ORDERING INFORMATION

ASOV5S3E - 10.00MHz

OCXO
SERIES

CENTER
FREQUENCY

Specifications subject to change without notice.

CRYSTAL CONTROLLED OSCILLATORS

PACKAGE CHARACTERISTICS

TABLE 6.0

Package	Non-hermetic package consisting of an FR4 substrate with grounded metal cover.
---------	--

ENVIRONMENTAL CHARACTERISTICS

TABLE 7.0

Shock	100G's, 6mS, halfsine per MIL-STD-202F, Method 213B, Test Condition C
Vibration	0.06" D.A. or 10G peak 10 to 500 Hz, per MIL-STD-202F, Method 204D, Test condition A

PROCESS RECOMMENDATIONS

TABLE 8.0

Soldering Process	See solder profile
Wash	Ultrasonic cleaning is not recommended.

Notes:


- 1) Labels will include the calibration frequency at the time of ship.
- 2) Initial calibration @ 25 C at the time of shipment, Vc=2.5Vdc.
- 3) Overall frequency stability, 0 to 70 C.
- 4) After ten days of continuous operation.
- 5) Allen Variance: 1 second, 100 average.
- 6) Vcc = 5.0Vdc.
- 7) From Vcc=90% of final value. No more than 16 transitions at start-up before oscillator has started.
- 8) Measured @ 0 C, within 5 minutes, referenced one hour after turn-on.
- 9) Positive slope
- 10) HCMOS load.
- 11) For a given off time, the time required to meet daily aging, short-term stability and TDEV requirements.

Pin Connections


Pin	Function
1	Control Voltage
2	Ground
6	N/C
7	Ground
8	Vcc
9	Vcc
10	Ground
11	Ground
12	N/C
13	Ground
14	Output
15	Ground
16	N/C

Dimensional Tolerance:
±.005 (.127mm)


Package Layout

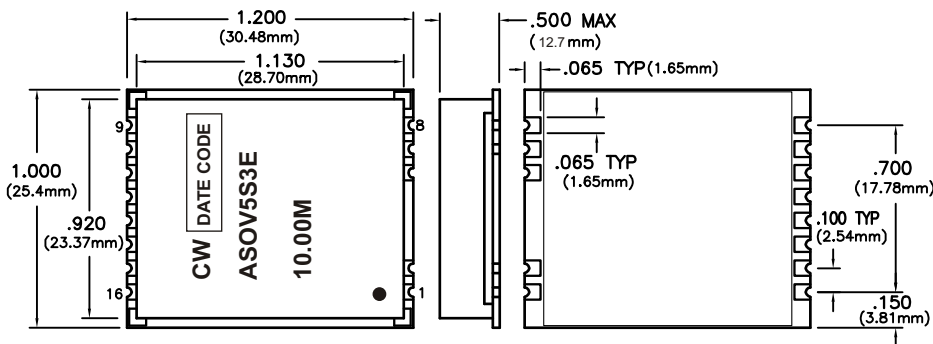


Suggested Pad Layout

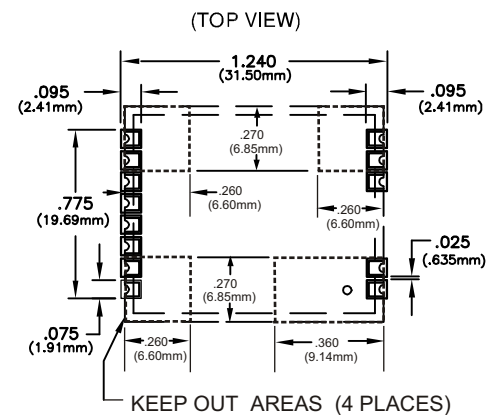

Test Circuit

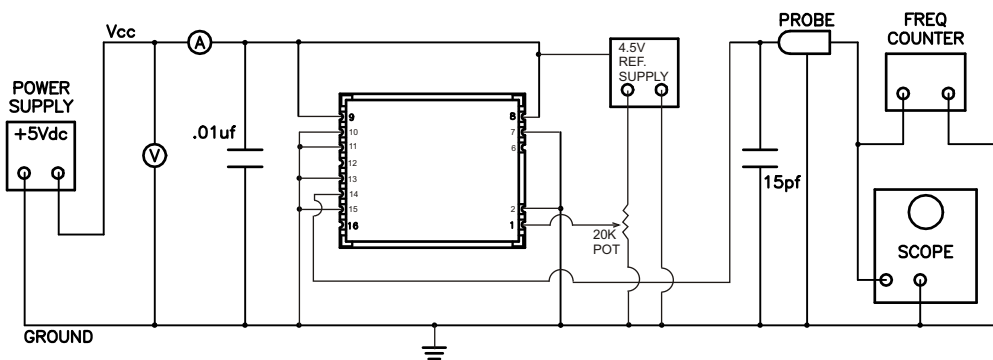

Solder Profile

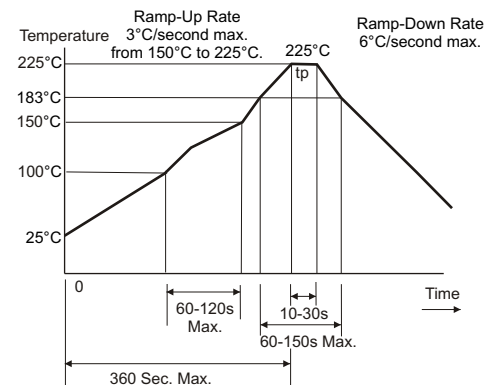

Specifications subject to change without notice.