

HSF



NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: LCP+30%G.F UL94V-0





Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

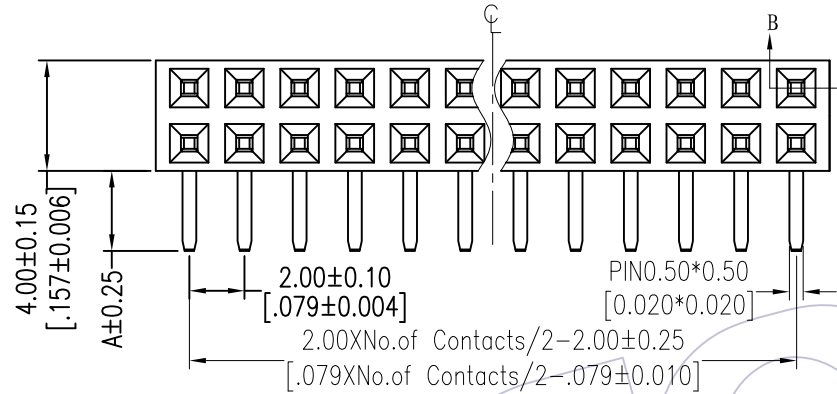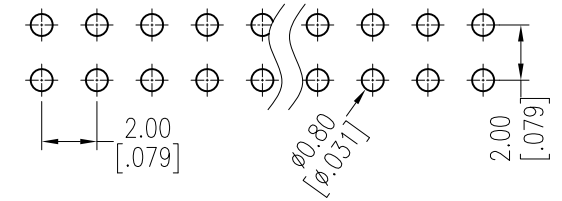

Ordering Information

2263 - 2 XX R XX D Y N T X

No. of Pins per ROW: 02-40PIN	Contact Plating: G0=Gold Flash G3=10μ"Gold G4=15μ"Gold G5=30μ"Gold S0=Gold Flash/Tin S3=10μ"Gold/Tin S4=15μ"Gold/Tin S5=30μ"Gold/Tin SN=Tin SM=Matte Tin	Insulator: D=LCP	Packing: T=Tube
-------------------------------	--	---------------------	--------------------

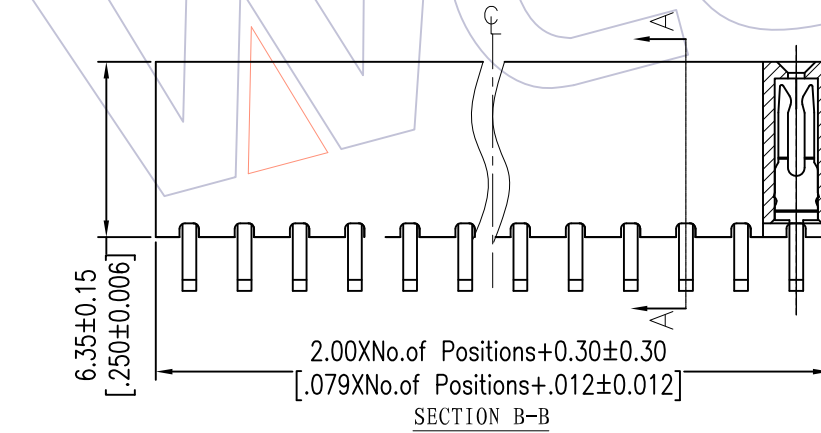

Item	Pitch	DIM A	Mating
Standard	2.00	2.90	1215/1220
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW Wang	DATE 2013/03/15	SCALE UNIT mm	FIT A4	PART NO. 2263-2XXRXXDYNTX
				X.X	±0.40					
A1	2013/03/15	Modify drawing	-----	X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: FH2.00mm SINGLE ROW 90° DIP H=6.35
A0	2012/12/07	NEW	-----	X.XXX	±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle	± 3°			PROJ.		
				DIM	TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--