
REV	DATE	ECO#
A	12/14/92	1232

DRAWING NOT TO SCALE
ALL DIMENSIONS IN INCHES

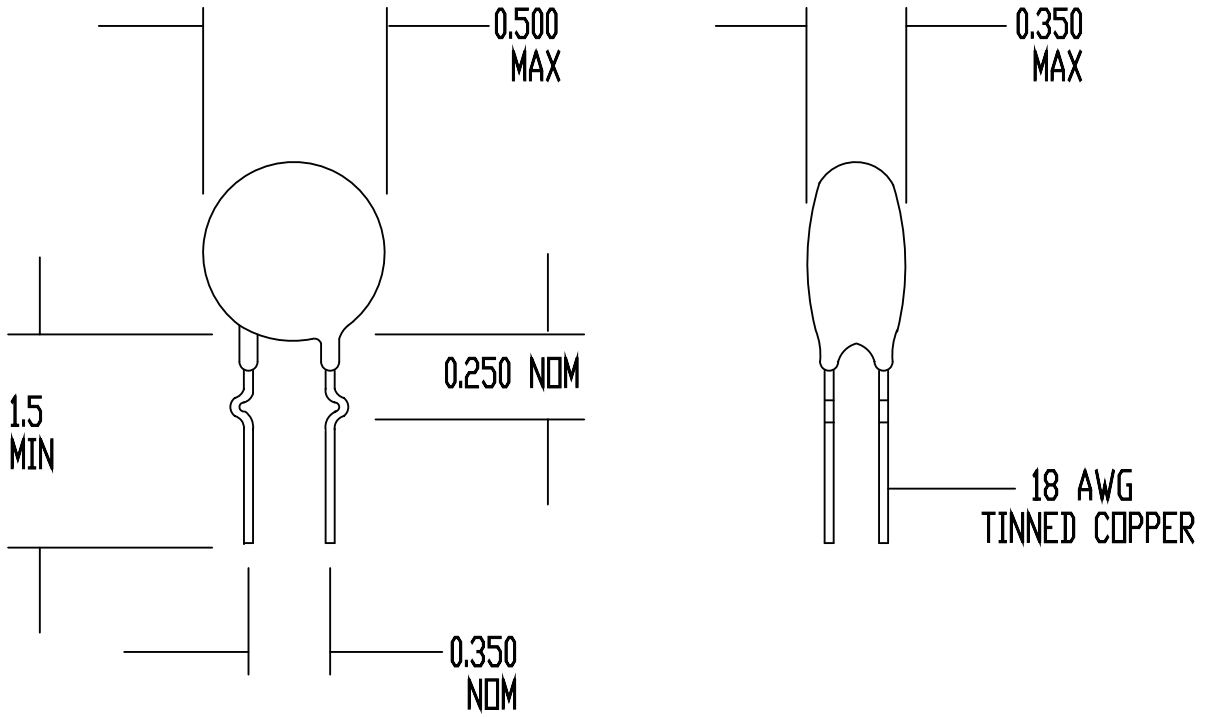

SPECIFICATIONS:

RESISTANCE AT 25 DEG C = 12 OHMS +/- 10%
MAXIMUM CONTINUOUS CURRENT (Imax) = 4 AMPS
RESISTANCE AT Imax = 0.22 OHMS NOMINAL
MAXIMUM VOLTAGE RATING = 265 VAC (RMS)
MAXIMUM SURGE RATING = 40 JOULES
ENCAPSULATION = SILICONE RESIN
MARKING = OPTIONAL
LEADS = RODAN P/N STL-209-35

DRAWN BY D. NGUYEN		AMETHERM Circuit Protection Thermistors
DATE 11/05/90	ORIG. F. TISEO	
REV A	APP	SURGE-GARD INRUSH CURRENT LIMITER
SHEET 1 OF 1		SG339