
"High Frequency Ceramic Solutions"

Miniature 2.45GHz 1:1 RF Balun **P/N 2450BL07A0050**

Detail Specification: 08/02/12

General Specifications	
Part Number	2450BL07A0050
Frequency (MHz)	2400~2500
Unbalanced Impedence	50 Ω
Differential Balanced Impedance	50 Ω
Insertion Loss	1.0 dB max.
Return Loss	9.5 min.
Phase Difference (degree)	180 ± 10
Amplitude Difference	2.0 dB max.
Operating Temperature	-40 to +85°C
Power Capacity	2 Watt max.



Recommended Storage Conditions	+5 to +35˚C, Humidity 45~75%RH
Reel Quanity	10,000
Storage Period	18 months max.


Part Number Explanation

P/N Suffix	**Packing Style**	Bulk	Suffix = S	eg. 2450BL07A0050S
		T & R (10000 pcs)	Suffix = E	eg. 2450BL07A0050T
	Termination style	100% Tin	Suffix = None	eg. 2450BL07A0050 (T or S)
	Evaluation Board	2450BL07A0050-EBSMA (x3 SMA Connectors)		

Mechanical Dimensions


	In	mm
L	0.039 ± 0.004	1.00 ± 0.10
W	0.020 ± 0.004	0.50 ± 0.10
T	0.015 ± 0.020	0.37 ± 0.50
a	0.004 + 0.004 / -0.002	0.10 + 0.10 / -0.05
b	0.010 + 0.004 / -0.002	0.25 + 0.10 / -0.05
c	0.004 + 0.004 / -0.002	0.10 + 0.10 / -0.05

Unit : mm

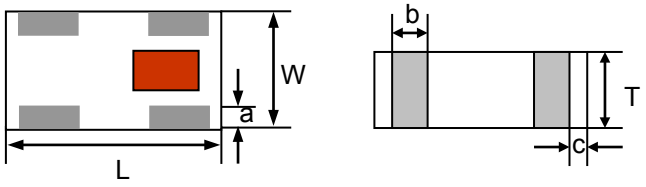

Terminal Configuration

No.	Function
1	Unbalanced Port (IN)
2	Balanced Port (OUT1)
3	Balanced Port (OUT2)
4	GND



JOHANSON TECHNOLOGY

www.johansontechnology.com


4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2012 Johanson Technology, Inc. All Rights Reserved

Miniature 2.45GHz 1:1 RF Balun **P/N 2450BL07A0050**


Detail Specification: 08/02/12

Measuring Diagram

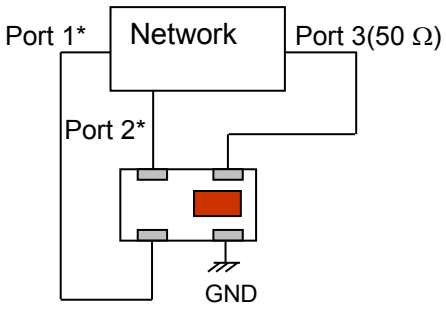

Port 3:Unbalanced Port
Ports 1 and 2: Balanced Port
IL=Sds21
RL=Sss11
Amp_balance = dB(S(2,3)/S(1,3))
Phase_balance = Phase(S(2,3)/S(1,3))
*Impedance for ports 1 and 2 = Balanced Impedance/2
**E5071B from Agilent

Equivalent Circuit

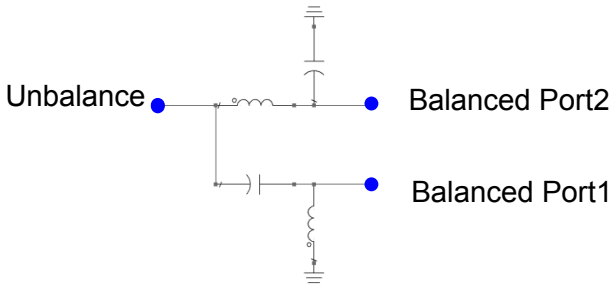


Mounting Considerations

* Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

LEGEND

- Solder Resist
- Land
- Through-hole (ϕ0.3)

Unit : mm

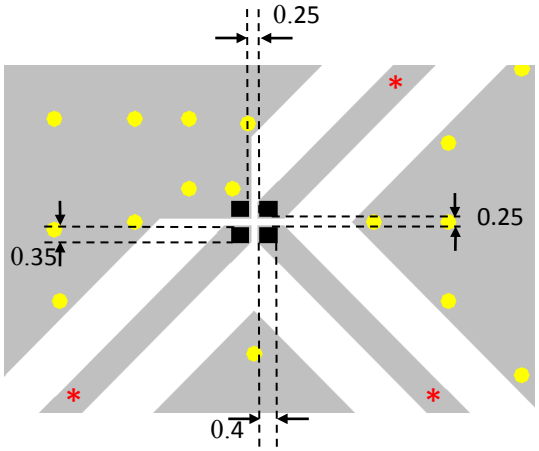

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

JOHANSON TECHNOLOGY

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821


2012 Johanson Technology, Inc. All Rights Reserved

Miniature 2.45GHz 1:1 RF Balun **P/N 2450BL07A0050**


Detail Specification: 08/02/12

Typical Electrical Performance (T=25°C)

Insertion and Return Loss

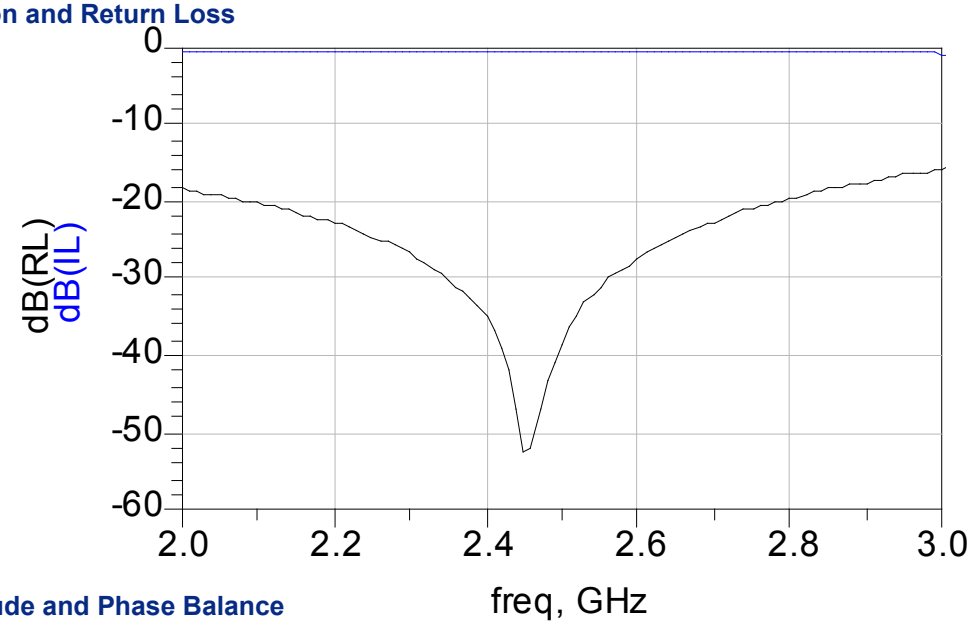

Amplitude and Phase Balance

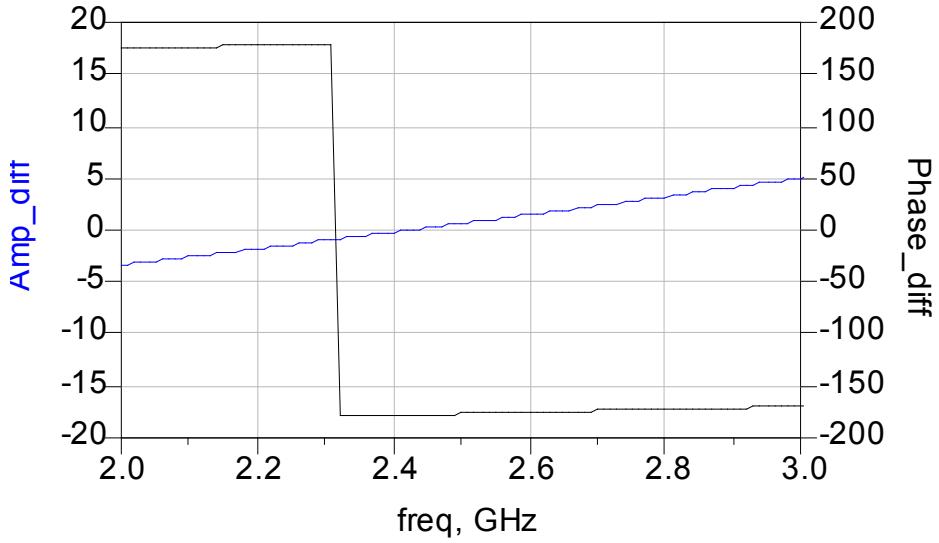

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

JOHANSON TECHNOLOGY

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2012 Johanson Technology, Inc. All Rights Reserved