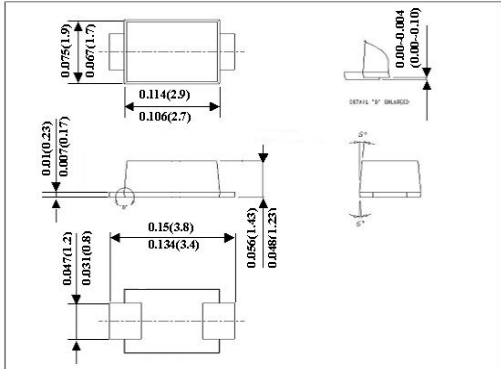


	<div>SS22L THRU SS210L</div> <div>2.0 AMPS. Surface Mount Schottky Barrier Rectifiers</div>								
				<div>Voltage Range</div> <div>20 to 100 Volts</div> <div>Current</div> <div>2.0 Amperes</div>					
<div>Features</div> <div><div>✧ For surface mounted application</div><div>✧ Low –PROFILE PACKAGE</div><div>✧ Ideal for automated placement</div><div>✧ Low power loss, high efficiency</div><div>✧ High temperature soldering: 260°C / 10 seconds at terminals</div></div>				<div>Sub SMA</div> <div></div> <div>Dimensions in inches and (millimeters)</div>					
<div>Mechanical Data</div> <div><div>✧ Cases: Sub SMA plastic case</div><div>✧ Polarity: Color band denotes cathode end</div><div>✧ Packaging: 12mm tape per EIA STD RS-481</div><div>✧ Weight approx. 15mg</div></div>									
<div>Maximum Ratings and Electrical Characteristics</div> <div>Rating at 25°C ambient temperature unless otherwise specified.</div> <div>Single phase, half wave, 60 Hz, resistive or inductive load.</div> <div>For capacitive load, derate current by 20%</div>									
Type Number	Symbol	SS 22L	SS 23L	SS 24L	SS 25L	SS 26L	SS 29L	SS 210L	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	90	100	V
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	63	70	V
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	90	100	V
Marking Code (Note 4)		22LYM	23LYM	24LYM	25LYM	26LYM	29LYM	210LYM	
Maximum Average Forward Rectified Current at T _J (See Fig. 1)	I _(AV)	2.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	50							A
Maximum Instantaneous Forward Voltage (Note 1) @ 2.0A	V _F	0.5		0.70		0.85		V	
Maximum DC Reverse Current @ T _A =25°C at Rated DC Blocking Voltage @ T _A =100°C	I _R	0.4					0.1		mA mA
		20		10.0		20			
Typical Junction Capacitance (Note 3)	C _j	130							pF
Typical Thermal Resistance (Note 2)	R θ JL	17							°C/W
	R θ JA	75							°C/W
Operating Temperature Range	T _J	-65 to +125			-65 to +150				°C
Storage Temperature Range	T _{STG}	-65 to +150							°C

Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle
 2. Measured on P.C.Board with 0.27 x 0.27" (7.0 x 7.0mm) Copper Pad Areas.
 3. Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.
 4. 22LYM: 2=2A, 2=20V, L-Low Profile, Y-Year Code, M-Month Code.

RATINGS AND CHARACTERISTIC CURVES (SS22L THRU SS210L)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

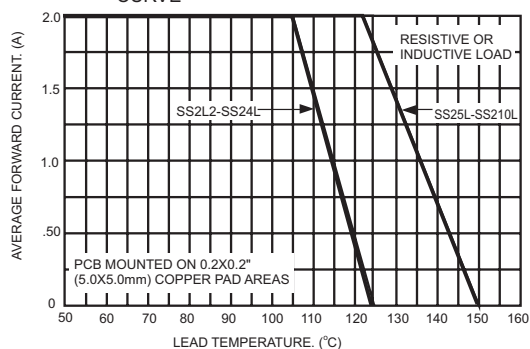


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

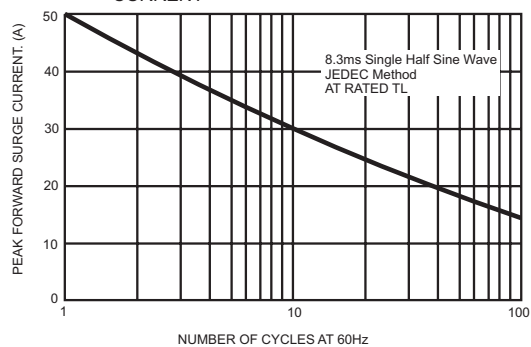


FIG.3- TYPICAL FORWARD CHARACTERISTICS

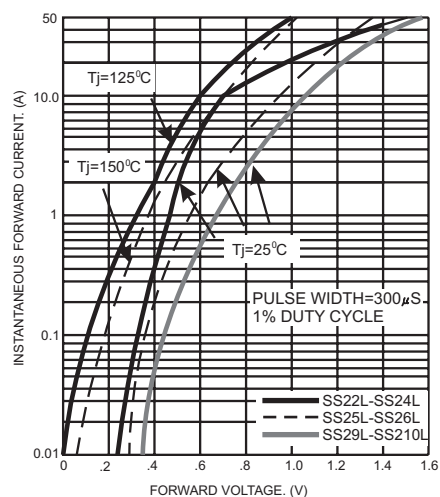


FIG.4- TYPICAL REVERSE CHARACTERISTICS

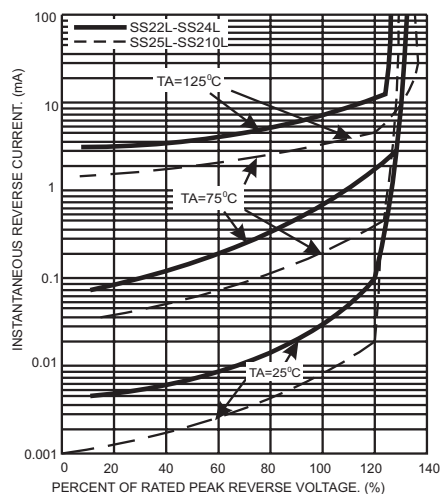


FIG.5- TYPICAL JUNCTION CAPACITANCE

