


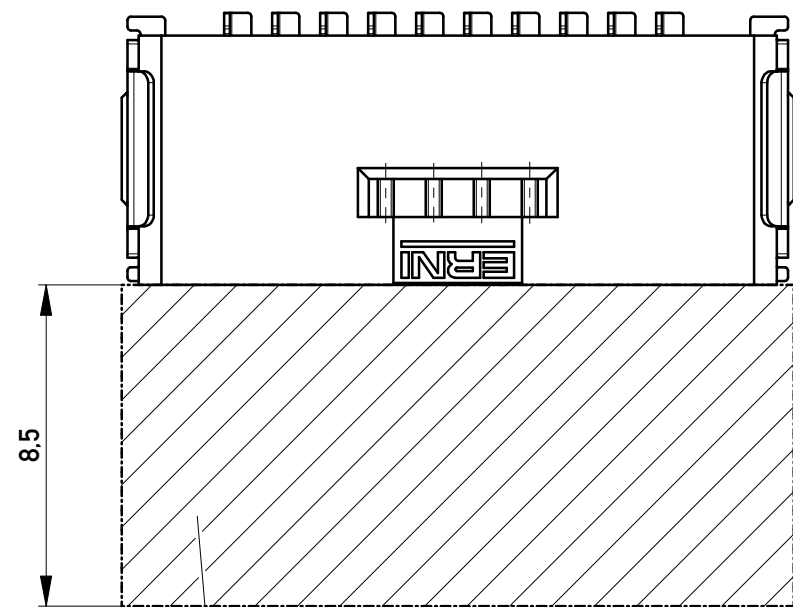
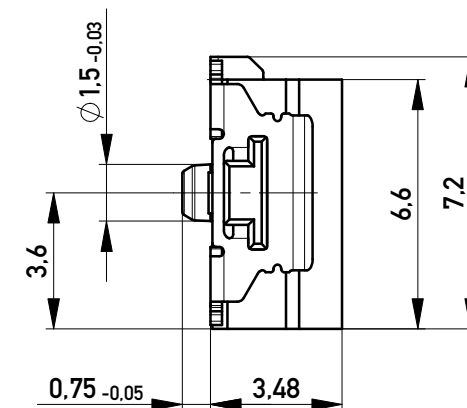
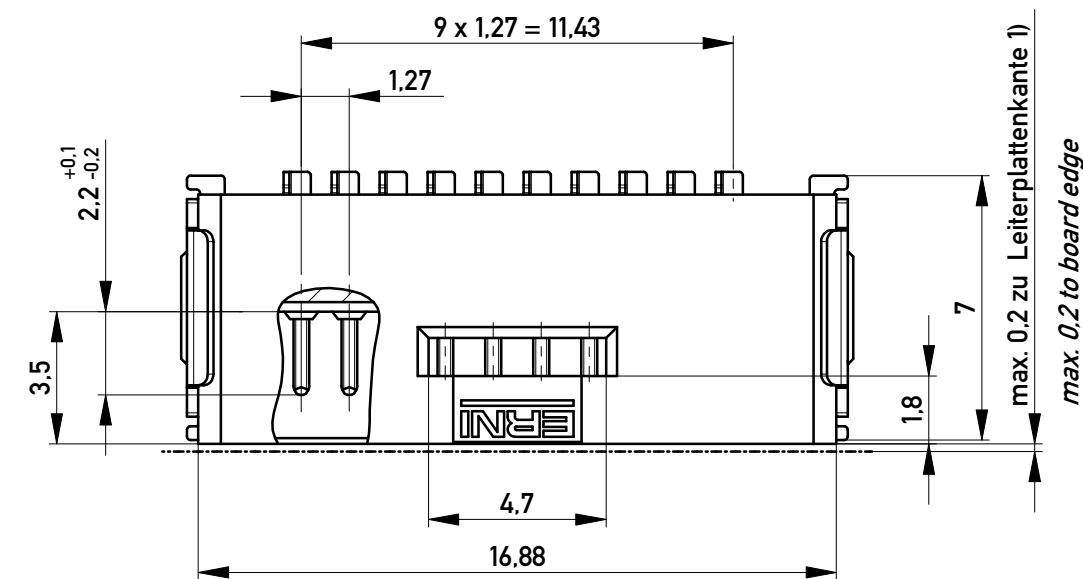


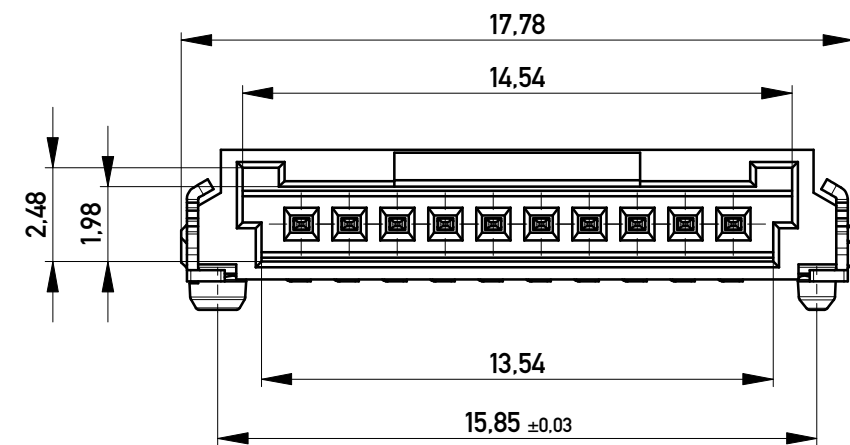

Sperrfläche für Leiterbahnen
gültig bei Verwendung von
Gegenstecker Federleiste 90°
in SKV Ausführung
*Restricted area for conductors
valid for use by mating
female connector 90°
in IDC version*

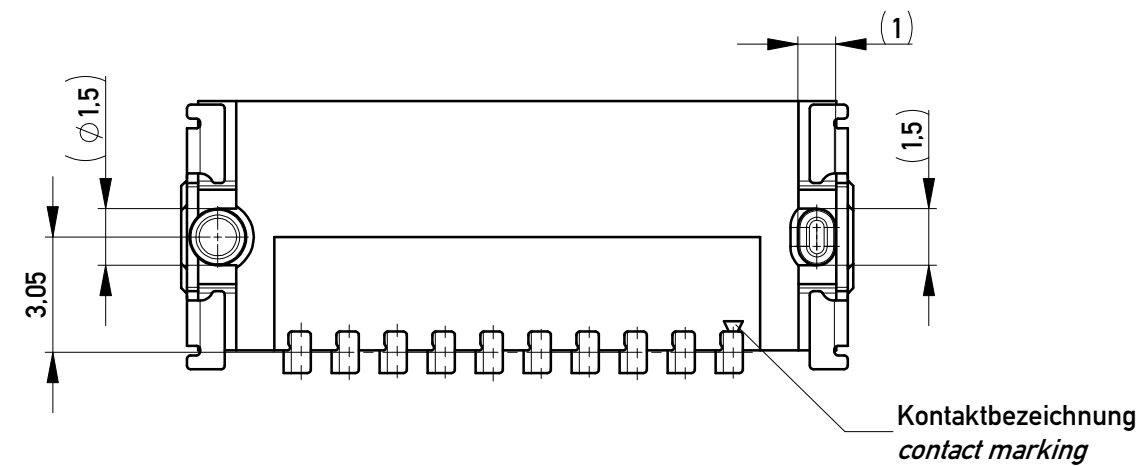

Leiterplatten-Layout für SMT PCB-Layout for SMT

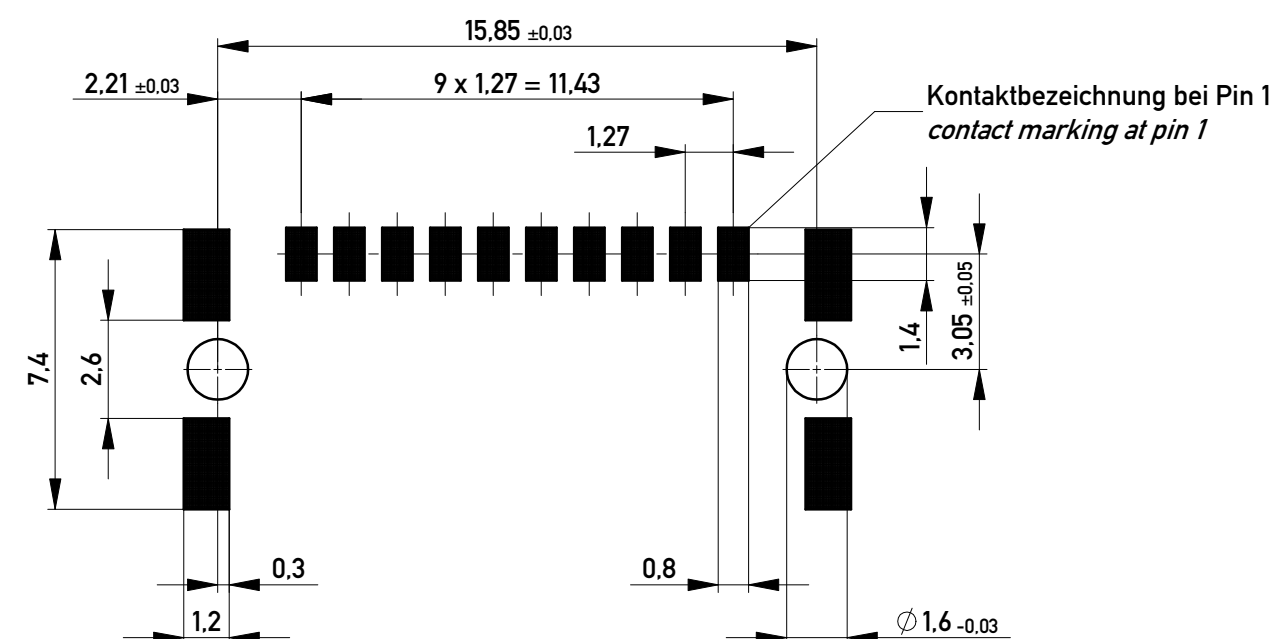

1) gültig bei Verwendung von Gegenstecker
Federleiste 90° in SMD Ausführung
*valid for use by mating female connector 90°
in SMD version*


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Verpackt im Gurt nach DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 1000 Stück
Packaging unit: 1000 pcs

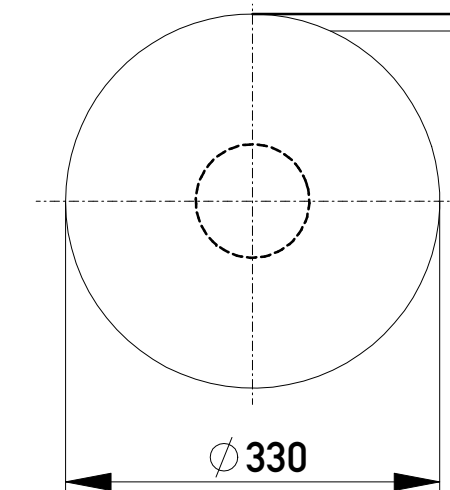


Abspulrichtung - *Reel off Direction*

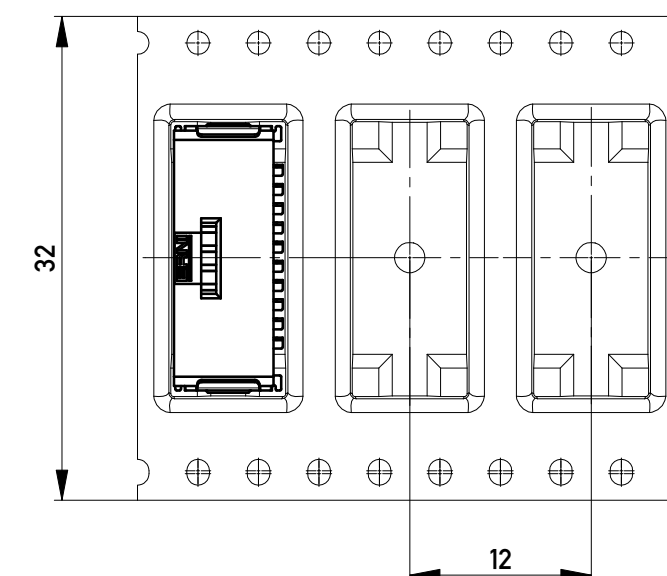

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16064 to be observed.

Copyright by ERNI Production GmbH. No reproduction or translation of this drawing is permitted without written notice pursuant to ISO 9001 to be observed.

Information:			Tolerances		 All Dimensions in mm		Scale		5:1		Für die Anforderung nach PG 9 der LV214 (Koshiri-Sicherheit) <i>For the requirement of the LV214 PG 9 (Koshiri-security)</i>	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.		Designation							
					M 1,27 SRC A, 10-polig KS <i>M 1,27 SRC A, 10-pin KS</i>							
					110702000001							
b		29.09.2015			www.ERNI.com		Class		SRCA			
Index		Date							K A2			