

6

5

4






3

2


1

**MATERIAL AND FINISH:**  
 Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated  
 PDSN-28-1A (wire leads): PVC, 26 AWG  
 Contact & terminals:  
 PDSN-28-1B: Brass, Nickel plated  
 PDSN-28-1C: Brass, Nickel plated


Spring: Spring Steel, Nickel plated imbedded in Polypropylene  
**ENVIRONMENTAL:**  
 Operating temperature: -5°C to +83°C

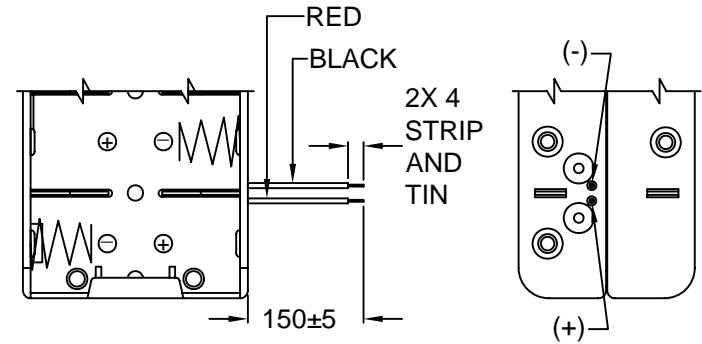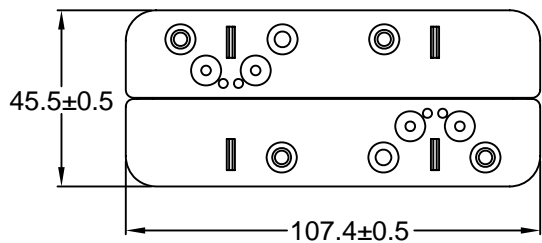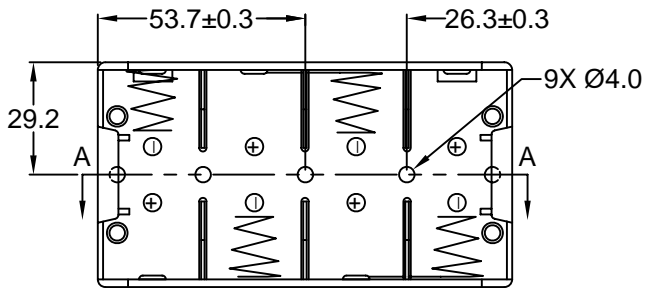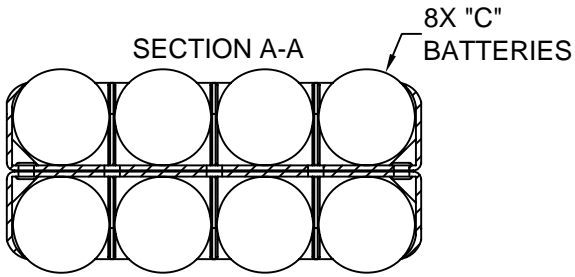

PDSN-28-1A WIRE LEADS

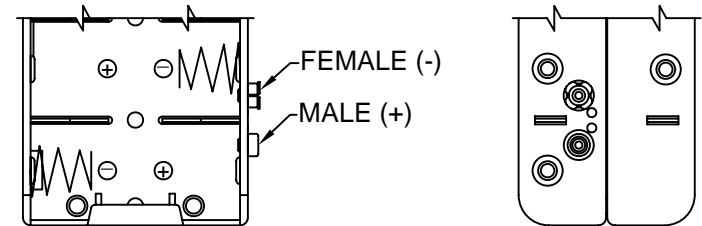

PDSN-28-1B SNAP TERMINAL

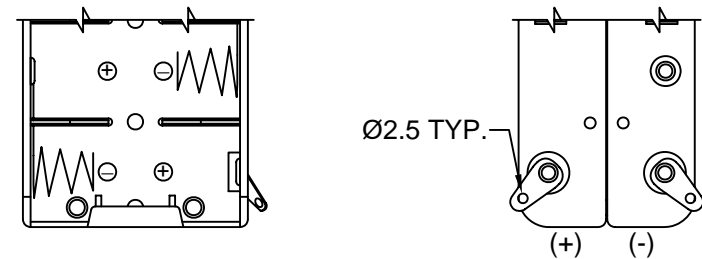

PDSN-28-1C SOLDER LUGS

REVISIONS

REV	DATE	CHANGE	CHNG	CHK	APPR
D6	3/25	MATERIAL CHANGE	TM	KH	SS
B	2/17/00	UPDATED DRAWING	PB	JJ	SS
C	05/22/02	UPDATED / REVISED	GC	TD	PB

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20
DRAWN BY	TM
DATE:	3/21/94
CHECK BY	KH
DATE:	3/21/94
APPR BY	SS
DATE:	3/21/94

**Power Dynamics, Inc.**  
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 8 CELL TYPE "C" BATTERY HOLDER  
 SIDE BY SIDE

**PDSN-28-1X**

ALL DIMENSIONS FOR REFERENCE ONLY  
 DIMENSIONS ARE IN MILLIMETERS

SHEET 1 of 1  
 REV: C

6

5

4

3

2

1