

# APPROVAL SPECIFICATIONS

Title. IPX7 防水3.5耳机插座

Product Model. PJ-5410-BS1

Customer's Part NO.

Customer's Model:

## **Customer's Approval Requested.**


Please return this copy as a certification of your approval.

Checked by: \_\_\_\_\_ Date: \_\_\_\_\_












Approved by: \_\_\_\_\_ Date: \_\_\_\_\_

APPROVE	REVIEW	POLT
王凯	林永坚	陈旺

**XUNPU ELECTRONICS CO.,LTD**

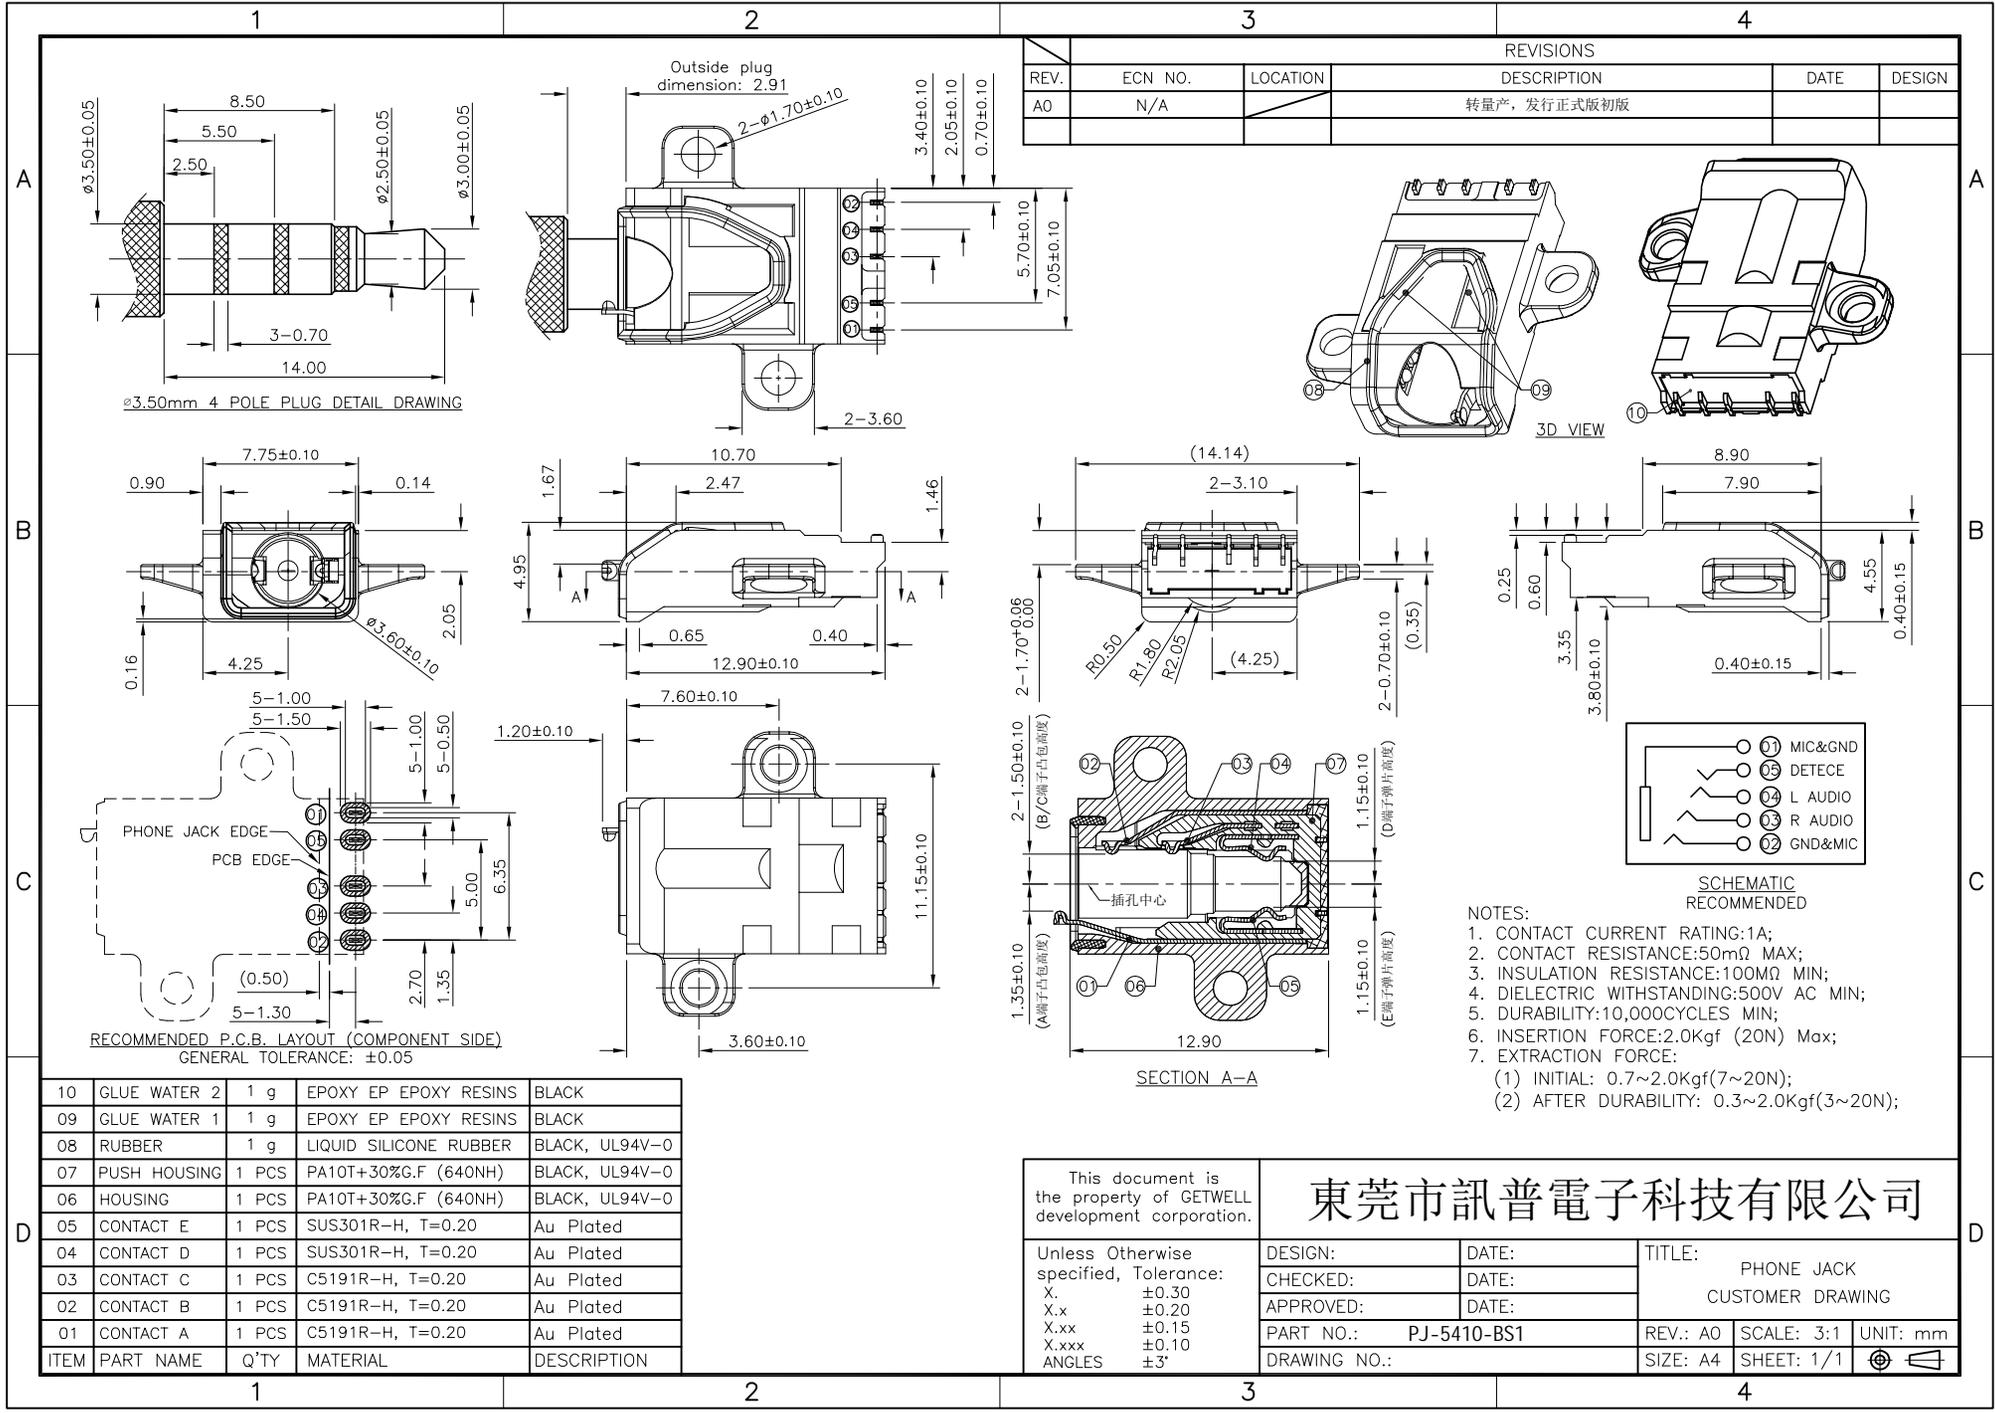

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		转量产, 发行正式版初版		

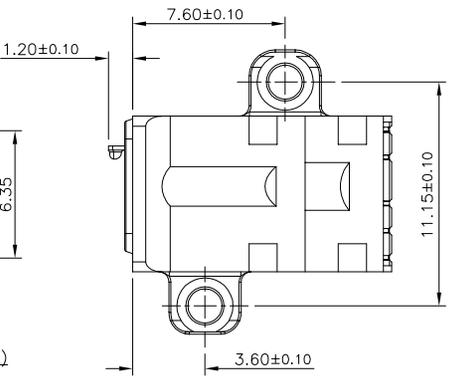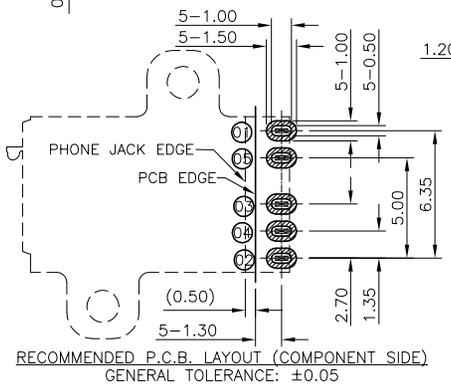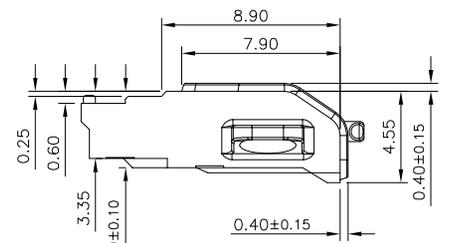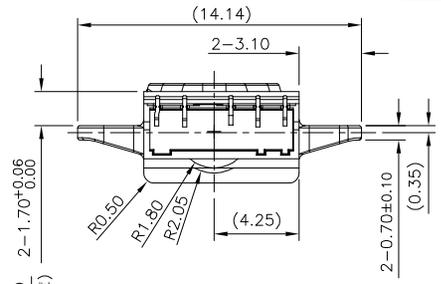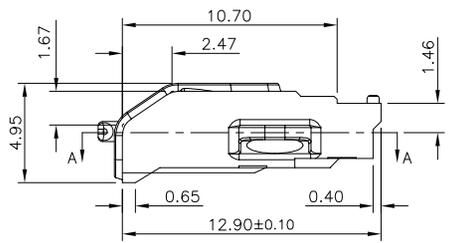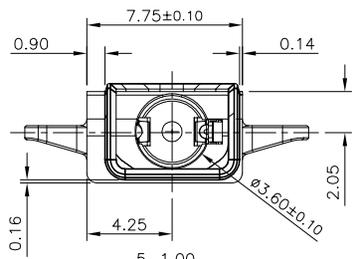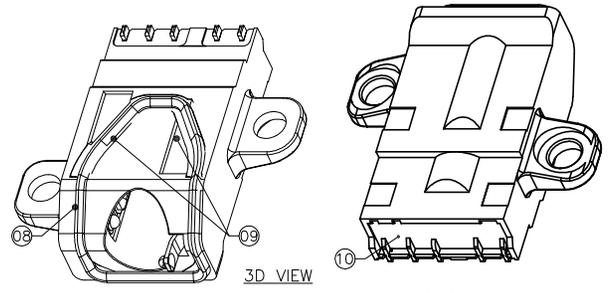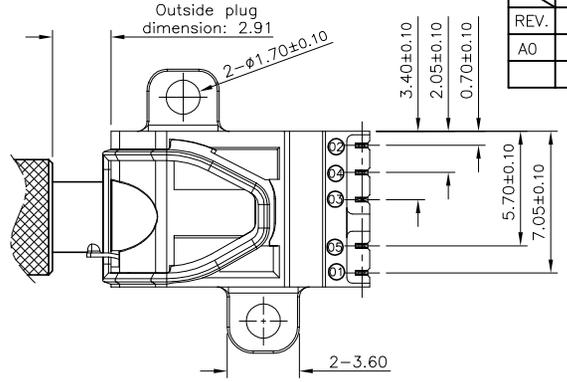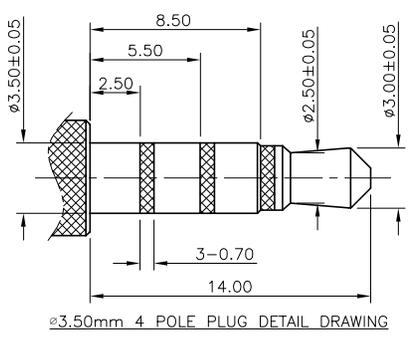

- NOTES:
- CONTACT CURRENT RATING:1A;
  - CONTACT RESISTANCE:50mΩ MAX;
  - INSULATION RESISTANCE:100MΩ MIN;
  - DIELECTRIC WITHSTANDING:500V AC MIN;
  - DURABILITY:10,000CYCLES MIN;
  - INSERTION FORCE:2.0Kgf (20N) Max;
  - EXTRACTION FORCE:
    - INITIAL: 0.7~2.0Kgf(7~20N);
    - AFTER DURABILITY: 0.3~2.0Kgf(3~20N);

10	GLUE WATER 2	1 g	EPOXY EP EPOXY RESINS	BLACK
09	GLUE WATER 1	1 g	EPOXY EP EPOXY RESINS	BLACK
08	RUBBER	1 g	LIQUID SILICONE RUBBER	BLACK, UL94V-0
07	PUSH HOUSING	1 PCS	PA10T+30%G.F (640NH)	BLACK, UL94V-0
06	HOUSING	1 PCS	PA10T+30%G.F (640NH)	BLACK, UL94V-0
05	CONTACT E	1 PCS	SUS301R-H, T=0.20	Au Plated
04	CONTACT D	1 PCS	SUS301R-H, T=0.20	Au Plated
03	CONTACT C	1 PCS	C5191R-H, T=0.20	Au Plated
02	CONTACT B	1 PCS	C5191R-H, T=0.20	Au Plated
01	CONTACT A	1 PCS	C5191R-H, T=0.20	Au Plated
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION

This document is the property of GETWELL development corporation.

## 東莞市訊普電子科技有限公司

Unless Otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 ANGLES ±3'	DESIGN:	DATE:	TITLE: PHONE JACK CUSTOMER DRAWING			
	CHECKED:	DATE:				
	APPROVED:	DATE:	PART NO.: PJ-5410-BS1	REV.: A0	SCALE: 3:1	UNIT: mm
	DRAWING NO.:			SIZE: A4	SHEET: 1/1	