



# Photointerrupter Product Data Sheet

## LTH-301A

Spec No.: DS-55-92-0001

Effective Date: 03/05/2002

Revision: A

**LITE-ON DCC**


**RELEASE**

BNS-OD-FC001/A4

## FEATURES

- \* NON-CONTACT SWITCHING.
- \* FOR DIRECT PC BOARD OR DUAL-IN-LINE SOCKET MOUNTING.
- \* FAST SWITCHING SPEED.

## PACKAGE DIMENSIONS

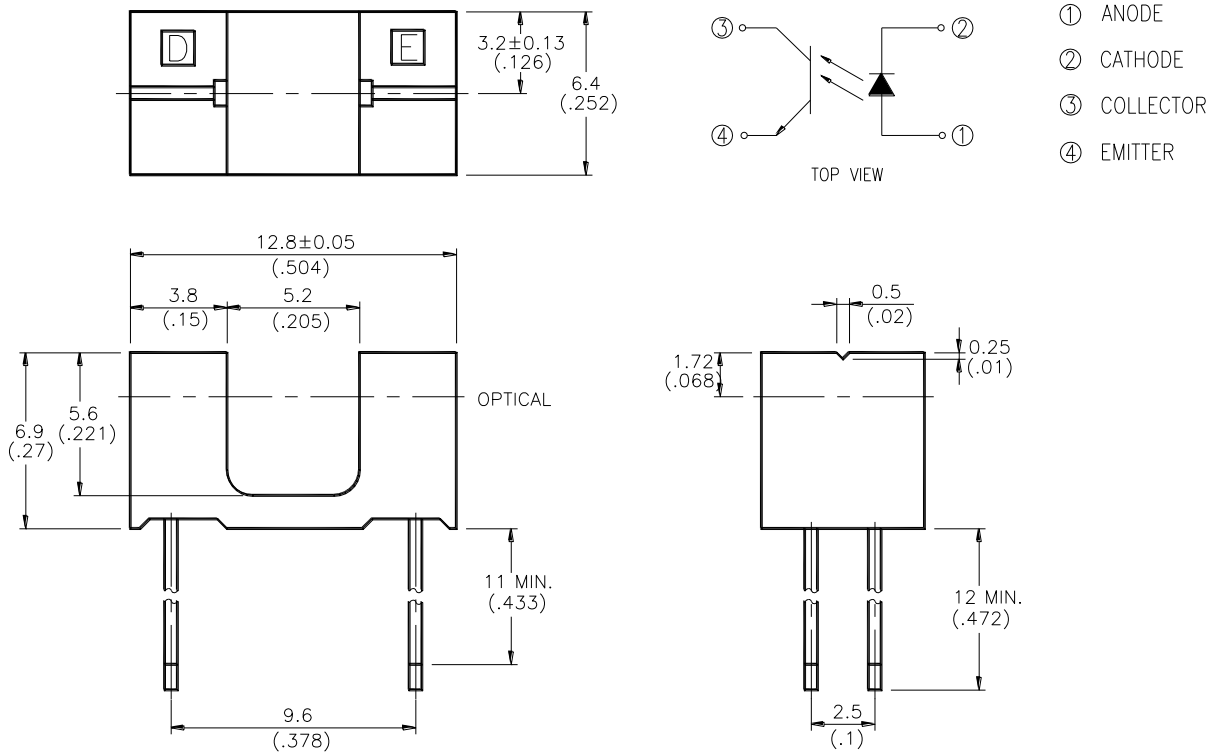

### NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25mm(.010") unless otherwise noted.
3. Specifications are subject to change without notice.

**ABSOLUTE MAXIMUM RATINGS AT T<sub>A</sub>=25°C**

PARAMETER	MAXIMUM RATING	UNIT
<b>INPUT LED</b>		
Power Dissipation	75	mW
Peak Forward Current ( 300 pps , 10 $\mu$ S pulse )	1	A
Continuous Forward Current	50	mA
Reverse Voltage	5	V
<b>OUTPUT PHOTOTRANSISTOR</b>		
Power Dissipation	100	mW
Collector-Emitter Voltage	30	V
Emitter-Collector Voltage	5	V
Collector Current	20	mA
Operating Temperature Range	-25°C to + 85°C	
Storage Temperature Range	-40°C to + 100°C	
Lead Soldering Temperature [ 1.6mm (.063") Form Case ]	260°C for 5 Seconds	

## ELECTRICAL OPTICAL CHARACTERISTICS AT T<sub>A</sub>=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
<b>INPUT LED</b>						
Forward Voltage	V <sub>F</sub>		1.2	1.6	V	I <sub>F</sub> = 20mA
Reverse Current	I <sub>R</sub>			100	μA	V <sub>R</sub> =5V
<b>OUTPUT PHOTOTRANSISTOR</b>						
Collector-Emitter Breakdown Voltage	V(BR) <sub>CEO</sub>	30			V	I <sub>C</sub> =1mA
Emitter-Collector Breakdown Voltage	V(BR) <sub>ECO</sub>	5			V	I <sub>E</sub> =100 μA
Collector-Emitter Dark Current	I <sub>CEO</sub>			100	nA	V <sub>CE</sub> =10V
<b>COUPLER</b>						
Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>			0.4	V	I <sub>C</sub> =0.25mA I <sub>F</sub> =20mA
On State Collector Current	I <sub>c(ON)</sub>	0.5			mA	V <sub>CE</sub> =5V I <sub>F</sub> =20mA

## TYPICAL ELECTRICAL / OPTICAL CHARACTERISTICS CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

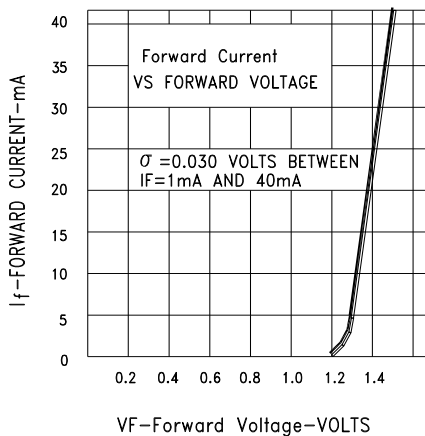


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

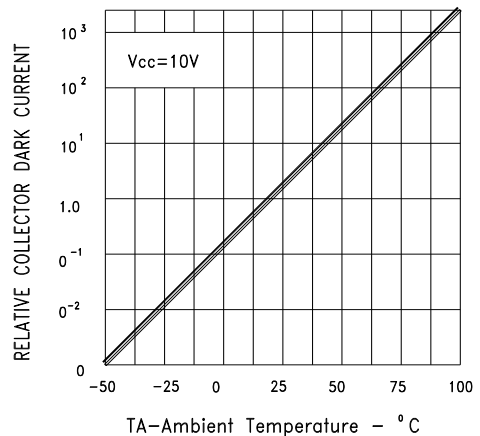


Fig.2 RELATIVE RADIANT INTENSITY VS. AMBIENT TEMPERATURE

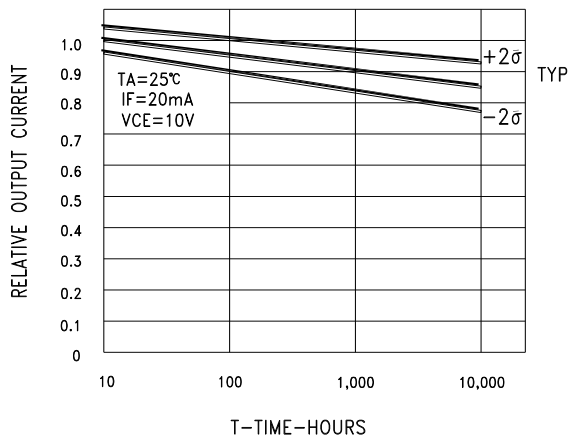


Fig.3 RELATIVE OUTPUT CURRENT VS TIME

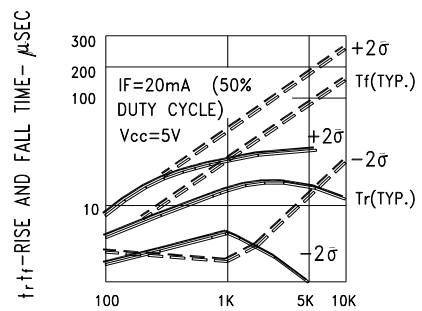


FIG.D RL.-LOAD RESISTANCE-OHMS

Fig.4 RISE AND FALL TIME VS LOAD RESISTANCE

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lite-On:](#)

[LTH-301A](#)