
SSF1122D

Feathers:

- Advanced trench process technology
- Ultra low Rdson
- High avalanche energy, 100% test
- Fully characterized avalanche voltage and current

ID =60A
BV=110V
Rdson=20mΩ（Typ.）




Description:

The SSF1122D is a new generation of middle voltage and high current N–Channel enhancement mode trench power MOSFET. This new technology increases the device reliability and electrical parameter repeatability. SSF1122D is assembled in high reliability and qualified assembly house.

Application:

- Power switching application



SSF1122D TOP View (DPAK)

Absolute Maximum Ratings

	Parameter	Max.	Units
I_D@T_c=25℃	Continuous drain current,VGS@10V	60	A
I_D@T_c=100℃	Continuous drain current,VGS@10V	50	
I_{DM}	Pulsed drain current ①	240	
P_D@T_C=25℃	Power dissipation	143	W
	Linear derating factor	2.0	W/℃
V_{GS}	Gate-to-Source voltage	±20	V
E_{AS}	Single pulse avalanche energy ②	240	mJ
E_{AR}	Repetitive avalanche energy	TBD	
T_J T_{STG}	Operating Junction and Storage Temperature Range	–55 to +175	℃

Thermal Resistance


	Parameter	Min.	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-case	—	1.05	—	℃/W
$R_{\theta JA}$	Junction-to-ambient	—	—	62	

Electrical Characteristics @TJ=25 ℃ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
BV_{DSS}	Drain-to-Source breakdown voltage	110	—	—	V	V_{GS}=0V,I_D=250μA
$R_{DS(on)}$	Static Drain-to-Source on-resistance	—	20	22	mΩ	V_{GS}=10V,I_D=30A
$V_{GS(th)}$	Gate threshold voltage	2.0	3.0	4.0	V	V_{DS}=V_{GS},I_D=250μA
g_{fs}	Forward transconductance	—	58	—	S	V_{DS}=5V,I_D=30A
I_{DSS}	Drain-to-Source leakage current	—	—	1	μA	V_{DS}=110V,V_{GS}=0V
		—	—	10		V_{DS}=110V, V_{GS}=0V,T_J=150℃

I_{GSS}	Gate-to-Source forward leakage	—	—	100	nA	V_{GS}=20V
	Gate-to-Source reverse leakage	—	—	-100		V_{GS}=-20V
Q_g	Total gate charge	—	90	—	nC	I_D=30A
Q_{gs}	Gate-to-Source charge	—	14	—		V_{DD}=30V
Q_{gd}	Gate-to-Drain("Miller") charge	—	24	—		V_{GS}=10V
$t_{d(on)}$	Turn-on delay time	—	18.2	—	nS	V_{DD}=30V
t_r	Rise time	—	15.6	—		I_D=2A ,R_L=15Ω
$t_{d(off)}$	Turn-Off delay time	—	70.5	—		R_G=2.5Ω
t_f	Fall time	—	13.8	—		V_{GS}=10V
C_{iss}	Input capacitance	—	3150	—	pF	V_{GS}=0V
C_{oss}	Output capacitance	—	300	—		V_{DS}=25V
C_{rss}	Reverse transfer capacitance	—	240	—		f=1.0MHZ

Source-Drain Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
I_S	Continuous Source Current (Body Diode)	—	—	60	A	MOSFET symbol showing the integral reverse p-n junction diode. 
I_{SM}	Pulsed Source Current (Body Diode) ①	—	—	240		
V_{SD}	Diode Forward Voltage	—	—	1.3	V	T_J=25℃,I_S=30A,V_{GS}=0V ③
t_{rr}	Reverse Recovery Time	—	57	—	nS	T_J=25℃,I_F=60A
Q_{rr}	Reverse Recovery Charge	—	107	—	nC	di/dt=100A/μs ③
t_{on}	Forward Turn-on Time	Intrinsic turn-on time is negligible (turn-on is dominated by Ls + LD)				


Notes:

① Repetitive rating; pulse width limited by max junction temperature.


② Test condition: L =0.3mH, ID = 40A, VDD = 50V


③ Pulse width≤300μS, duty cycle≤1.5% ; RG = 25Ω Starting TJ = 25°C

EAS test circuit

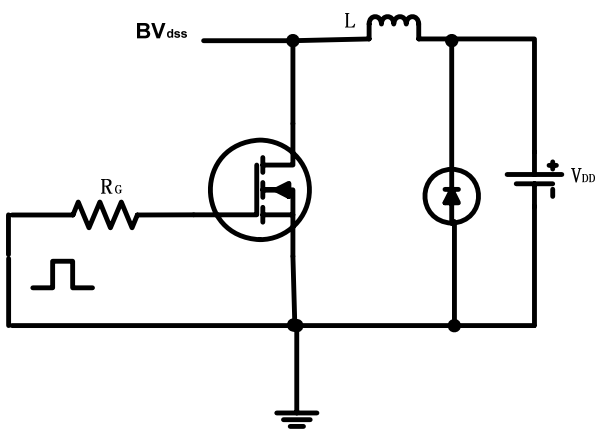


Gate charge test circuit

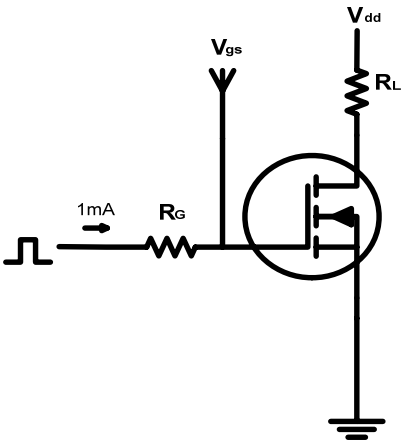


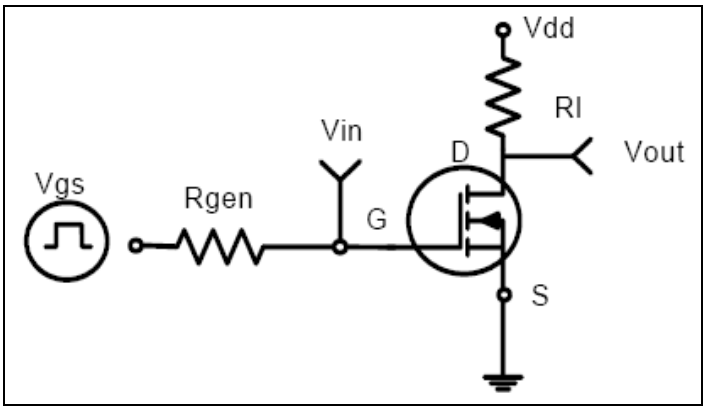


Switch Time Test Circuit：

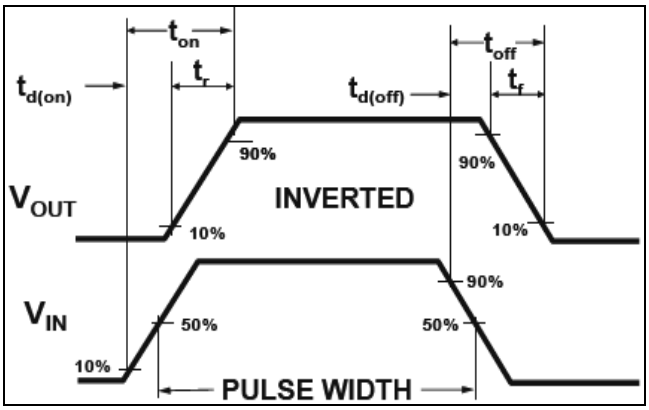


Switch Waveforms:

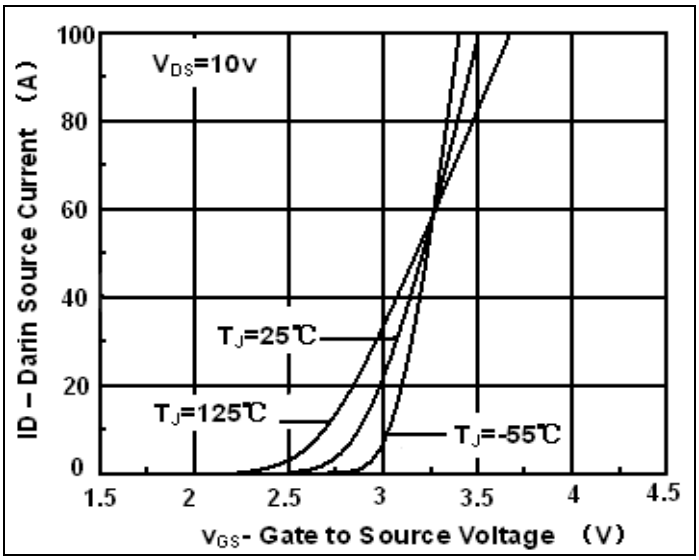


Transfer Characteristic

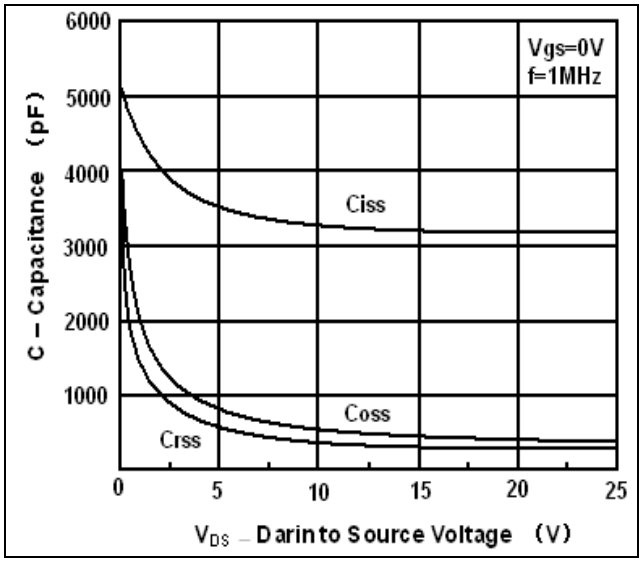


Capacitance:

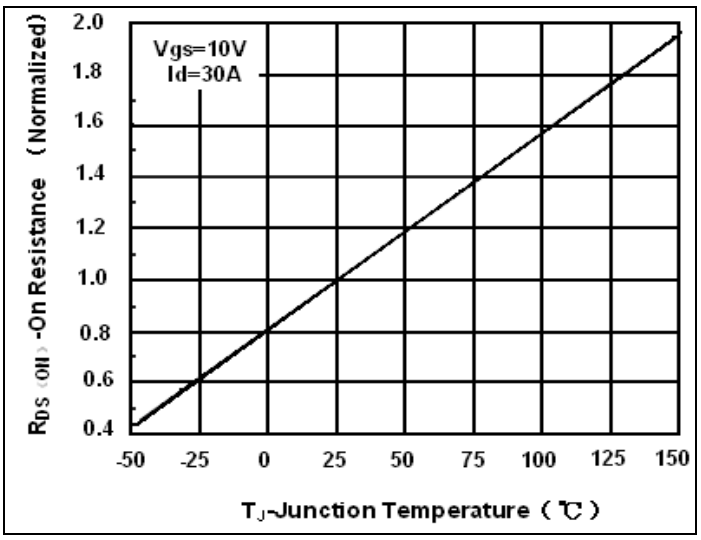


On Resistance vs. Junction Temperature

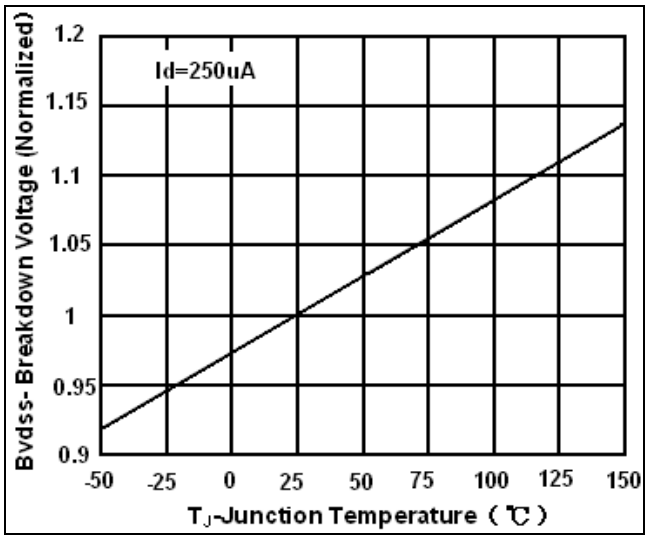


Breakdown Voltage vs. Junction Temperature

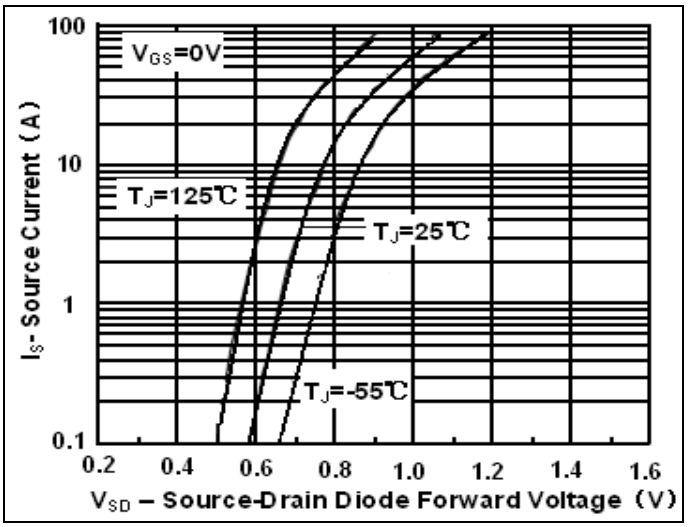


Source-Drain Diode Forward Voltage

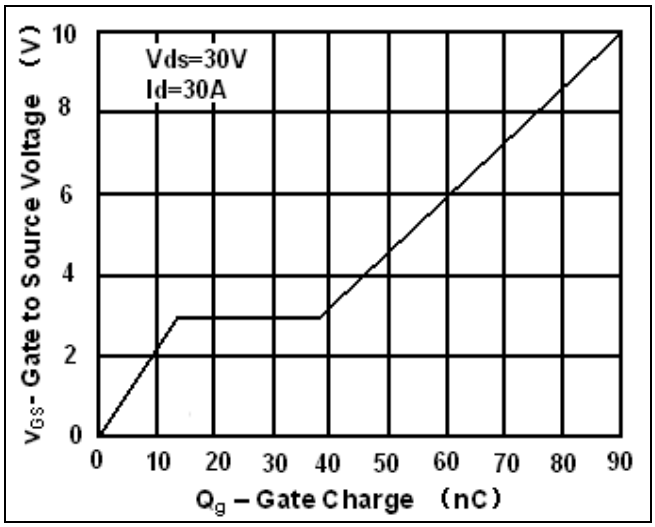


Gate Charge

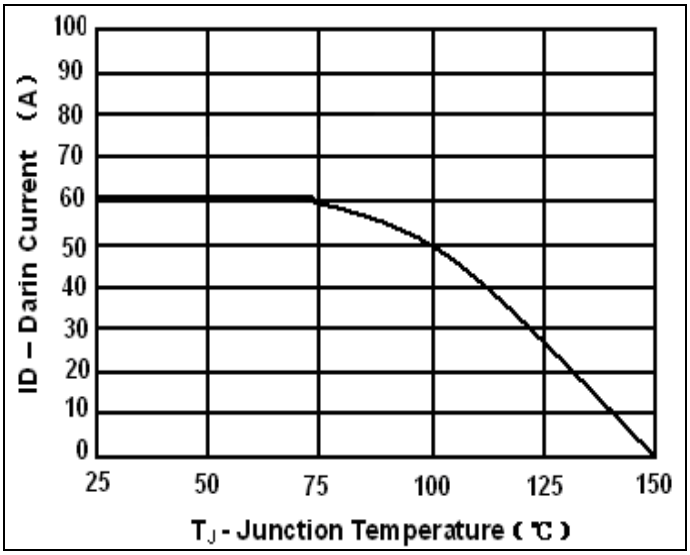

Max Drain Current vs. Junction Temperature

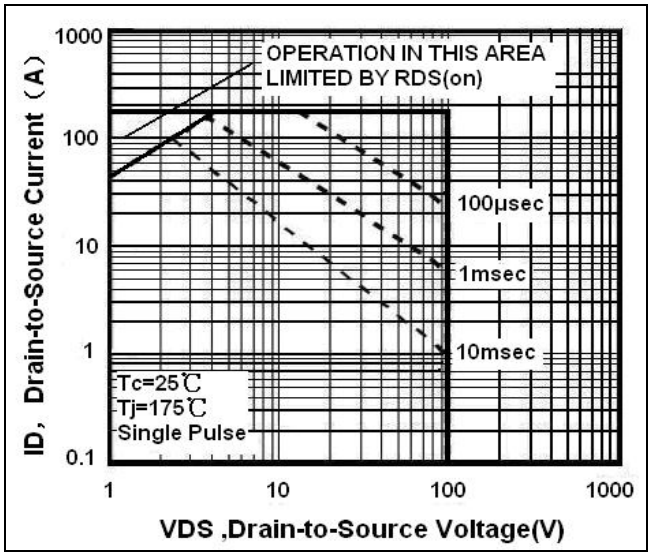


Safe Operation Area

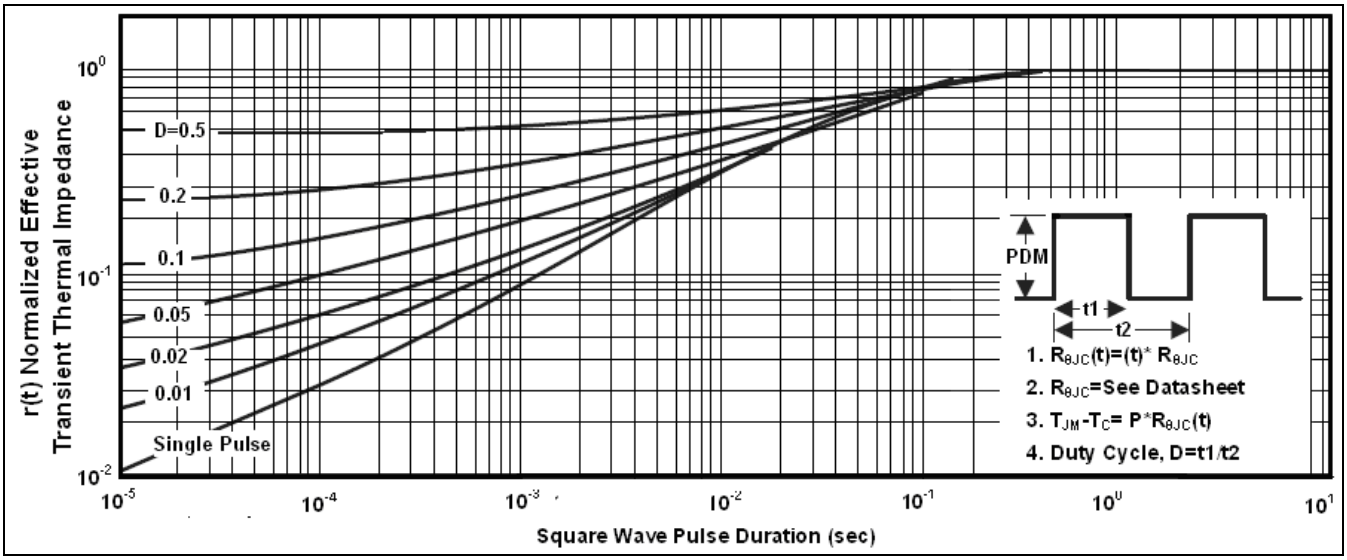

Transient Thermal Impedance Curve

DPAK MECHANICAL DATA:

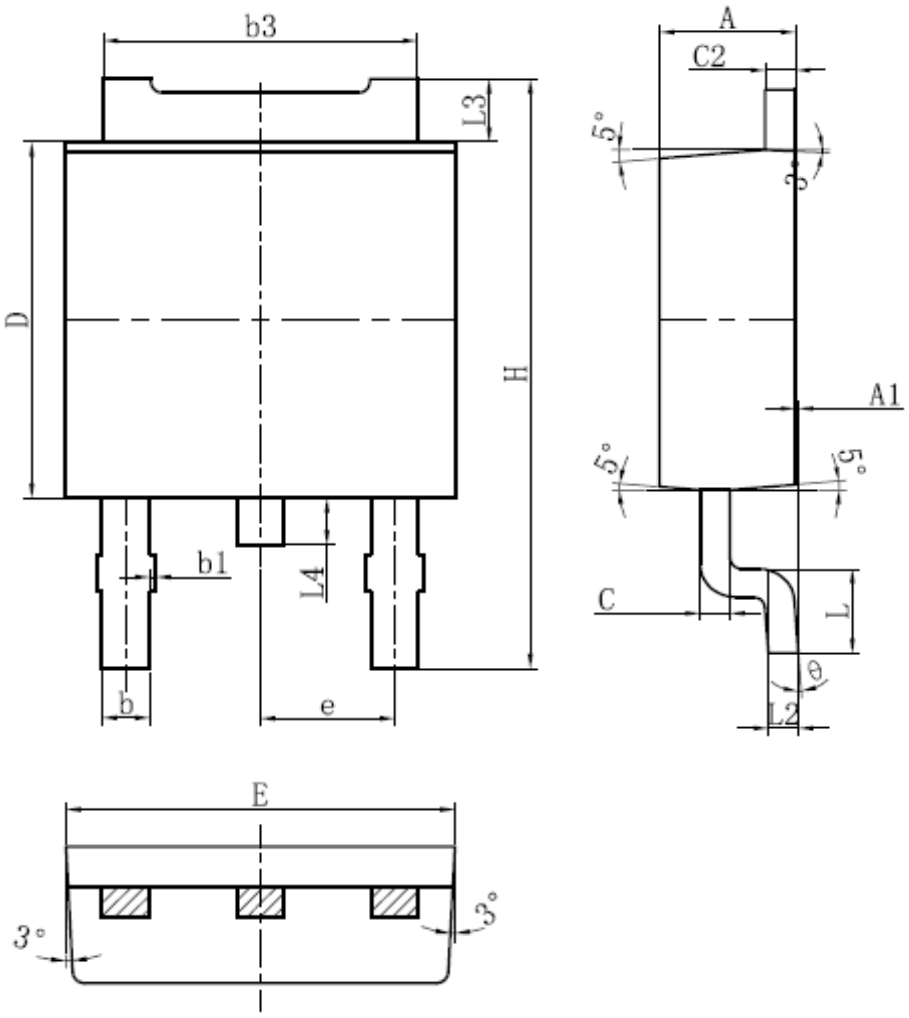

Symbol	Min.	Normal	Max.
E	6.55	6.6	6.65
L	1.40	1.5	1.60
L2	–	0.51BSC	–
L3	0.93	1.08	1.23
L4	0.7	0.8	0.9
D	6.05	6.1	6.15
H	9.9	10.1	10.3
b	0.763	0.813	0.863
b1	0	–	0.1
b3	5.28	5.33	5.38
e	2.23	2.28	2.33
A	2.25	2.3	2.35
A1	0	0.05	0.10
C	0.498	0.508	0.518
C2	0.498	0.508	0.518
θ	0	–	8°

NOTE:
1.Package body size exclude flash and gate burrs.
2.Dimension L is measured in gage plane.
3.Tolerance 0.10mm unless otherwise specified.
4.Controlling dimension is millimeter.Converted inch dimension are not necessarily exact.