
HAMMOND MANUFACTURING®

www.hammondmfg.com

185F10

Low Voltage Chassis Mounted Power Transformer

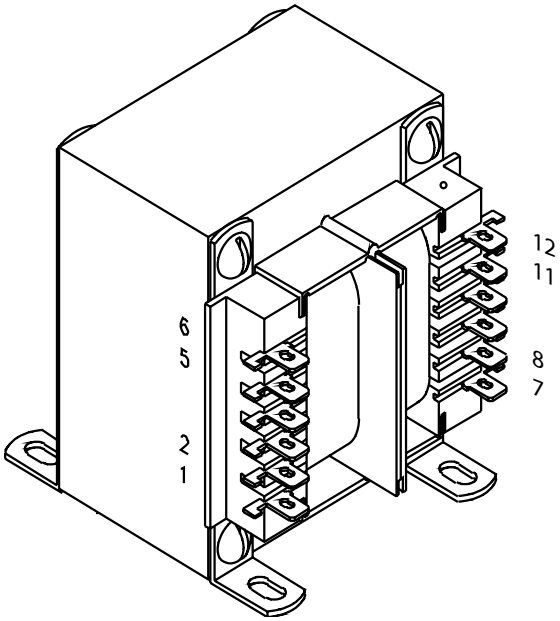


Key Features:

- **Universal operation on 50/60Hz, 115/ 230V dual primary for worldwide use.**
- **Dual bobbin construction**
- **Dual use terminals (solder lug or quick connect)**
- **Dual secondaries for series or parallel connections**
- **4,000V RMS Hipot tested**
- **Class F Insulation - 155 degrees C.**
- **Agency listings: cURus, CE, and TUV.**

Overall Dimensions - in. (mm)	
Width	**2.81 (71.4)**
Depth	**3.07 (78)**
Height	**3.37 (85.6)**
Weight	**4 lbs./ 1.8 kg.**
Hole to Hole Mounting Dims. - in. (mm)	
Width	**2.25 (57.2)**
Depth	**2.5 (63.5)**
Terminal Lug Data- in. (mm)	
Width	**0.25 (6.4)**
Thickness	**0.03 (0.8)**
Electrical	
Size (VA)	**130**
Primary	**115/ 230 VAC**
Sec (Series)	**10V C.T. @13.0A**
Sec (Parallel)	**5V@26.0A**

Primary Connections - 185 Series Transformers

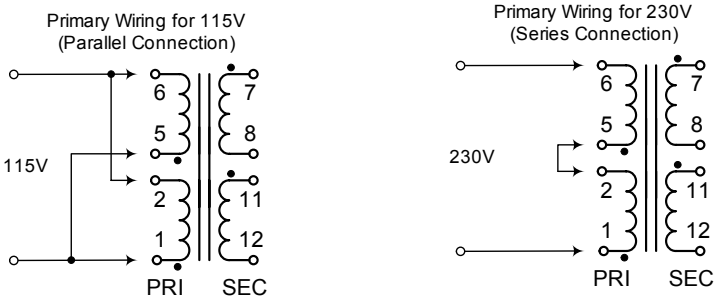

Secondary Connections - 185 Series Transformers

