

SHEET 1 OF 1

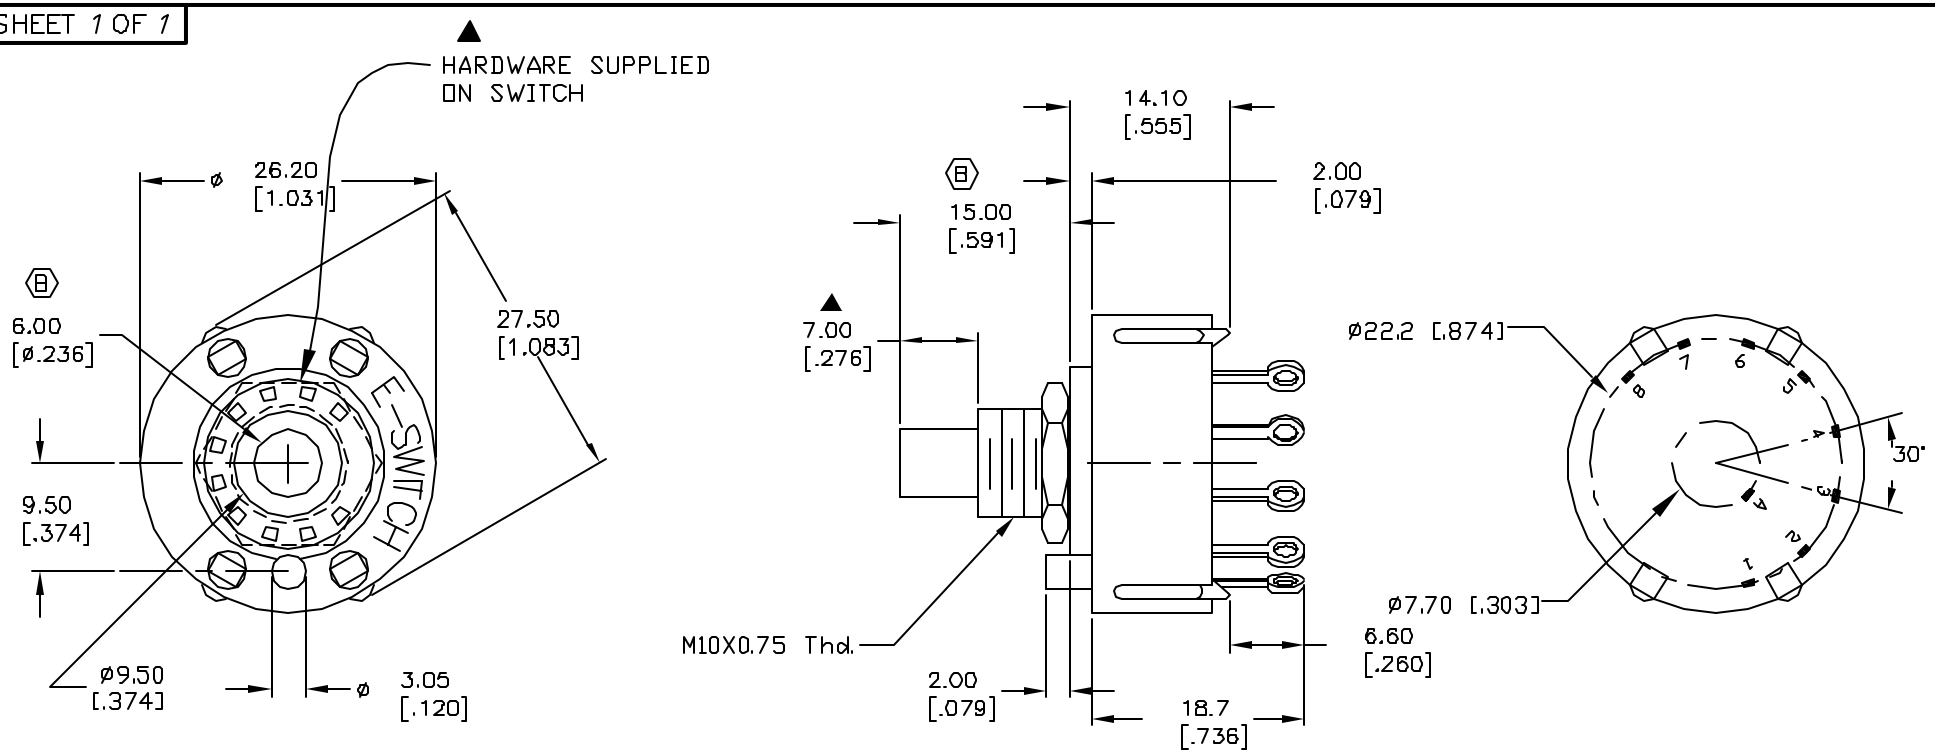


NOTES:

1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
   350mA, 110V AC/DC
5. CONTACT RATING (NON-SWITCHING) 5A
6. CONTACT MATERIAL: SILVER over COPPER ALLOY.
7. OPERATING FORCE: 425±100 CM/STANDARD
8. OPERATING TEMP: -30° to 85°C
9. ▲ CIRCUIT SP: 8 POSITIONS, 30° INDEX.
10. DIELECTRIC STRENGTH 1000V RMS min.@ SEA LEVEL
11. ▲ DENOTES CRITICAL PARAMETER.
12. HARDWARE SUPPLIED ON SWITCH- SEE BELOW
    STOPRING, LOCKWASHER & HEX NUT



CONTACT CONFIGURATION
Timing: Non-Shorting (BBM)

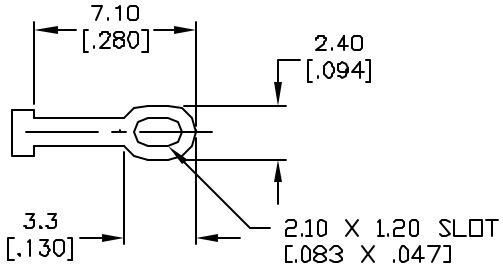

TERMINATION DETAIL
SCALE 2X

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	13312	6.00 WAS 6.35, 15.00 WAS 16.00	7/24/03	AR
A	13304	RELEASED FOR PRODUCTION	7/18/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: KC18B7.002NLS

SCALE	DATE	DR	DWG	REV
1.5:1	7/18/03	AR	G530171	B