180-071 (-3) Wall Mount Receptacle
Single Channel Fiber Optic Connector
Environmental Resistant
for Glenair 181-002 Rear Release Pin Termini

D38999 Series III


B

Single channel fiber optic square flange wall mount receptacle connector




How To Order

Product Series	Material/Finish (Table II)		Alternate Key Position 1, 2, 3, 4, & 5 (Table I)
180	- 071	- C	3	1
Basic No.			3 = Wall Mount Receptacle

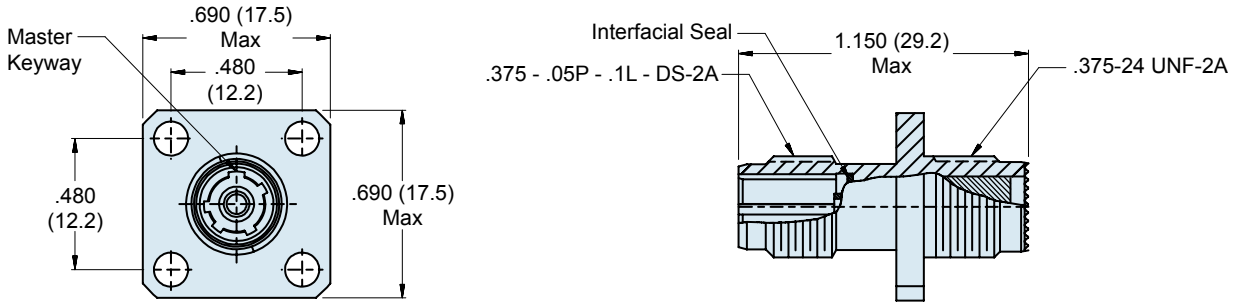

-3 Wall Mount Receptacle Assembly

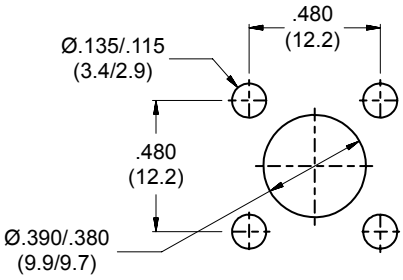

RECOMMENDED PANEL CUT WALL MOUNT RECEPTACLE


Material and Finish

Shell: See Table II.
Interfacial Seal, Rear Grommet: Fluorosilicone.
Retention Clip: Copper Alloy

Notes

Operating Temperature Range: -55°C to +125°C.
See Glenair drawing 181-002 for fiber optic pin terminus.

© 2012 Glenair, Inc.

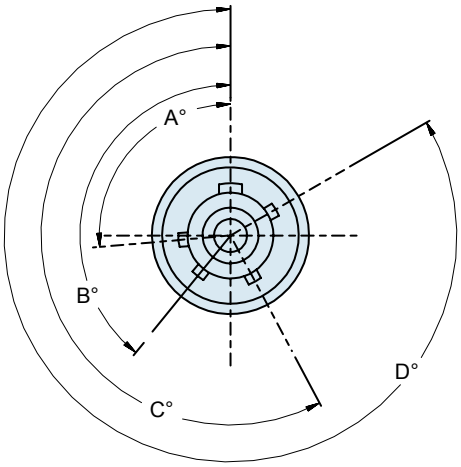

As Viewed from Front of Connector

Table I: Keyway Polarizations				
Pos	A°	B°	C°	D°
1	95	141	208	300
2	80	141	208	300
3	95	141	223	300
4	80	141	223	300
5	95	141	208	275

Table II: Material and Finish		
Code	Material	Finish
C	Aluminum Alloy	Anodize, Black
M		Electroless Nickel
NF		Cadmium, Olive Drab, over Electroless Nickel
ZN		Zinc-Nickel, Olive Drab, over Electroless Nickel
Z1	Stainless Steel	Passivate

Refer to Appendix for material/finish details

© 2012 Glenair, Inc.