AI-XL…

Ferrules With Extra Large Insulating Collar



CLIPLINE

Data Sheet
103092_00_en

© PHOENIX CONTACT - 09/2006

Description

Short-circuit-proof cables, e.g., type NSGFÖU, are usually crimped with ferrules without an insulating collar. The function of the insulating collar is then often performed by a piece of shrink tube.

This complicated process is simplified considerably by **AI-XL…** ferrules. These ferrules have an insulating collar with a diameter around twice the size as that of a ferrule according to DIN 46228-4.

Optimum connection is ensured when crimped with the appropriate tools from Phoenix Contact.

Make sure you always use the latest documentation.
It can be downloaded at www.download.phoenixcontact.com.


A conversion table is available on the Internet at
www.download.phoenixcontact.com/general/7000_en_00.pdf.

This data sheet is valid for all products listed on the following page:

Dimensions and Ordering Data

Ferrules With Extra Large Insulating Collar

Cross Section	l_1	l_2	d_1	s_1	d_2	s_2	Color	Type	Order No.	Pcs./Pck.
1.5 mm²	17.5 mm	8.0 mm	1.8 mm	0.15 mm	6.9 mm	0.3 mm	Black	AI-XL 1,5- 8 BK	3201916	100
1.5 mm²	19.5 mm	10.0 mm	1.8 mm	0.15 mm	6.9 mm	0.3 mm	Black	AI-XL 1,5-10 BK	3201974	100
2.5 mm²	17.5 mm	8.0 mm	2.3 mm	0.15 mm	7.8 mm	0.3 mm	Blue	AI-XL 2,5- 8 BU	3201929	100
2.5 mm²	21.5 mm	12.0 mm	2.3 mm	0.15 mm	7.8 mm	0.3 mm	Blue	AI-XL 2,5-12 BU	3201987	100
4 mm²	19.5 mm	10.0 mm	2.9 mm	0.2 mm	7.8 mm	0.3 mm	Gray	AI-XL 4 -10 GY	3201932	100
6 mm²	23.0 mm	12.0 mm	3.6 mm	0.2 mm	8.3 mm	0.4 mm	Yellow	AI-XL 6 -12 YE	3201945	100
10 mm²	24.0 mm	12.0 mm	4.6 mm	0.2 mm	9.8 mm	0.4 mm	Red	AI-XL 10 -12 RD	3201958	100
16 mm²	25.5 mm	12.0 mm	6.0 mm	0.2 mm	12.0 mm	0.4 mm	Blue	AI-XL 16 -12 BU	3201961	100

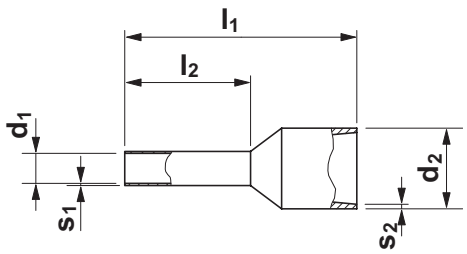

l_1 = Total length
l_2 = Sleeve length
d_1 = Inside diameter of sleeve
s_1 = Wall thickness of sleeve
d_2 = Inside diameter of insulating collar
s_2 = Wall thickness of insulating collar

Figure 1 Dimensions (tolerances according to DIN 46228-4)

Technical Data

General Data	
Material	
Collar	Polypropylene PP (UL94 HB), heat resistant up to 105°C
Sleeve	E-CU, tin-plated surface

© PHOENIX CONTACT 09/2006

PHOENIX CONTACT GmbH & Co. KG • 32823 Blomberg • Germany
Phone: +49 - 52 35 - 30 0 • Fax: +49 - 52 35 - 34 12 00
www.phoenixcontact.com