

HSF

NOTES:

Current Rating: 2.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulation Resistance: 1000M Ω Min

Operation Temperature: -40℃ to +105℃(SN)
-40℃ to +125℃(AU)

Contact Material: Phosphor Bronze

Contact plating: Au Or Sn over Ni

Insulator Material: LCP+30%GF UL94V-0

Ordering Information

2263 - 2 XX S XX D Y N T 5

No.of Pins per
ROW:02~40PIN

Contact Plating:
 G0=Gold Flash
 G3=10 μ "Gold
 G4=15 μ "Gold
 G5=30 μ "Gold
 S0=Gold Flash/Tin
 S3=10 μ "Gold/Tin
 S4=15 μ "Gold/Tin
 S5=30 μ "Gold/Tin
 SN=Tin
 SM=Matte Tin


Insulator:

Packing:

Item	Pitch	DIM A	Mating
Standard	2.00	2.2	1215/1220
Alternate			

				OPERATION		DRAW Surong xu	DATE 2019/05/10	SCALE	FIT	PART NO. 2263-2XXSXXDYNT5
				x.x	±0.40			UNIT	mm	
				x.xx	±0.25	CHECK	DATE	SIZE	A4	
				x.xxx	±0.15			APPROVE	DATE	SHEET
A0	2019/05/10	NEW	-----	Angle	± 3°					PROJ.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL					

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

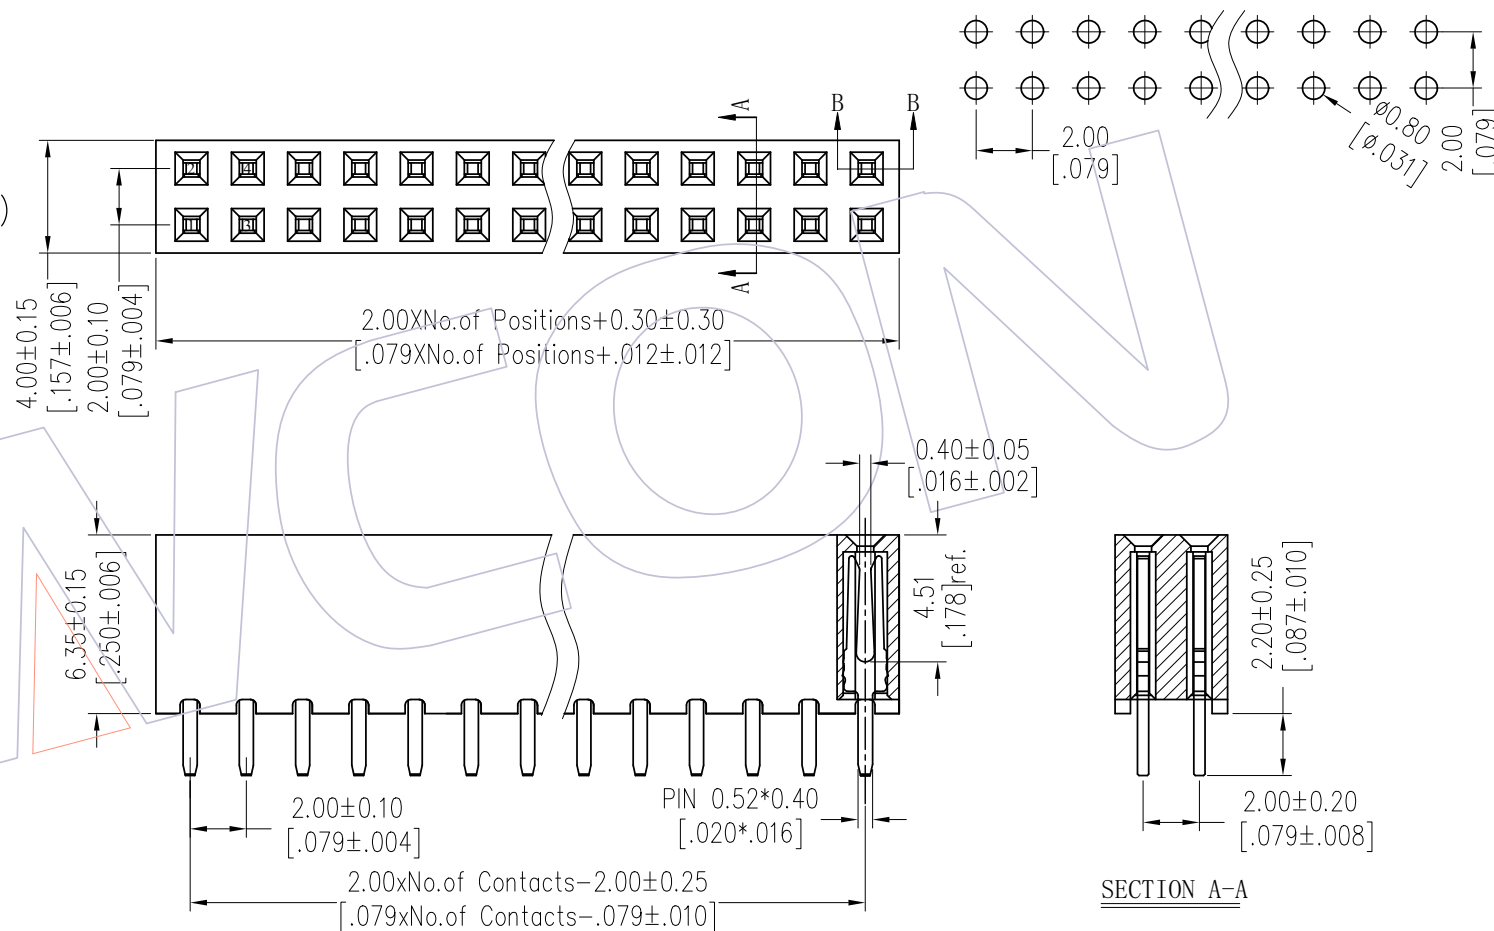

SECTION A-A

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com