


P. C. B RECOMMENDED HOLE LAYOUT SEEN FROM COMPONENT SIDE.
ALL CENTERLINE DIMENSIONS ARE BASIC



机械规格:

1. 连接器材质:
塑壳:PA46 插芯:PA46
金针/包壳:铜合金
包壳电镀:镍
金针电镀:镀金, 厚度按客户要求
2. 产品结构符合F. C. C尺寸要求
3. 波峰焊接温度为265度/5秒
4. 所有公差没有另外说明否则均为±0.25mm.

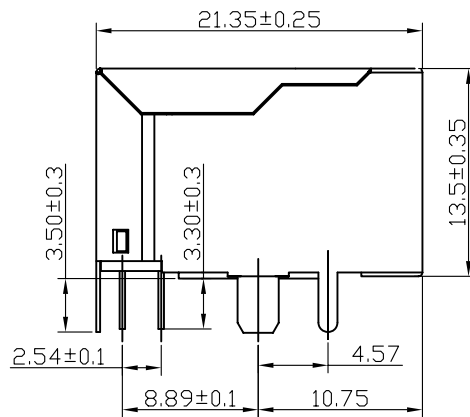

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 双RJ45并排插座
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW09-RJ45-254B
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY:	DATE : 2014-02-23	DRAW NO: HYC-RJ13256320
			SHEET NO. 1 OF 1