



1. Dimensions:

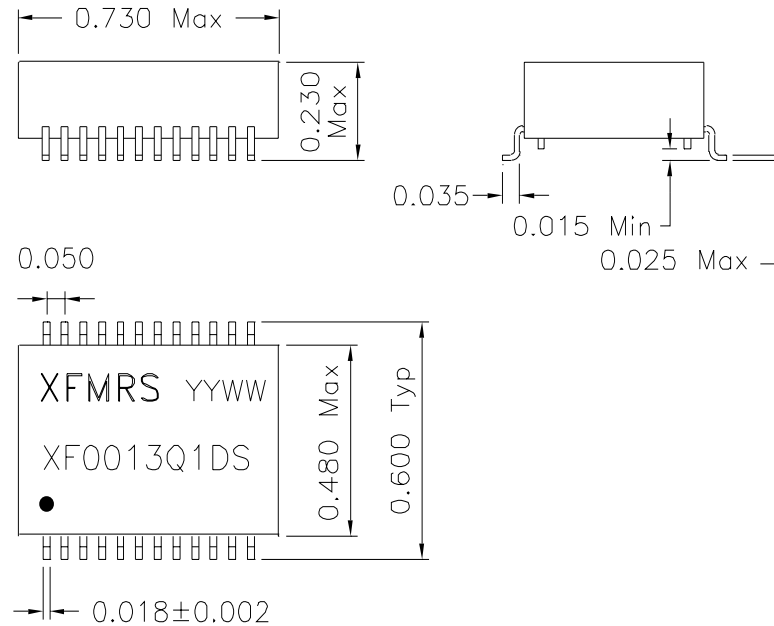

2. Schematic:

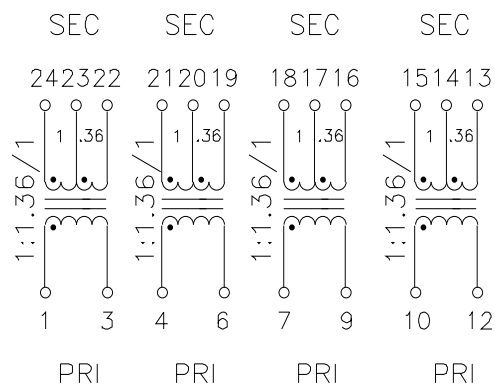

3. Electrical Specifications: @25°C

Isolation: 1500 Vrms (PRI to SEC)

Turns Ratio: 1:1.36/1±2% (PRI:SEC)

PRI OCL: 1.20mH Minimum @100KHz 50mV

Cw/w: 30pF Maximum @100KHz 50mV (PRI/SEC)

PRI LL: 0.4uH Maximum @100KHz 50mV
(SEC Shorted)

PRI DC Res.: 0.7 Ohms Max

SEC DC Res.: 1.0 Ohms Max

DOC. REV: A/1

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION

XFMRS Inc		Title: T1/E1/CEPT QUAD PORT	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF0013Q1DS		REV. A
	DWN.	李清儿	Mar-10-00
	CHK.	孙悦	Mar-10-00
	APP.	Joe Huff	Mar-10-00

SHEET 1 OF 1