
Type: S-7LDJ

◆ Product Description




- 8.1×7.8mm Max.(L×W), 7.1mm Max. Height.
- Inductance:0.1~4.0 μH Max.
- Operating frequency:300MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.

◆ Feature


- Variable shielded type.
- RoHS Compliance

◆ Dimensions (mm)

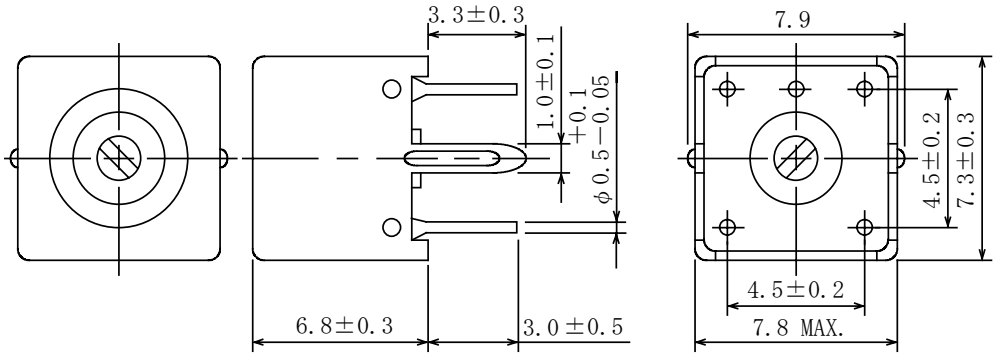

＊ Dimension does not include solder used on coil.
＊ Pin pitch should be measured at the root of terminal.

◆ Connection (Bottom View)



"S" is winding start.

◆ Specification(Part No.S0975791)

Item	(1-3)	Measuring Condition
Inductance	0.35μH±4% Variable	25.2MHz
Unloaded Qu	45 Min.	25.2MHz