



S & SL Series

Surface Mount Wirewound Resistors



- Resistance: 0.005 to 50kOhms
- High Power: to 4 Watts
- Tolerance to $\pm 0.05\%$
- High Temperature Rating up to 275°C
- Low Temperature Coefficient to $\pm 20\text{ppm}/^\circ\text{C}$
- Superior Surge Handling Capability
- Non-Inductive Windings are Available (Type SN)
- Flame Resistant UL 94V-0

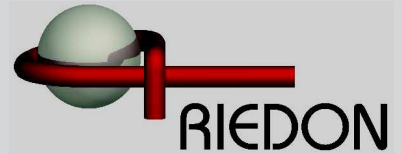


SPECIFICATIONS

| Type | Power Rating Watts @ 70°C | Resistance Range (Ω) | Non-Inductive Winding Resistance Range (Ω) ¹ | Maximum Working Voltage |
|------|------------------------------|----------------------------------|---|----------------------------|
| S-1 | 0.5 | 0.01 to 400 | 0.1 to 200 | $\sqrt{P * R}$ |
| S-2 | 1 | 0.005 to 3k | 0.1 to 1.5K | |
| S-4 | 2 | 0.01 to 15k | 0.1 to 7.5K | |
| S-3 | 3 | 0.01 to 25k | 0.1 to 12.5K | |
| S-5 | 4 | 0.01 to 50k | 0.1 to 25K | |
| SL-2 | 1 | 0.005 to 0.05 | N/A | |
| SL-4 | 2 | 0.005 to 0.07 | N/A | |

¹ Below 0.1 Ω the inductance of a single winding, or the metal element (SL) is negligible


| Specification | Value |
|-------------------------|---|
| Tolerances | S: Above 100 Ω , $\pm 0.05\%$ to $\pm 5\%$ S: Above 1 Ω , $\pm 0.1\%$ to $\pm 5\%$ S: Below 1 Ω , $\pm 1\%$ to $\pm 5\%$ SL: $\pm 1\%$ to $\pm 5\%$ |
| Temperature Coefficient | S: >10 Ω : $\pm 20\text{ppm}/^\circ\text{C}$ S: 1 Ω to 10 Ω : $\pm 50\text{ppm}/^\circ\text{C}$ S: <1 Ω : Call Factory SL: $\pm 200\text{ppm}/^\circ\text{C}$, For Lower Call Factory |
| Temperature Range | -55°C to +275°C |
| Dielectric Strength | S: 1000 VAC SL: 500 VAC |
| Insulation Resistance | >1000 MOhms / Dry |
| Terminal Finish | 100% Electroless Tin over Copper |
| Reel / Tape Width (mm) | S-1: 12 / S-2: 16 / S-3: 24 / S-4: 24 / S-5: 32 / SL-2: 16 / SL-4: 24 |

| Environmental Performance (MIL-STD 202) | ΔR MAX |
|--|--------------------------|
| Dielectric | $\pm 0.5\% + 0.05\Omega$ |
| Load Life | $\pm 1\% + 0.05\Omega$ |
| Storage | $\pm 0.5\% + 0.05\Omega$ |
| Moisture Resistance | $\pm 1\% + 0.05\Omega$ |
| Thermal Shock | $\pm 0.5\% + 0.05\Omega$ |
| 5X Overload (5s) | $\pm 0.5\% + 0.05\Omega$ |
| Shock | $\pm 0.5\% + 0.05\Omega$ |
| Solder Heat Resistance (260C, 10s) | $\pm 0.5\% + 0.05\Omega$ |

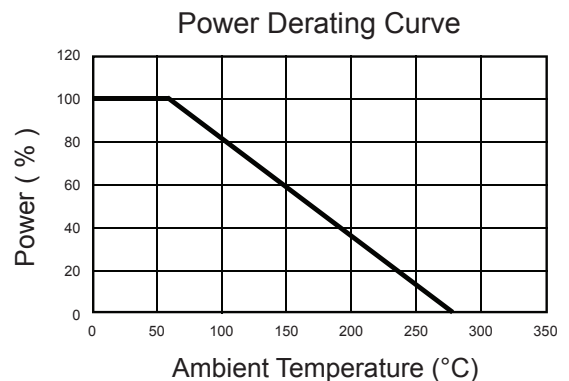


S & SL Series

Surface Mount Wirewound Resistors

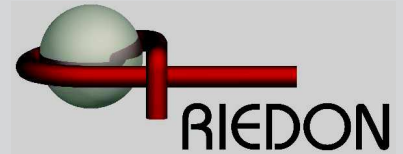

SPECIFICATIONS (continued)

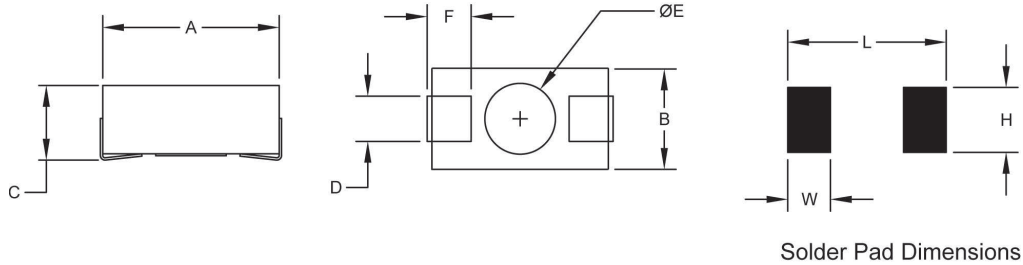

| Type | Dimensions | | | | | | Stand-Off | | Footprint | | |
|------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---|--------------------------|--------------------------------|--------------------------|--------------------------|--------------------------|
| | A ±0.015" [±0.4mm] | B ±0.015" [±0.4mm] | C ±0.015" [±0.4mm] | D ±0.015" [±0.4mm] | F ±0.015" [±0.4mm] | Lead Thick- ness ±0.002" [±0.05mm] | E ±0.015" [±0.4mm] | Height ±0.005" [±0.13mm] | W ±0.015" [±0.4mm] | H ±0.015" [±0.4mm] | L ±0.015" [±0.4mm] |
| S-1 | 0.190 [4.8] | 0.130 [3.3] | 0.110 [2.8] | 0.060 [1.5] | 0.040 [1.0] | 0.006 [0.15] | 0.100 [2.5] | 0.005 [0.13] | 0.062 [1.6] | 0.100 [2.5] | 0.250 [6.4] |
| S-2 | 0.260 [6.6] | 0.155 [3.9] | 0.125 [3.2] | 0.070 [1.8] | 0.070 [1.8] | 0.006 [0.15] | 0.120 [3.0] | 0.005 [0.13] | 0.096 [2.4] | 0.150 [3.8] | 0.337 [8.6] |
| S-4 | 0.450 [11.4] | 0.250 [6.4] | 0.180 [4.6] | 0.120 [3.0] | 0.100 [2.5] | 0.006 [0.15] | 0.190 [4.8] | 0.005 [0.13] | 0.150 [3.8] | 0.200 [5.1] | 0.540 [13.7] |
| S-3 | 0.625 [15.9] | 0.270 [6.9] | 0.250 [6.4] | 0.120 [3.0] | 0.135 [3.4] | 0.006 [0.15] | 0.150 [3.8] | 0.005 [0.13] | 0.200 [5.1] | 0.220 [5.6] | 0.700 [17.8] |
| S-5 | 0.820 [20.8] | 0.295 [7.5] | 0.305 [7.7] | 0.150 [3.8] | 0.190 [4.8] | 0.006 [0.15] | 0.245 [6.2] | 0.005 [0.13] | 0.220 [5.6] | 0.250 [6.4] | 0.900 [22.9] |
| SL-2 | 0.260 [6.6] | 0.155 [3.9] | 0.100 [2.5] | 0.070 [1.8] | 0.070 [1.8] | 0.006 [0.15] | 0.120 [3.0] | 0.005 [0.13] | 0.096 [2.4] | 0.150 [3.8] | 0.337 [8.6] |
| SL-4 | 0.450 [11.4] | 0.250 [6.4] | 0.100 [2.5] | 0.120 [3.0] | 0.100 [2.5] | 0.006 [0.15] | 0.190 [4.8] | 0.005 [0.13] | 0.150 [3.8] | 0.200 [5.1] | 0.540 [13.7] |

| Standard Package Quantities | | | | | | | |
|-----------------------------|------|------|------|-----|-----|------|------|
| | S-1 | S-2 | S-4 | S-3 | S-5 | SL-2 | SL-4 |
| Small Reel | 650 | 600 | 250 | 125 | 180 | 600 | 250 |
| Large Reel | 3000 | 2000 | 1000 | 500 | 500 | 2000 | 1000 |

Surface Mount Humidity Packaging:

All Riedon Surface Mount wirewound resistors have a Moisture Sensitivity Level (MSL) rating of 2 (1-year floor life). Surface Mount parts are packaged in a Moisture Barrier Bag (MBB) with a Humidity Indicator Card and desiccant to monitor and protect the parts from humidity. The MBB is marked with a Moisture-Sensitive Identification Label.

Ordering Information

Part Description:

Part Type Resistance Tolerance TCR (if not standard)

Example: S-4 100 OHM 1%

For non-inductive windings (Resistance > 0.1Ω) insert the letter "N" (i.e. SN-4)