
Data Sheet


4.0 Amp SINGLE PHASE SILICON BRIDGE

KBL400 . . . 410 Series

Description



Mechanical Dimensions



Mechanical Data: Mounting Position - Any.
Weight - 0.3 Ounce.


Features

- **COMPACT SIZE**
- **LOW LEAKAGE CURRENT**
- **200 AMP SURGE OVERLOAD RATING**
- **MEETS UL SPECIFICATION 94V-0**


Electrical Characteristics @ 25°C.	***KBL400 . . . 410 Series***							**Units**
Maximum Ratings	**KBL400**	**KBL401**	**KBL402**	**KBL404**	**KBL406**	**KBL408**	**KBL410**	
Peak Repetitive Reverse Voltage...V_{RRM}	50	100	200	400	600	800	1000	Volts
RMS Reverse Voltage...$V_{R(rms)}$	35	70	140	280	420	560	700	Volts
DC Blocking Voltage...V_{DC}	50	100	200	400	600	800	1000	Volts
Average Forward Rectified Current...$I_{F(av)}$ T_A = 25°C	..... 4.0							Amps
Non-Repetitive Peak Forward Surge Current...I_{FSM} 8.3 mS Single ½ Sine Wave Imposed on Rated Load	..... 200							Amps
Forward Voltage...V_F Bridge Element @ 4.0 Amps	..... 1.1							Volts
DC Reverse Current...I_R @ Rated DC Blocking Voltage T_A = 25°C	..... 10							µAmps
T_A =100°C	..... 5.0							mAmps
Typical Thermal Resistance...$R_{\theta JC}$	..... 10							°C/W
Operating & Storage Temperature Range...T_J, T_{STRG}	..... -55 to 150							°C

4.0 Amp SINGLE PHASE SILICON BRIDGE


Forward Current Derating Curve

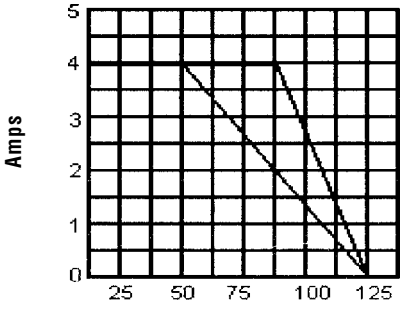


Non-Repetitive Peak Forward Surge Current

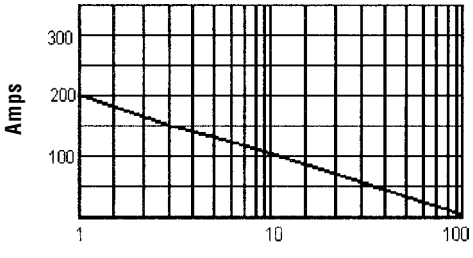


Typical Instantaneous Forward Characteristics

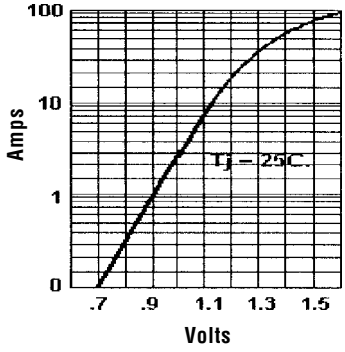


Typical Reverse Characteristics

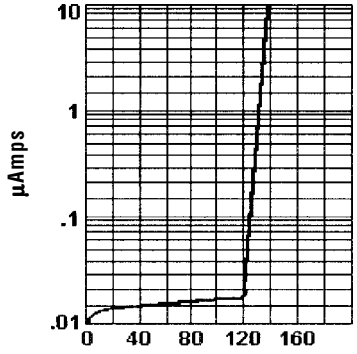

Typical Junction Capacitance

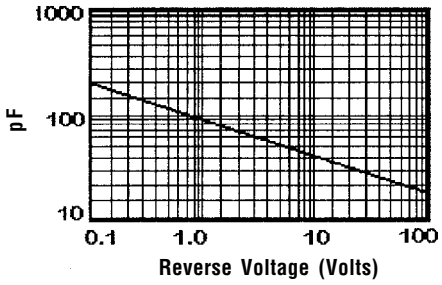

Electrical Description

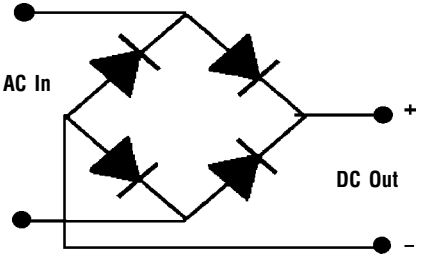

Ratings at 25 Deg. C ambient temperature unless otherwise specified.

Single Phase Half Wave, 60 HZ Resistive or Inductive Load.

For Capacitive Load, Derate Current by 20%.