


MATERIALS

BODY	BRASS NICKEL PLATED
CONTACT	SILVER PLATED
INSULATOR	PTFE

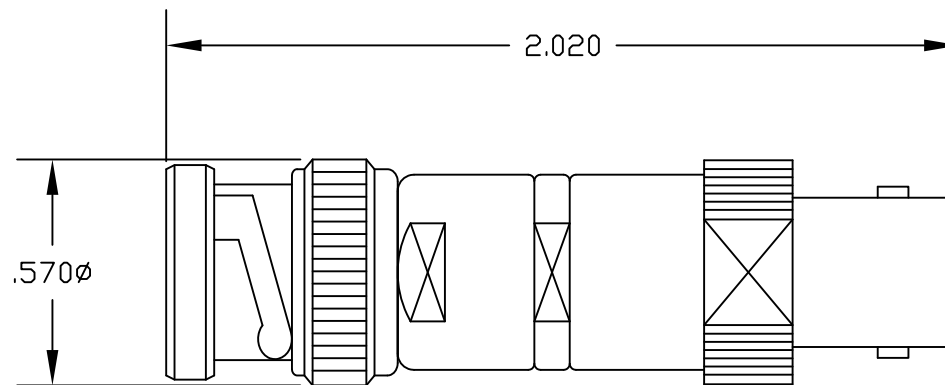

SPECIFICATIONS

BNC MALE INPUT / BNC FEMALE OUTPUT	
NOMINAL IMPEDANCE	75 OHMS
FREQUENCY RANGE	100 kHz-1,000 MHz
DC OUTPUT POLARITY	POSITIVE
TANGENTIAL SENSITIVITY (TSS) (MEASURED WITH A 2 MHz VIDEO BANDWIDTH & 2 dB NF AMPLIFIER)	-20 dBm MINIMUM
FLATNESS	±0.20 dB MAXIMUM
MAXIMUM RF INPUT POWER	+20 dBm
VSWR	1.20:1 MAXIMUM
VIDEO CAPACITANCE	1000 pF



PASTERNACK ENTERPRISES, INC.

P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

DWG TITLE

PE8000-75

DES. 75 OHM BNC MALE TO 75 OHM BNC FEMALE
DETECTOR, FREQUENCY RANGE: 100
KHz-1,000 MHz

REV. B

FSCM NO. 53919

CAD FILE 011210

SCALE N/A

SIZE A

147

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.