


CONTACT CONFIGURATION
TIMING (BBM) NON-SHORTING







Ø26.00
[1.024 in]

27.50
[1.083 in]

HARDWARE SUPPLIED
ON SWITCH

3/8-32 UNEF-2A
THREADS

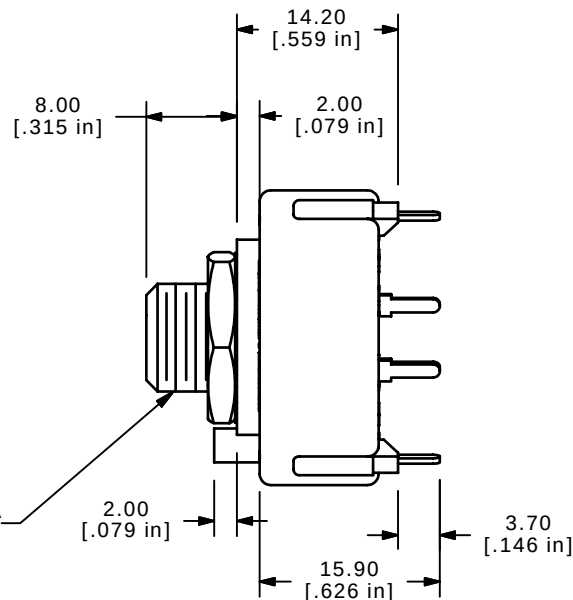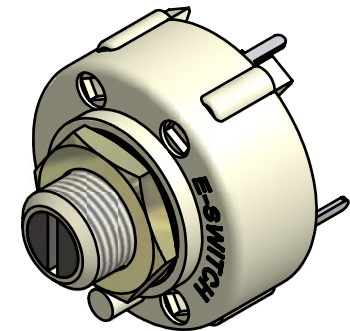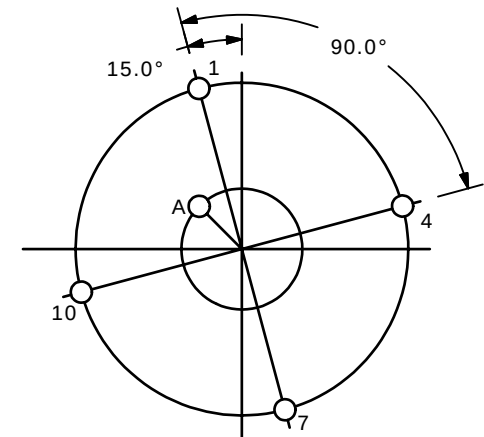

P.C.B. LAYOUT

NOTE:

1. ALL DIMENSIONS IN MM[INCH].
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT MATERIAL: SILVER
5. CONTACT RATING: 0.3A @ 125 VAC
6. OPERATING FORCE 500±200 GRAMS
7. OPERATING TEMP: -30°C TO 85°C
- ▲8. CIRCUIT DP: 4 POSITION 90° INDEX.
9. DIELECTRIC STRENGTH: 500VAC FOR 1 MIN.
- ▲10. HARDWARE SUPPLIED ON SWITCH:
LOCKWASHER, HEXNUT, STOP RING
11. ▲DENOTES CRITICAL PARAMETER.

E-SWITCH®

C	15367	ADD PCB LAYOUT	10/6/05	PH
B	15349	REVISED AND REDRAWN	9/29/05	PH
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE KC58D01NPS

SCALE 1.5:1

DATE 7/19/2005

DR DM

DWG G511004

REV C