

**SCHOTTKY BARRIER RECTIFIERS**


REVERSE VOLTAGE - **20 to 200** Volts
 FORWARD CURRENT - **3.0** Amperes

FEATURES

- Metal-Semiconductor junction with guard ring
- Epitaxial construction
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0
- For use in low voltage,high frequency inverters,free wheeling,and polarity protection applications

MECHANICAL DATA

- Case : JEDEC SMA molded plastic
- Polarity : Color band denotes cathode
- Weight : 0.231 grams
- Mounting position : Any

SMC

SMC		
DIM.	MIN.	MAX.
A	6.60	7.11
B	5.59	6.22
C	2.75	3.15
D	0.15	0.31
E	7.75	8.13
F	0.05	0.20
G	2.00	2.62
H	0.76	1.52
All Dimensions in millimeter		

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

PARAMETER	SYMBOL	B320	B330	B340	B350	B360	B380	B3100	B3150	B3200	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	V
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	V
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	150	200	V
Maximum average forward redified current	I _F	3.0									A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	80.0									A
Maximum Instantaneous Forward Voltage @ 3.0A	V _F	0.50			0.70		0.85		0.87	0.90	V
Maximum DC Reverse Current @ TA=25 °C at Rated DC Blocking Voltage @ TA=100 °C	I _R	0.5					0.2				mA
		10.0					5.0				
Typical Junction Capacitance	C _J	180			150		110		100		pF
Typical Thermal Resistance	R _{θJA}	70									°C/W
Operating Temperature Range	T _J	-55 to +125									°C
Storage Temperature Range	T _{STG}	-55 to +150									°C

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

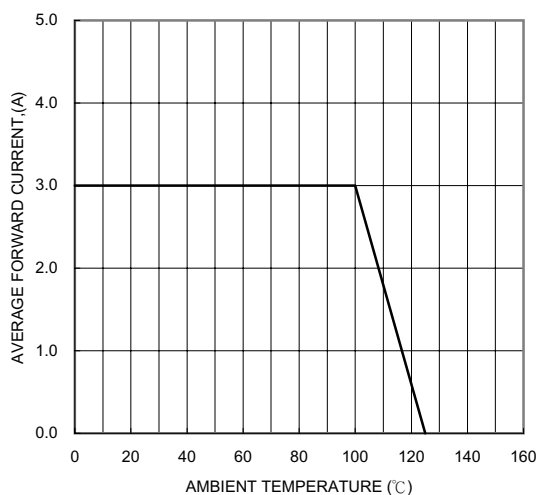


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

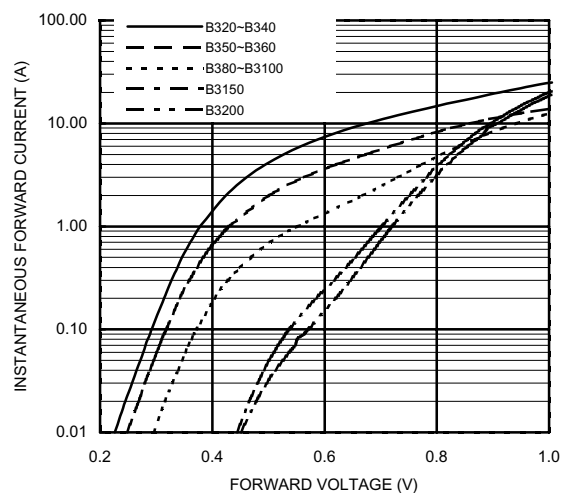


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

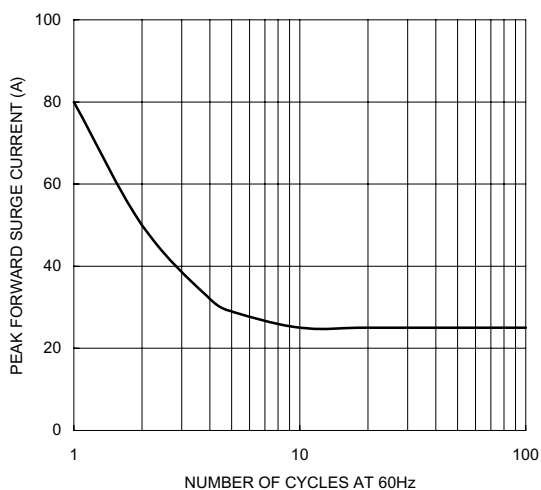


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

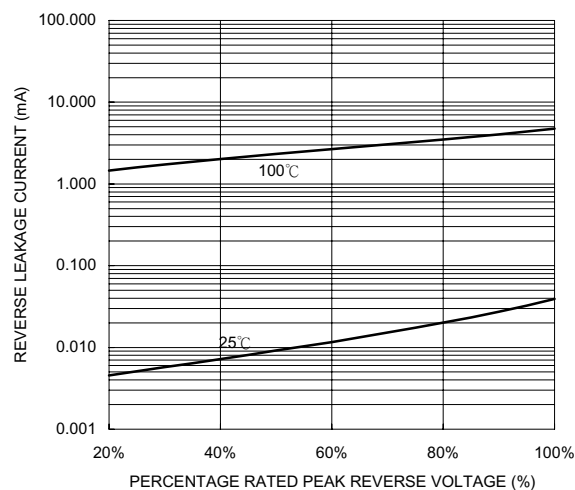


FIG. 5-TYPICAL JUNCTION CAPACITANCE

