环保物料

TEL:0769-82001899





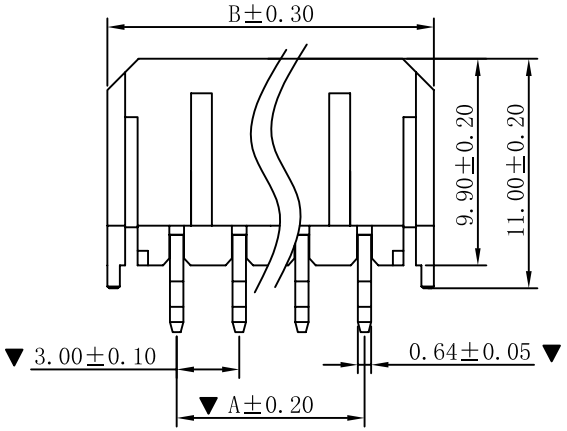



SPECIFICATIONS

1.Voltage rating: 250V AC, DC
2.Current rating: 5A, AC, DC
3.Withstanding Voltage: 1500V AC/minute
4.Insulation resistance:1000MΩ min
5.Temperature range: -25°C-+85°C
6.Contact resistance: 10mΩ max

WAFER
Housing Material: Nylon66 UL 94V0
Pin Material: Phosphor Bronze or Brass
Contact Area Plating: Plated Tin or Plated Gold
Mates with :P3025-1xXX series Housing
Poles:02-12P
Part No.: M3025V-1xXX-BK
└Pin位数

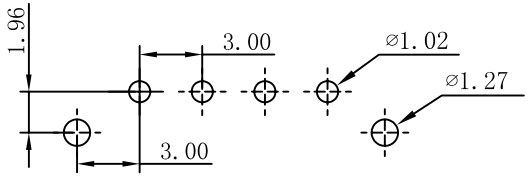

P. C. B. LAYOUT

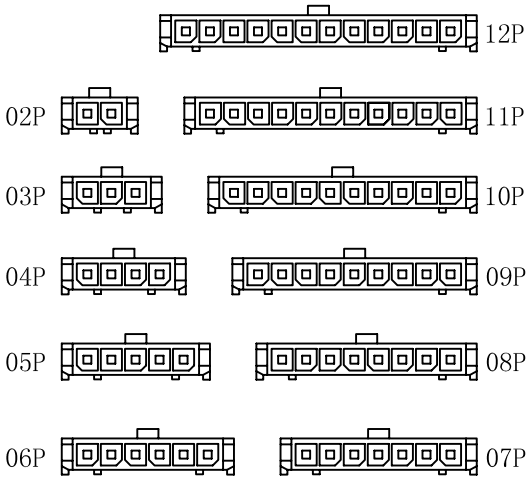

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm) A	Dimensions (mm) B
02	3.00	9.65
03	6.00	12.65
04	9.00	15.65
05	12.00	18.65
06	15.00	21.65
07	18.00	24.65
08	21.00	27.65
09	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

VER	MODIFICATION	DRAW	DATE
A0			

TOLERANCE UNLESS OTHERWISE
X. ±0.30 X° ±5°
.X ±0.20 .X° ±2°
.XX ±0.08 .XX° ±1°
.XXX ±0.03 .XXX° ±0.5°

DRAWN	CK tan
CHKD	
APPD	
VIEW	

XFCN 兴飞连接器有限公司
XFCN CONNECTORS CO.,LTD.

PRODUCT NAME	3.00mm Crimp Style Connectors
PART. NO.	M3025V-1xXX-BK

SHEEI	1/1
DATE	2020.04.12
UNITS	mm
SCALE	1:1
DWG NO.	009