



SUPER FAST RECTIFIERS

VOLTAGE RANGE: 50 --- 600 V
CURRENT: 1.0 A

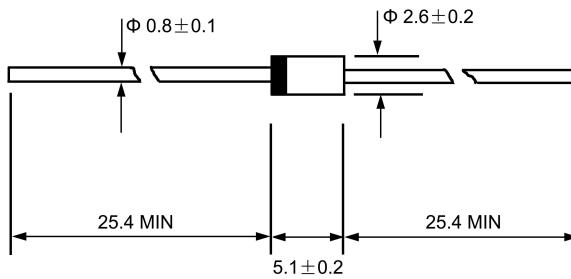
FEATURES

- ◇ Low cost
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case: JEDEC DO-41, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.012 ounces, 0.34 grams
- ◇ Mounting position: Any

DO - 41



Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

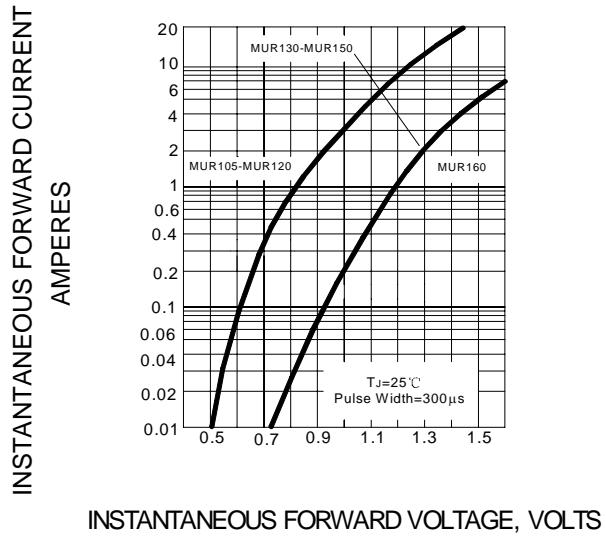
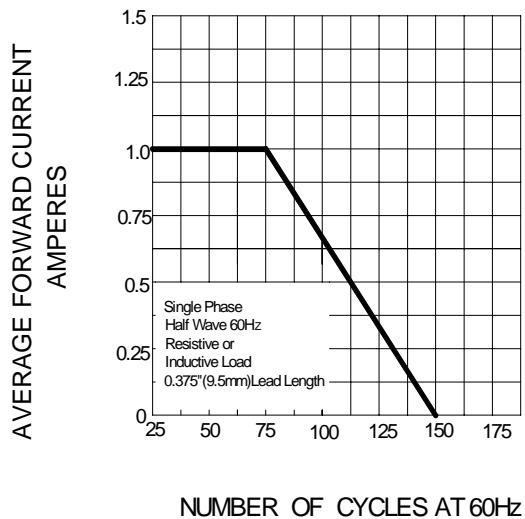
Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		MUR 105	MUR 110	MUR 115	MUR 120	MUR 130	MUR 140	MUR 150	MUR 160	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	150	200	300	400	500	600	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	350	420	V
Maximum DC blocking voltage	V_{DC}	50	100	150	200	300	400	500	600	V
Maximum average forward rectified current 9.5mm lead length, $@T_A=75^\circ\text{C}$	$I_{F(AV)}$	1.0								A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load $@T_J=125^\circ\text{C}$	I_{FSM}	35.0								A
Maximum instantaneous forward voltage $@ 1.0\text{A}$	V_F	0.875			1.40			1.40		V
Maximum reverse current $@T_A=25^\circ\text{C}$ at rated DC blocking voltage $@T_A=100^\circ\text{C}$	I_R	2.0			5.0			150		μA
Maximum reverse recovery time (Note1)		t_{rr}	25			50			ns	
Typical junction capacitance (Note2)		C_J	22			50			pF	
Typical thermal resistance (Note3)		$R_{\theta JA}$	50			50			$^\circ\text{C}/\text{W}$	
Operating junction temperature range		T_J	- 55 ----- + 150			- 55 ----- + 150			$^\circ\text{C}$	
Storage temperature range		T_{STG}	- 55 ----- + 150			- 55 ----- + 150			$^\circ\text{C}$	

NOTE: 1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.1V DC.

3. Thermal resistance from junction to ambient.

MUR105 -- MUR160**FIG.1 – TYPICAL FORWARD CHARACTERISTICS****FIG.2 – FORWARD DRAINING CURVE****FIG.3 – TYPICAL JUNCTION CAPACITANCE**