Discontinued Product

This version: Apr.26. 1999

OKI Semiconductor

MSC23V46407TD-xxBS16

4,194,304-Word x 64-Bit DYNAMIC RAM MODULE : FAST PAGE MODE TYPE

DESCRIPTION

The MSC23V46407TD-xxBS16 is a 4,194,304-word x 64-bit CMOS dynamic random access memory module which is composed of sixteen 16Mb(4Mx4) DRAMs in TSOP packages mounted with sixteen decoupling capacitors. This is an 168-pin dual in-line memory module. This module supports any application where high density and large capacity of storage memory are required.

FEATURES

· 4,194,304-word x 64-bit organization
· 168-pin Dual In-line Memory Module
· Gold tab
· Single 3.3V power supply, ±0.3V tolerance
· Input : LVTTL compatible
· Output : LVTTL compatible, 3-state
· Refresh : 2048cycles/ 32ms
· /CAS before /RAS refresh, hidden refresh, /RAS only refresh capability
· Fast page mode, read modify write capability
· Multi-bit test mode capability
· Serial Presence Detect


PRODUCT FAMILY

Family	Access Time (Max.)				Cycle Time (Min.)	Power Dissipation (Max.)	
	t_{RAC}	t_{AA}	t_{CAC}	t_{OEA}		Operating	Standby
MSC23V46407TD-50BS16	50ns	25ns	13ns	13ns	90ns	5760mW	28.8mW
MSC23V46407TD-60BS16	60ns	30ns	15ns	15ns	110ns	5184mW	
MSC23V46407TD-70BS16	70ns	35ns	20ns	20ns	130ns	4608mW	

MODULE OUTLINE

MSC23V46407TD-xxBS16

(Unit : mm)

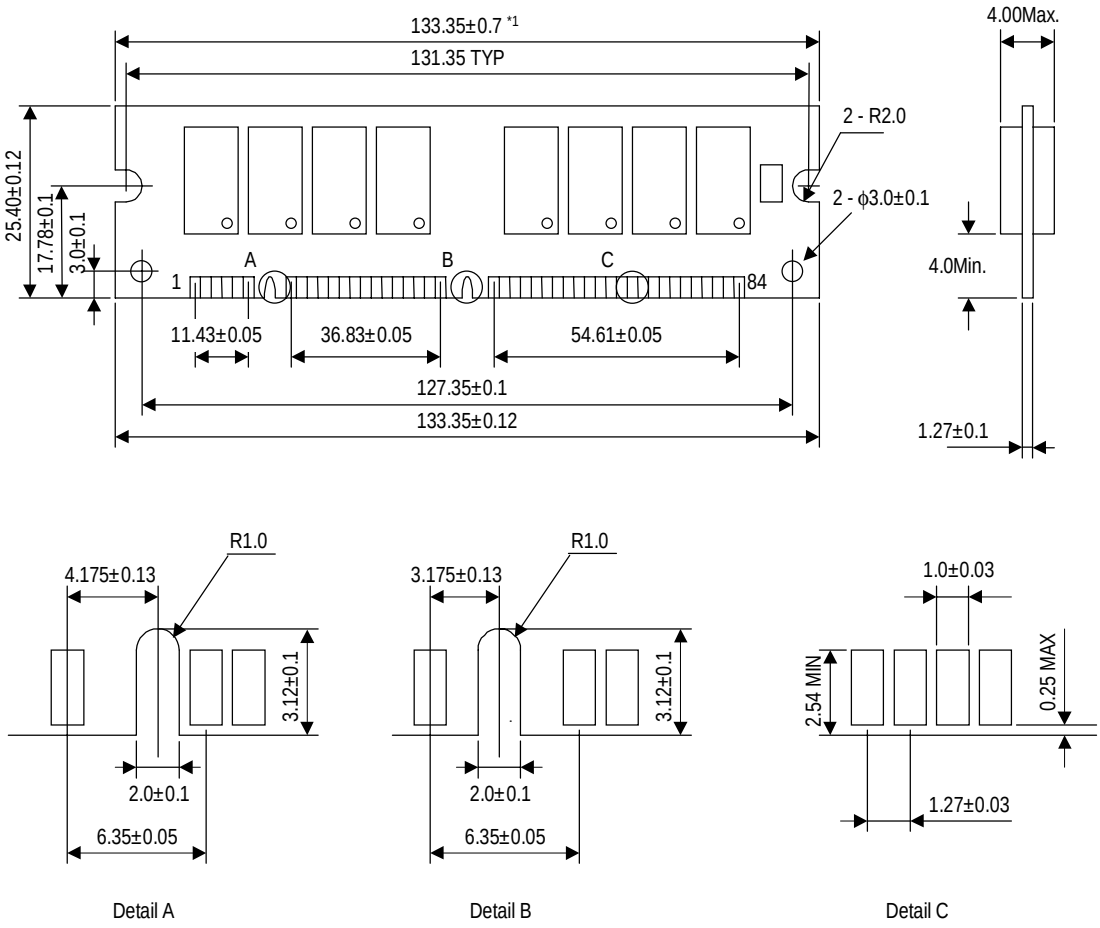

Detail A Detail B Detail C

Note:
1. Tolerance over 19.78mm from bottom edge is ±0.7.


PIN CONFIGURATION

Front Side		Back Side		Front Side		Back Side	
Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name
1	V_{SS}	85	V_{SS}	43	V_{SS}	127	V_{SS}
2	DQ0	86	DQ32	44	/OE2	128	NC
3	DQ1	87	DQ33	45	/RAS2	129	NC
4	DQ2	88	DQ34	46	/CAS2	130	/CAS6
5	DQ3	89	DQ35	47	/CAS3	131	/CAS7
6	V_{CC}	90	V_{CC}	48	/WE2	132	NC
7	DQ4	91	DQ36	49	V_{CC}	133	V_{CC}
8	DQ5	92	DQ37	50	NC	134	NC
9	DQ6	93	DQ38	51	NC	135	NC
10	DQ7	94	DQ39	52	NC	136	NC
11	DQ8	95	DQ40	53	NC	137	NC
12	V_{SS}	96	V_{SS}	54	V_{SS}	138	V_{SS}
13	DQ9	97	DQ41	55	DQ16	139	DQ48
14	DQ10	98	DQ42	56	DQ17	140	DQ49
15	DQ11	99	DQ43	57	DQ18	141	DQ50
16	DQ12	100	DQ44	58	DQ19	142	DQ51
17	DQ13	101	DQ45	59	V_{CC}	143	V_{CC}
18	V_{CC}	102	V_{CC}	60	DQ20	144	DQ52
19	DQ14	103	DQ46	61	NC	145	NC
20	DQ15	104	DQ47	62	NC	146	NC
21	NC	105	NC	63	NC	147	NC
22	NC	106	NC	64	V_{SS}	148	V_{SS}
23	V_{SS}	107	V_{SS}	65	DQ21	149	DQ53
24	NC	108	NC	66	DQ22	150	DQ54
25	NC	109	NC	67	DQ23	151	DQ55
26	V_{CC}	110	V_{CC}	68	V_{SS}	152	V_{SS}
27	/WE0	111	NC	69	DQ24	153	DQ56
28	/CAS0	112	/CAS4	70	DQ25	154	DQ57
29	/CAS1	113	/CAS5	71	DQ26	155	DQ58
30	/RAS0	114	NC	72	DQ27	156	DQ59
31	/OE0	115	NC	73	V_{CC}	157	V_{CC}
32	V_{SS}	116	V_{SS}	74	DQ28	158	DQ60
33	A0	117	A1	75	DQ29	159	DQ61
34	A2	118	A3	76	DQ30	160	DQ62
35	A4	119	A5	77	DQ31	161	DQ63
36	A6	120	A7	78	V_{SS}	162	V_{SS}
37	A8	121	A9	79	NC	163	NC
38	A10	122	NC	80	NC	164	NC
39	NC	123	NC	81	NC	165	SA0
40	V_{CC}	124	V_{CC}	82	SDA	166	SA1
41	V_{CC}	125	NC	83	SCL	167	SA2
42	NC	126	NC	84	V_{CC}	168	V_{CC}

Serial PD Matrix

Byte No.		Function described	SPD Value (Hex)	Note
0		Number of Byte used	80	128 Bytes
1		Total SPD Memory size	08	256 Bytes
2		Memory type	01	Fast Page
3		Number of Rows	0B	11
4		Number of Columns	0B	11
5		Number of Banks	01	1
6		Module Data Width	40	64
7		Module Data Width Continued	00	0
8		Supply Voltage	01	LVTTL
9	-50	/RAS Access Time	32	50ns
	-60		3C	60ns
	-70		46	70ns
10	-50	/CAS Access Time	0D	13ns
	-60		0F	15ns
	-70		14	20ns
11		DIMM Configuration type	00	Non-Parity
12		Refresh Rate/Type	00	Normal Refresh
13		Primary DRAM Width	04	x4
14		Error Checking DRAM Width	00	
15-61		Superset Information	00	Reserved
62		SPD Data Revision Code	01	1
63	-50	Checksum for Byte 0-62	25	
	-60		31	
	-70		40	
64-127		Reserved	00	
128-255		Unused Storage Location (Reserved)	FF	

BLOCK DIAGRAM

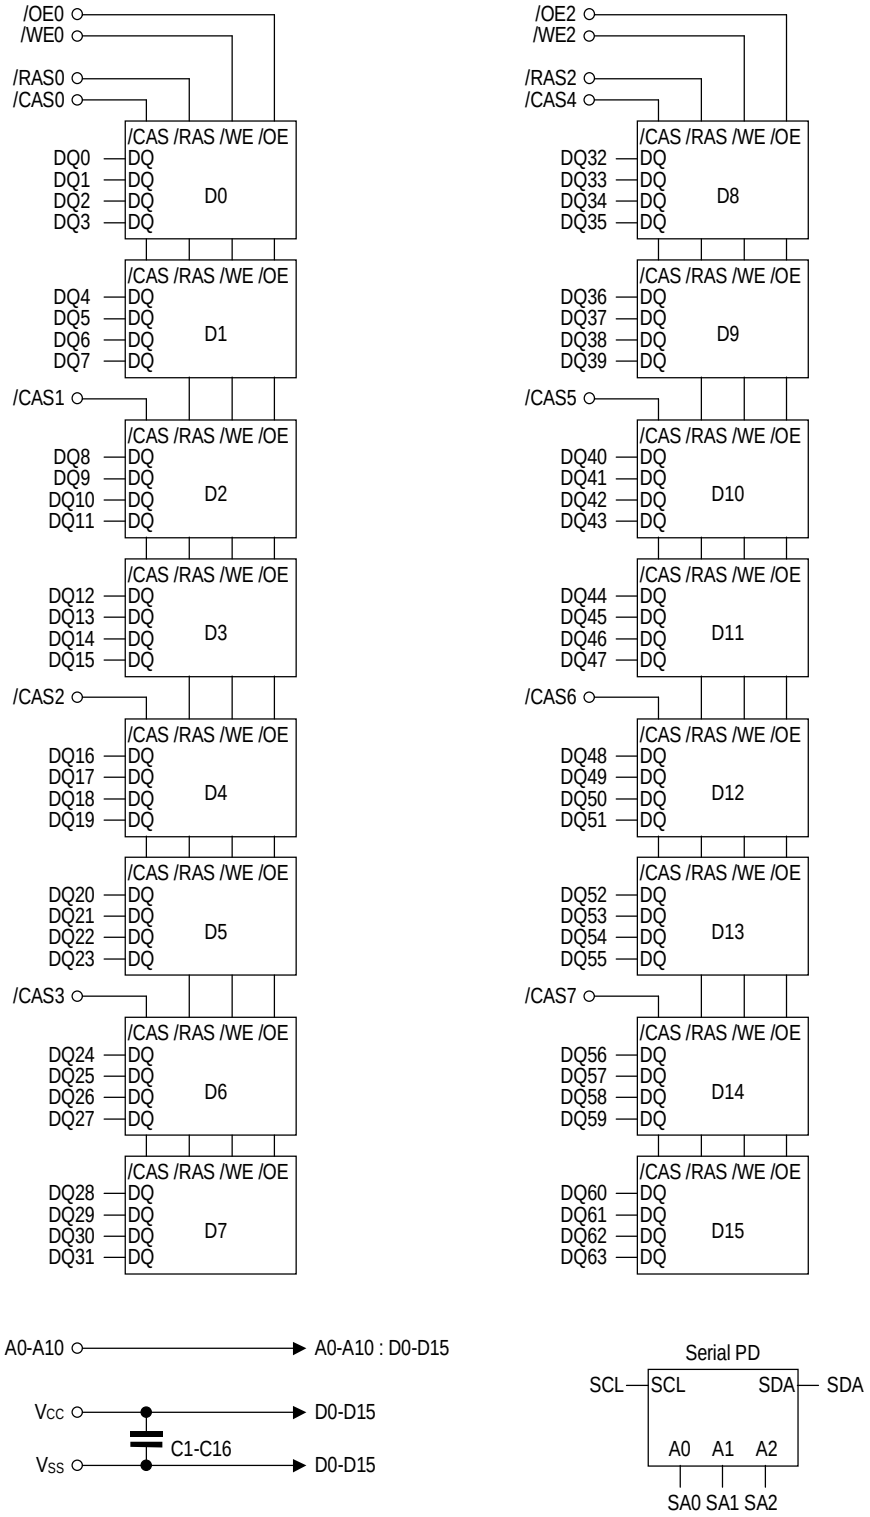

ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Voltage on Any Pin Relative to V_{SS}	V_{IN}, V_{OUT}	-0.5 to 4.6	V
Voltage on V_{CC} Supply Relative to V_{SS}	V_{CC}	-0.5 to 4.6	V
Short Circuit Output Current	I_{OS}	50	mA
Power Dissipation	P_D *	16	W
Operating Temperature	T_{OPR}	0 to 70	°C
Storage Temperature	T_{STG}	-40 to 125	°C

* Ta = 25°C

Recommended Operating Conditions

(Ta = 0°C to 70°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power Supply Voltage	V_{CC}	3.0	3.3	3.6	V
	V_{SS}	0	0	0	V
Input High Voltage	V_{IH}	2.0	-	V_{CC}+0.3	V
Input Low Voltage	V_{IL}	-0.3	-	0.8	V

Capacitance

(V_{CC} = 3.3V ±0.3V, Ta = 25°C, f = 1 MHz)

Parameter	Symbol	Typ.	Max.	Unit
Input Capacitance (A0 - A10)	C_{IN1}	-	109	pF
Input Capacitance (/RAS0, /RAS2, /WE0, /WE2, /OE0, /OE2)	C_{IN2}	-	65	pF
Input Capacitance (/CAS0 - /CAS7)	C_{IN3}	-	20	pF
I/O Capacitance (DQ0 - DQ63)	$C_{I/O}$	-	16	pF

DC Characteristics

(V_{CC} = 3.3V ±0.3V, Ta = 0°C to 70°C)

Parameter	Symbol	Condition	-50		-60		-70		Unit	Note
			Min.	Max.	Min.	Max.	Min.	Max.		
Output High Voltage	V_{OH}	I_{OH} = -2.0mA	2.4	V_{CC}	2.4	V_{CC}	2.4	V_{CC}	V	
Output Low Voltage	V_{OL}	I_{OL} = 2.0mA	0	0.4	0	0.4	0	0.4	V	
Input Leakage Current	I_{LI}	0V ≤ V_{IN} ≤ V_{CC}+0.3V; All other pins not under test = 0V	-160	160	-160	160	-160	160	µA	
Output Leakage Current	I_{LO}	DQ disable 0V ≤ V_{OUT} ≤ V_{CC}	-10	10	-10	10	-10	10	µA	
Average Power Supply Current (Operating)	I_{CC1}	/RAS, /CAS cycling, t_{RC} = Min.	-	1600	-	1440	-	1280	mA	1, 2
Power Supply Current (Standby)	I_{CC2}	/RAS, /CAS = V_{IH}	-	32	-	32	-	32	mA	1
		/RAS, /CAS ≥ V_{CC} -0.2V	-	8	-	8	-	8	mA	
Average Power Supply Current (/RAS only refresh)	I_{CC3}	/RAS cycling, /CAS = V_{IH}, t_{RC} = Min.	-	1600	-	1600	-	1600	mA	1, 2
Average Power Supply Current (/CAS before /RAS refresh)	I_{CC6}	/RAS cycling, /CAS before /RAS	-	1600	-	1600	-	1600	mA	1, 2
Average Power Supply Current (Fast Page Mode)	I_{CC7}	/RAS = V_{IL}, /CAS cycling, t_{PC} = Min.	-	1200	-	1120	-	1040	mA	1, 3

Notes: 1. I_{CC} Max. is specified as I_{CC} for output open condition.
2. The address can be changed once or less while /RAS = V_{IL}.
3. The address can be changed once or less while /CAS = V_{IH}.

AC Characteristics (1/2)

(V_{CC} = 3.3V ±0.3V, Ta = 0°C to 70°C) Note: 1, 2, 3, 11, 12

Parameter	Symbol	-50		-60		-70		Unit	Note
		Min.	Max.	Min.	Max.	Min.	Max.		
Random Read or Write Cycle Time	t_{RC}	90	-	110	-	130	-	ns	
Read Modify Write Cycle Time	t_{RWC}	131	-	155	-	185	-	ns	
Fast Page Mode Cycle Time	t_{PC}	35	-	40	-	45	-	ns	
Fast Page Mode Read Modify Write Cycle Time	t_{PRWC}	76	-	85	-	100	-	ns	
Access Time from /RAS	t_{RAC}	-	50	-	60	-	70	ns	4, 5, 6
Access Time from /CAS	t_{CAC}	-	13	-	15	-	20	ns	4, 5
Access Time from Column Address	t_{AA}	-	25	-	30	-	35	ns	4, 6
Access Time from /CAS Precharge	t_{CPA}	-	30	-	35	-	40	ns	4
Access Time from /OE	t_{OEA}	-	13	-	15	-	20	ns	4
Output Low Impedance Time from /CAS	t_{CLZ}	0	-	0	-	0	-	ns	4
/CAS to Data Output Buffer Turn-off Delay Time	t_{OFF}	0	13	0	15	0	20	ns	7
/OE to Data Output Buffer Turn-off Delay Time	t_{OEZ}	0	13	0	15	0	20	ns	7
Transition Time	t_T	3	50	3	50	3	50	ns	3
Refresh Period	t_{REF}	-	32	-	32	-	32	ms	
/RAS Precharge Time	t_{RP}	30	-	40	-	50	-	ns	
/RAS Pulse Width	t_{RAS}	50	10K	60	10K	70	10K	ns	
/RAS Pulse Width (Fast Page Mode)	t_{RASP}	50	100K	60	100K	70	100K	ns	
/RAS Hold Time	t_{RSH}	13	-	15	-	20	-	ns	
/RAS Hold Time referenced to /OE	t_{ROH}	13	-	15	-	20	-	ns	
/CAS Precharge Time (Fast Page Mode)	t_{CP}	7	-	10	-	10	-	ns	
/CAS Pulse Width	t_{CAS}	13	10K	15	10K	20	10K	ns	
/CAS Hold Time	t_{CSH}	50	-	60	-	70	-	ns	
/CAS to /RAS Precharge Time	t_{CRP}	5	-	5	-	5	-	ns	
/RAS Hold Time from /CAS Precharge	t_{RHCP}	30	-	35	-	40	-	ns	
/RAS to /CAS Delay Time	t_{RCD}	17	37	20	45	20	50	ns	5
/RAS to Column Address Delay Time	t_{RAD}	12	25	15	30	15	35	ns	6
Row Address Set-up Time	t_{ASR}	0	-	0	-	0	-	ns	
Row Address Hold Time	t_{RAH}	7	-	10	-	10	-	ns	
Column Address Set-up Time	t_{ASC}	0	-	0	-	0	-	ns	
Column Address Hold Time	t_{CAH}	7	-	10	-	15	-	ns	
Column Address to /RAS Lead Time	t_{RAL}	25	-	30	-	35	-	ns	
Read Command Set-up Time	t_{RCS}	0	-	0	-	0	-	ns	
Read Command Hold Time	t_{RCH}	0	-	0	-	0	-	ns	8
Read Command Hold Time referenced to /RAS	t_{RRH}	0	-	0	-	0	-	ns	8

AC Characteristics (2/2)

(V_{CC} = 3.3V ±0.3V, Ta = 0°C to 70°C) Note: 1, 2, 3, 11, 12

Parameter	Symbol	-50		-60		-70		Unit	Note
		Min.	Max.	Min.	Max.	Min.	Max.		
Write Command Set-up Time	t_{WCS}	0	-	0	-	0	-	ns	9
Write Command Hold Time	t_{WCH}	7	-	10	-	15	-	ns	
Write Command Pulse Width	t_{WP}	7	-	10	-	10	-	ns	
/OE Command Hold Time	t_{OEH}	13	-	15	-	20	-	ns	
Write Command to /RAS Lead Time	t_{RWL}	13	-	15	-	20	-	ns	
Write Command to /CAS Lead Time	t_{CWL}	13	-	15	-	20	-	ns	
Data-in Set-up Time	t_{DS}	0	-	0	-	0	-	ns	10
Data-in Hold Time	t_{DH}	7	-	10	-	15	-	ns	10
/OE to Data-in Delay Time	t_{OED}	13	-	15	-	20	-	ns	
/CAS to /WE Delay Time	t_{CWD}	36	-	40	-	50	-	ns	9
Column Address to /WE Delay Time	t_{AWD}	48	-	55	-	65	-	ns	9
/RAS to /WE Delay Time	t_{RWD}	73	-	85	-	100	-	ns	9
/CAS Precharge /WE Delay Time	t_{CPWD}	53	-	60	-	70	-	ns	9
/CAS Active Delay Time from /RAS Precharge	t_{RPC}	5	-	5	-	5	-	ns	
/RAS to /CAS Set-up Time (/CAS before /RAS)	t_{CSR}	10	-	10	-	10	-	ns	
/RAS to /CAS Hold Time (/CAS before /RAS)	t_{CHR}	10	-	10	-	10	-	ns	
/WE to /RAS Precharge Time (/CAS before /RAS)	t_{WRP}	10	-	10	-	10	-	ns	
/WE Hold Time from /RAS (/CAS before /RAS)	t_{WRH}	10	-	10	-	10	-	ns	
/RAS to /WE Set-up Time (Test Mode)	t_{WTS}	10	-	10	-	10	-	ns	
/RAS to /WE Hold Time (Test Mode)	t_{WTH}	10	-	10	-	10	-	ns	

Notes: 1. A start-up delay of 200µs is required after power-up, followed by a minimum of eight initialization cycles (/RAS only refresh or /CAS before /RAS refresh) before proper device operation is achieved.

2. The AC characteristics assume t_T = 5ns.

3. V_{IH}(Min.) and V_{IL}(Max.) are reference levels for measuring input timing signals. Transition times (t_T) are measured between V_{IH} and V_{IL}.

4. This parameter is measured with a load circuit equivalent to 1 TTL load and 100pF.
The output timing reference levels are V_{OH} = 2.0V and V_{OL} = 0.8V.

5. Operation within the t_{RCD}(Max.) limit ensures that t_{RAC}(Max.) can be met.
t_{RCD}(Max.) is specified as a reference point only. If t_{RCD} is greater than the specified t_{RCD}(Max.) limit, then the access time is controlled by t_{CAC}.

6. Operation within the t_{RAD}(Max.) limit ensures that t_{RAC}(Max.) can be met.
t_{RAD}(Max.) is specified as a reference point only. If t_{RAD} is greater than the specified t_{RAD}(Max.) limit, then the access time is controlled by t_{AA}.

7. t_{OFF}(Max.) and t_{OEZ}(Max.) define the time at which the output achieves the open circuit condition and are not referenced to output voltage levels.

8. t_{RCH} or t_{RRH} must be satisfied for a read cycle.

9. t_{WCS}, t_{CWD}, t_{RWD}, t_{AWD} and t_{CPWD} are not restrictive operating parameters. They are included in the data sheet as electrical characteristics only. If $t_{WCS} \geq t_{WCS}$(Min.), then the cycle is an early write cycle and the data out will remain open circuit (high impedance) throughout the entire cycle. If $t_{CWD} \geq t_{CWD}$(Min.), $t_{RWD} \geq t_{RWD}$(Min.), $t_{AWD} \geq t_{AWD}$(Min.) and $t_{CPWD} \geq t_{CPWD}$(Min.), then the cycle is a read modify write cycle and data out will contain data read from the selected cell; if neither of the above sets of conditions is satisfied, then the condition of the data out (at access time) is indeterminate.

10. These parameters are referenced to the /CAS leading edge in an early write cycle, and to the /WE leading edge in an /OE control write cycle, or a read modify write cycle.

11. The test mode is initiated by performing a /WE and /CAS before /RAS refresh cycle. This mode is latched and remains in effect until the exit cycle is generated. The test mode specified in this data sheet is a 4-bit parallel test function. CA0 and CA1 are not used. In a read cycle, if all internal bits are equal, the DQ pin will indicate a high level. If any internal bits are not equal, the DQ pin will indicate a low levels. The test mode is cleared and the memory device returned to its normal operating state by performing a /RAS only refresh cycle or a /CAS before /RAS refresh cycle.

12. In a test mode read cycle, the value of access time parameters is delayed for 5ns for the specified value. These parameters should be specified in test mode cycle by adding the above value to the specified value in this data sheet.