

Contact insert - HC-M-DSUB 09/O2T-MOD-BU - 1636444

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

HEAVYCON contact insert module, female, D-SUB 09, 2-pos., for RS-485-based bus systems with T functionality, with screw connection, pin 3 and 8 mounted, for HEAVYCON Modular



Key commercial data

Packing unit	1 pc
Minimum order quantity	2 pc
Weight per Piece (excluding packing)	31.81 GRM
Custom tariff number	85366990
Country of origin	Germany

Technical data

General

Note	For HEAVYCON-ADVANCE housing of type B6 up to B24 and HEAVYCON housing of type B6 up to B48, HC-M-MHR hinged retaining frame...required. PROFIBUS T function: Pin 8: Signal A; Pin 3: Signal B. For inverted crimp contacts as per DIN 41652.
Connection method	Screw connection
Tightening torque	0.15 Nm
Pollution degree	3
Surge voltage category	III
Number of positions	2
Insertion/withdrawal cycles	≥ 500
Conductor cross section	0.09 mm ² ... 0.5 mm ²
Connection cross section AWG	28 ... 20
Stripping length of the individual wire	3.8 mm
Assembly instructions	Housing height ≥ 52 mm. Plug-in connections may only be operated only when there is no load/voltage. Use of HC-CST (1676857) coding pins and HC-CBU (1676860) coding sockets has been prescribed.

Contact insert - HC-M-DSUB 09/O2T-MOD-BU - 1636444

Technical data

General

Connection	Signal A is pin 8; signal B is pin 3
------------	--------------------------------------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Material data

Inflammability class according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Au
Contact carrier material	PC

Electrical characteristics

Rated voltage (III/3)	50 V
Rated surge voltage	0.8 kV
Rated current	5 A

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440209

ETIM

ETIM 3.0	EC000438
ETIM 4.0	EC000438
ETIM 5.0	EC000438

UNSPSC

UNSPSC 6.01	30211923
UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121522

Contact insert - HC-M-DSUB 09/O2T-MOD-BU - 1636444

Approvals

Approvals

Approvals

GOST

Ex Approvals

Approvals submitted

Approval details




Drawings

Schematic diagram


Functional drawing

Connector pin assignment

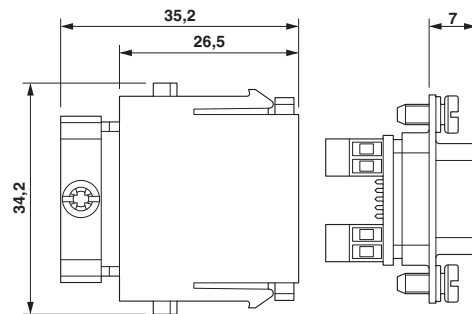

Contact insert - HC-M-DSUB 09/O2T-MOD-BU - 1636444

Dimensioned drawing

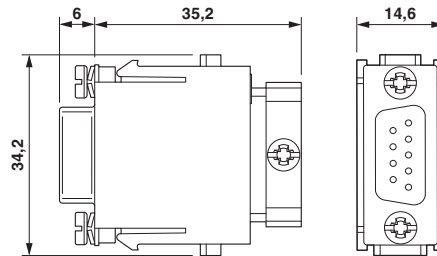

Female insert