



Features


- ◇ For IF SAW filter
- ◇ High attenuation
- ◇ Single-ended operation
- ◇ Dual In-line Package
- ◇ No matching required for operation at 50Ω
- ◇ RoHS compliant (2002/95/EC), Pb-free

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	154.75	154.9	155.05
Insertion Loss	dB	-	23.7	30
1.5 dB Bandwidth	MHz	-	8.16	-
3 dB Bandwidth	MHz	8.25	8.31	-
35 dB Bandwidth	MHz	-	9.1	9.2
40 dB Bandwidth	MHz	-	9.16	-
45 dB Bandwidth	MHz	-	9.21	9.6
50 dB Bandwidth	MHz	-	9.27	10.4
53 dB Bandwidth	MHz	-	9.31	18.4
Group Delay Variation($f_0 \pm 1.3\text{MHz}$)	nsec	-	310	-
Passband Variation	dB	-	0.7	1.5
Absolute Delay	usec	-	3.15	-
Ultimate Rejection($f_0 \pm 19.2\text{MHz}$)	dB	53	57	-
Material Temperature coefficient	KHz/°C	-14.6		
Substrate Material	-	YZ LN		
Ambient Temperature	°C	25		
DC Voltage	V	0		
Input Power	dBm	-	-	10
ESD Class	-	1A		
Package Size	DIP3512 (35.0x12.8x4.7mm3)			

Notes:

1. All specifications are based on the test circuit shown;
2. In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
4. This is the optimum impedance in order to achieve the performance show.

	SIPAT Co., Ltd. (CETC No.26 Research Institute) #14 Nanping Huayuan Road, Chongqing, China, 400060	Part Number	LBN15502	
		Rev. Date	2010-07-21	
		Ver.	1.0	Page


Matching Configuration



Source/Load Impedance=50 ohm

Notes - Component values may change depending on board layout.

Package Dimension

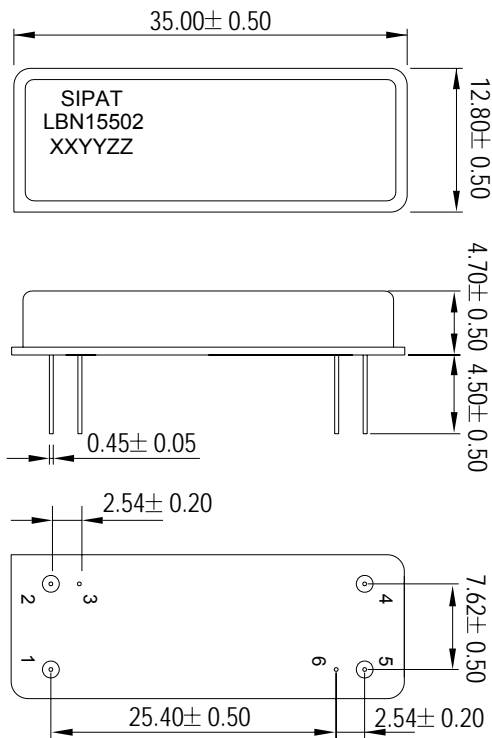

Pad Configuration:

Input 1
Output 5
Ground All Others

Marking Configuration:

- 1) SIPAT: Manufacturer Name
- 2) LBN15502: Part Number
- 3) XXYY: Date(Year/month)
- 4) ZZ: Identified Code

Package: DIP3512

Unit: mm



SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBN15502	
Rev. Date	2010-07-21	
Ver.	1.0	Page 2/3



Typical Performance

