
8-INPUT DATA SELECTOR/MULTIPLEXER WITH 3-STATE OUTPUTS

High-Performance Silicon-Gate CMOS

The IN74HC251 is identical in pinout to the LS/ALS251. The device inputs are compatible with standard CMOS outputs; with pullup resistors, they are compatible with LS/ALSTTL outputs.

The device selects one of the eight binary Data Inputs, as determined by the Address Inputs. The Output Enable pin must be at a low level for the selected data to appear at the outputs. If Output Enable is high, the Y and the Y outputs are in the high-impedance state. This 3-State feature allows the IN74HC251 to be used in bus-oriented systems.


- Outputs Directly Interface to CMOS, NMOS, and TTL
- Operating Voltage Range: 2.0 to 6.0 V
- Low Input Current: 1.0 μA
- High Noise Immunity Characteristic of CMOS Devices

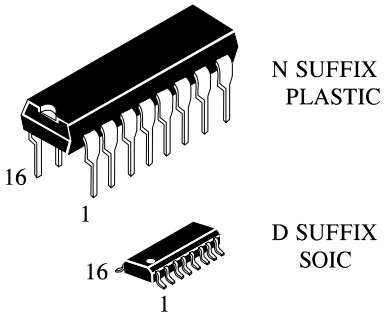


ORDERING INFORMATION

IN74HC251N Plastic
IN74HC251D SOIC
T_A = -55° to 125° C for all packages

PIN ASSIGNMENT



LOGIC DIAGRAM

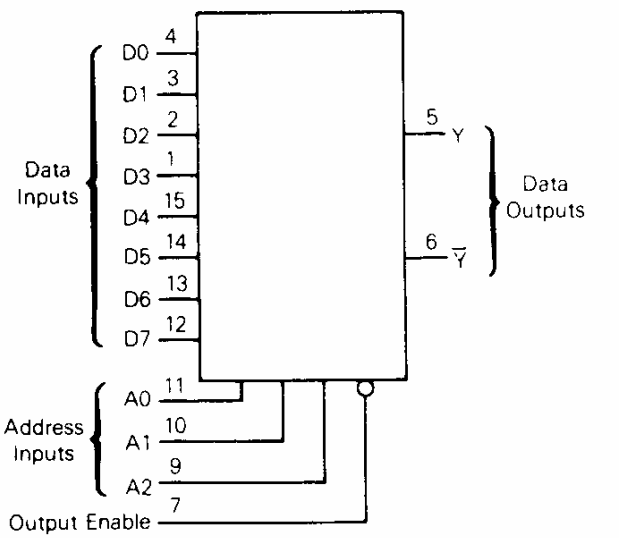

PIN 16 =V_{CC}
PIN 8 = GND

FUNCTION TABLE

Inputs				Outputs	
A2	A1	A0	OE	Y	$\overline{Y}$
X	X	X	H	Z	Z
L	L	L	L	D0	$\overline{D0}$
L	L	H	L	D1	$\overline{D1}$
L	H	L	L	D2	$\overline{D2}$
L	H	H	L	D3	$\overline{D3}$
H	L	L	L	D4	$\overline{D4}$
H	L	H	L	D5	$\overline{D5}$
H	H	L	L	D6	$\overline{D6}$
H	H	H	L	D7	$\overline{D7}$

D0,D1...D7=the level of the respective D input
Z = high-impedance state
X = don't care

INTEGRAL

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
V_{CC}	DC Supply Voltage (Referenced to GND)	-0.5 to +7.0	V
V_{IN}	DC Input Voltage (Referenced to GND)	-1.5 to V_{CC} +1.5	V
V_{OUT}	DC Output Voltage (Referenced to GND)	-0.5 to V_{CC} +0.5	V
I_{IN}	DC Input Current, per Pin	±25	mA
I_{OUT}	DC Output Current, per Pin	±50	mA
I_{CC}	DC Supply Current, V_{CC} and GND Pins	±75	mA
P_D	Power Dissipation in Still Air, Plastic DIP+ SOIC Package+	750 500	mW
Tstg	Storage Temperature	-65 to +150	°C
T_L	Lead Temperature, 1 mm from Case for 10 Seconds (Plastic DIP or SOIC Package)	260	°C

*Maximum Ratings are those values beyond which damage to the device may occur. Functional operation should be restricted to the Recommended Operating Conditions.
+Derating - Plastic DIP: - 10 mW/°C from 65° to 125°C
SOIC Package: : - 7 mW/°C from 65° to 125°C

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter		Min	Max	Unit
V_{CC}	DC Supply Voltage (Referenced to GND)		2.0	6.0	V
V_{IN}, V_{OUT}	DC Input Voltage, Output Voltage (Referenced to GND)		0	V_{CC}	V
T_A	Operating Temperature, All Package Types		-55	+125	°C
t_r, t_f	Input Rise and Fall Time (Figure 1)	V_{CC} =2.0 V	0	1000	ns
		V_{CC} =4.5 V	0	500	
		V_{CC} =6.0 V	0	400	

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation, V_{IN} and V_{OUT} should be constrained to the range GND≤(V_{IN} or V_{OUT})≤V_{CC}.

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V_{CC}). Unused outputs must be left open.

DC ELECTRICAL CHARACTERISTICS(Voltages Referenced to GND)

Symbol	Parameter	Test Conditions	V_{CC} V	Guaranteed Limit			Unit
				25 °C to -55°C	≤85 °C	≤125 °C	
V_{IH}	Minimum High-Level Input Voltage	V_{OUT}=0.1 V or V_{CC}-0.1 V $\|I_{OUT}\| \leq 20\ \mu A$	2.0 4.5 6.0	1.5 3.15 4.2	1.5 3.15 4.2	1.5 3.15 4.2	V
V_{IL}	Maximum Low - Level Input Voltage	V_{OUT}=0.1 V or V_{CC}-0.1 V $\|I_{OUT}\| \leq 20\ \mu A$	2.0 4.5 6.0	0.3 0.9 1.2	0.3 0.9 1.2	0.3 0.9 1.2	V
V_{OH}	Minimum High-Level Output Voltage	V_{IN}=V_{IH} or V_{IL} $\|I_{OUT}\| \leq 20\ \mu A$	2.0 4.5 6.0	1.9 4.4 5.9	1.9 4.4 5.9	1.9 4.4 5.9	V
		V_{IN}=V_{IH} or V_{IL} $\|I_{OUT}\| \leq 4.0$ mA $\|I_{OUT}\| \leq 5.2$ mA	4.5 6.0	3.98 5.48	3.84 5.34	3.7 5.2	
V_{OL}	Maximum Low-Level Output Voltage	V_{IN}=V_{IH} or V_{IL} $\|I_{OUT}\| \leq 20\ \mu A$	2.0 4.5 6.0	0.1 0.1 0.1	0.1 0.1 0.1	0.1 0.1 0.1	V
		V_{IN}=V_{IH} or V_{IL} $\|I_{OUT}\| \leq 4.0$ mA $\|I_{OUT}\| \leq 5.2$ mA	4.5 6.0	0.26 0.26	0.33 0.33	0.4 0.4	
I_{IN}	Maximum Input Leakage Current	V_{IN}=V_{CC} or GND	6.0	±0.1	±1.0	±1.0	μA
I_{OZ}	Maximum Three-State Leakage Current	Output in High-Impedance State V_{IN}= V_{IL} or V_{IH} V_{OUT}=V_{CC} or GND	6.0	±0.5	±5.0	±10	μA
I_{CC}	Maximum Quiescent Supply Current (per Package)	V_{IN}=V_{CC} or GND I_{OUT}=0μA	6.0	8.0	80	160	μA

AC ELECTRICAL CHARACTERISTICS(C_L=50pF,Input t_r=t_f=6.0 ns)

Symbol	Parameter	V_{CC} V	Guaranteed Limit			Unit
			25 °C to -55°C	≤85°C	≤125 °C	
t_{PLH}, t_{PHL}	Maximum Propagation Delay, Input D to Output Y or $\overline{Y}$ (Figures 1,2 and 5)	2.0 4.5 6.0	185 37 31	230 46 39	280 56 48	ns
t_{PLH}, t_{PHL}	Maximum Propagation Delay , Input A to Output Y or $\overline{Y}$ (Figures 3 and 5)	2.0 4.5 6.0	205 41 35	255 51 43	310 62 53	ns
t_{PLZ}, t_{PHZ}	Maximum Propagation Delay , Output Enable to Output Y (Figures 4 and 6)	2.0 4.5 6.0	195 39 33	245 48 42	295 59 50	ns
t_{PZL}, t_{PZH}	Maximum Propagation Delay , Output Enable to Output Y (Figures 4 and 6)	2.0 4.5 6.0	145 29 25	180 36 31	220 44 38	ns
t_{PLZ}, t_{PHZ}	Maximum Propagation Delay , Output Enable $\overline{}$ to Output Y (Figures 4 and 6)	2.0 4.5 6.0	220 44 37	275 55 47	330 66 56	ns
t_{PZL}, t_{PZH}	Maximum Propagation Delay , Output Enable $\overline{}$ to Output Y (Figures 4 and 6)	2.0 4.5 6.0	150 30 26	190 38 33	225 45 38	ns
t_{TLH}, t_{THL}	Maximum Output Transition Time, Any Output (Figures 1 and 6)	2.0 4.5 6.0	75 15 13	95 19 16	110 22 19	ns
C_{IN}	Maximum Input Capacitance	-	10	10	10	pF
C_{OUT}	Maximum Three-State Output Capacitance (Output in High-Impedance State)	-	15	15	15	pF

C_{PD}	Power Dissipation Capacitance (Per Package) Used to determine the no-load dynamic power consumption: $P_D=C_{PD}V_{CC}^2f+I_{CC}V_{CC}$	Typical @25°C,V_{CC}=5.0 V 36	pF

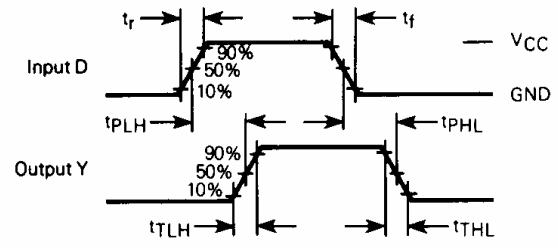


Figure 1. Switching Waveforms

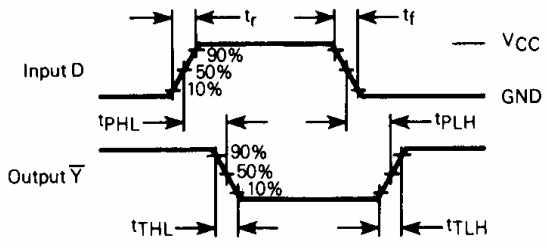


Figure 2. Switching Waveforms

INTEGRAL

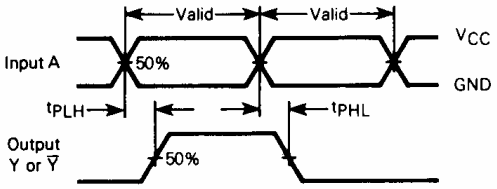


Figure 3. Switching Waveforms

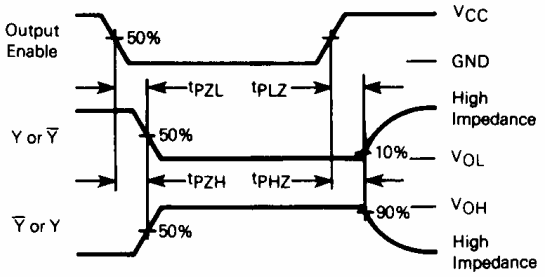


Figure 4. Switching Waveforms




Figure 5. Test Circuit


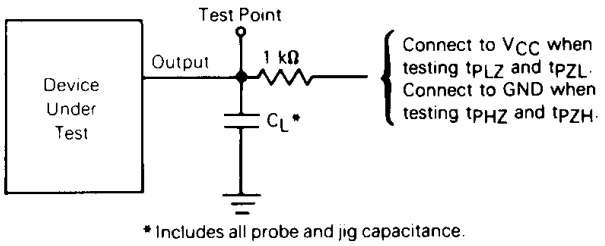


Figure 6.Test Circuit

EXPANDED LOGIC DIAGRAM

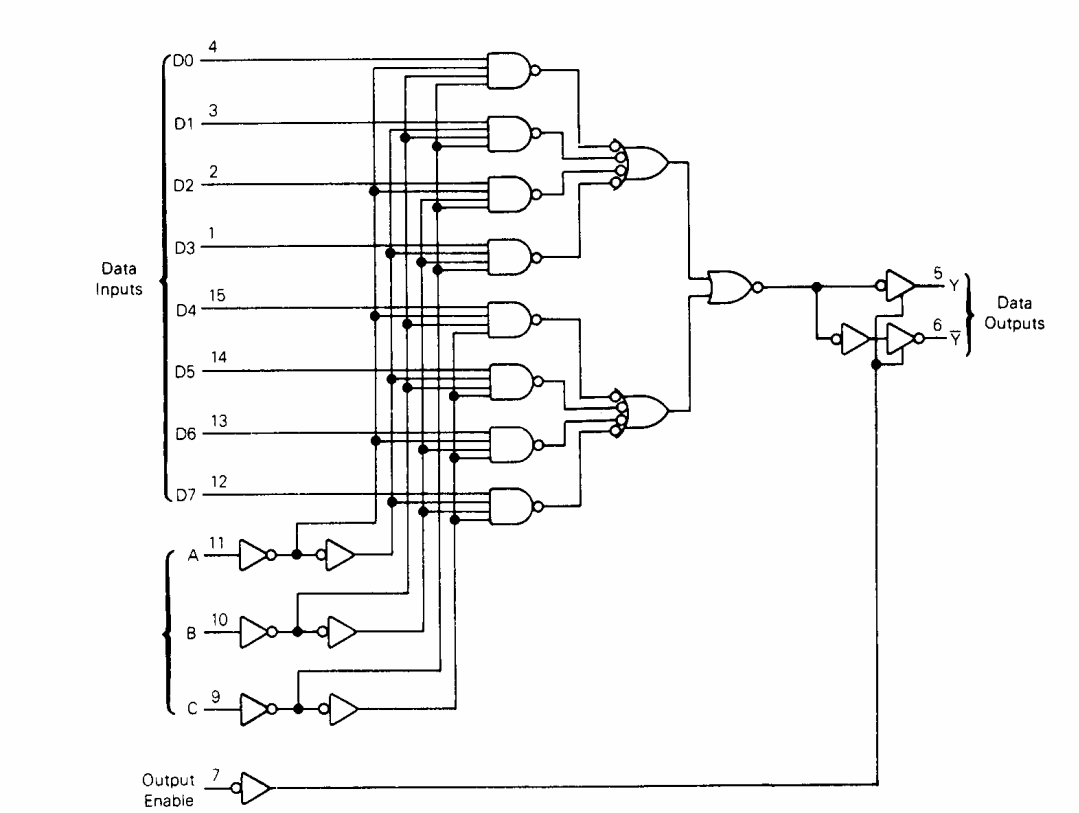

INTEGRAL