

General Description


KR Electronics part number 2753 is a 157.5 MHz elliptic type bandpass filter. The filter has a minimum 3 dB bandwidth of 55 MHz. Other center frequencies and bandwidths available. Please consult the factory.

Features

- 157.5 MHz Center Frequency
- 55 MHz min 3 dB Bandwidth
- Sharp Transition to Stopband
- 50 Ω Source and Load
- Surface Mount
- Also available with SMA connectors

Typical Performance

Overall Response
(10 dB/div)

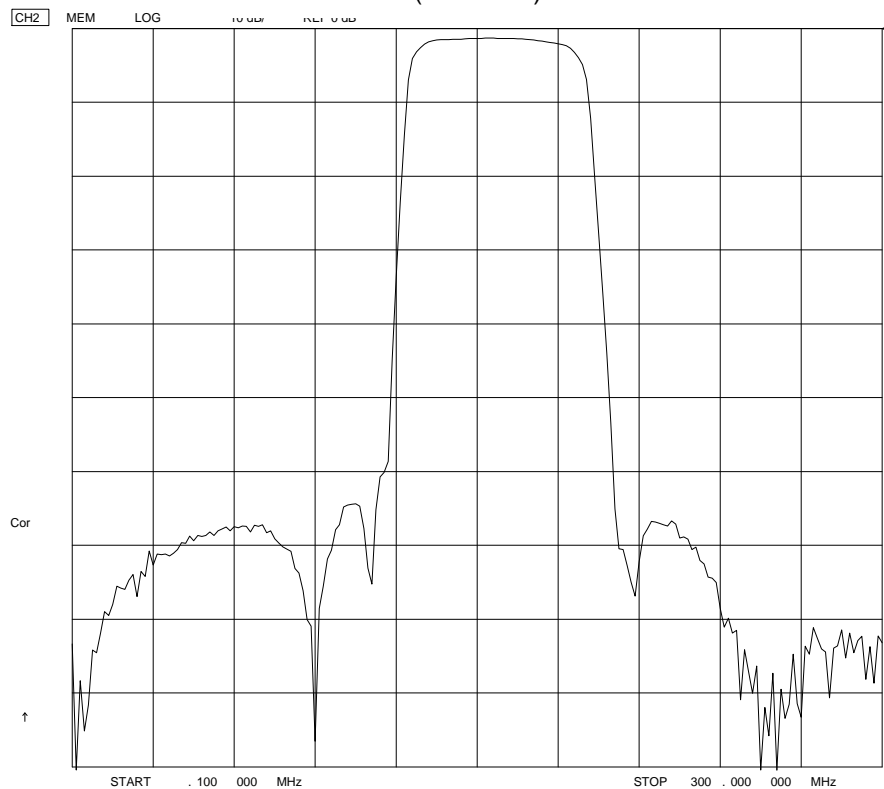

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2753

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	157.5 MHz
Insertion Loss	< 2 dB
3 dB Bandwidth	55 MHz min
Rejection at 115 MHz	50 dB min
Rejection at 200 MHz	50 dB min
Source and Load	50 Ω

Physical Dimensions

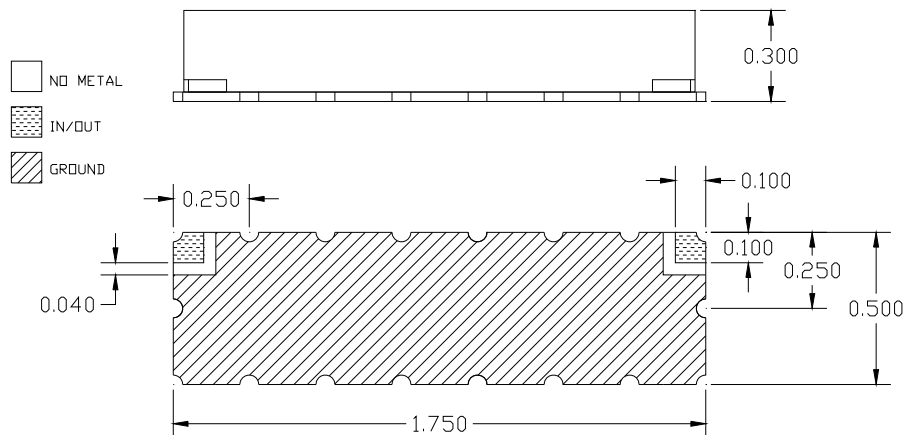

Notes:

1. Surface mount package, metal cover
2. Dimensions in inches
3. Max reflow temperature 230° C for 10 sec
4. If boards are cleaned after installation units must be completely dried
5. Also available in metal case with SMA connectors

KR Electronics, Inc.
 91 Avenel Street
 Avenel, NJ 07001

Web www.krfilters.com
 Email sales@krfilters.com
 Phone (732) 636-1900
 Fax (732) 636-1982