

## 14 pin Dual-in-line Sine Wave Clock Oscillators

### FEATURES

- Sine Wave output in industry-standard 14 DIL package
- Choice of output loads
- Harmonics -25dBc maximum
- Very low current consumption <1.0mA for HSR14

### DESCRIPTION

HS14 sine wave clock oscillators provide a true sine wave out output while being packaged in the industry-standard, 14 pin DIL outline package. The oscillator is capable of being produced with close tolerances and exhibits low current consumption.

### SPECIFICATION

Frequency Range	HS14 at 3.3 Volts: 10.0MHz to 800.0MHz
	HS14 at 5.0 Volts: 10MHz to 156.0 MHz
	HSR14: 10MHz to 30MHz
Input Voltage	HS14: +3.3V or +5.0VDC ±5%
	HSR14: +2.8V, +3.3V or +5.0VDC ±5%
Output Wave Form:	True sine wave
Frequency Stability	0~70°C: ±25ppm, ±50ppm or ±100ppm*
	-40 ~+85°C: ±25ppm, ±50ppm or ±100ppm*
Output Level	HS14: 0dBm into 50 Ohms <5dBm available
	HSR14: 10kΩ//10pF load, level 1.0V p-p
Harmonics:	-25dBc maximum
Phase Noise:	-130 dBC/Hz at 1kHz offset
Current Consumption:	See table
Start-up Time:	2.0ms typical
Storage Temperature:	-55° to +125°C
Sub-Harmonics:	None
Ageing: ±5ppm/year	
Enable/Disable Option:	Output is high impedance when pad 1 is taken LOW.
	150ns maximum
	(Add 'T' to the part number code for this option.)
RoHS Status:	Compliant and Non-compliant versions are available.


\* Non-standard frequency stability is available, check with sales.

### CURRENT CONSUMPTION

Type/Frequency	Supply Voltage (±5%)		
	+2.8	+3.3V	+5.0V
HS14 10MHz	-	9mA	18mA
HS14 100MHz	-	18mA	34mA
HS14 150MHz	-	19mA	36mA
HSR14 10MHz	1.0mA	1.1mA	1.2mA



### OUTLINE & DIMENSIONS

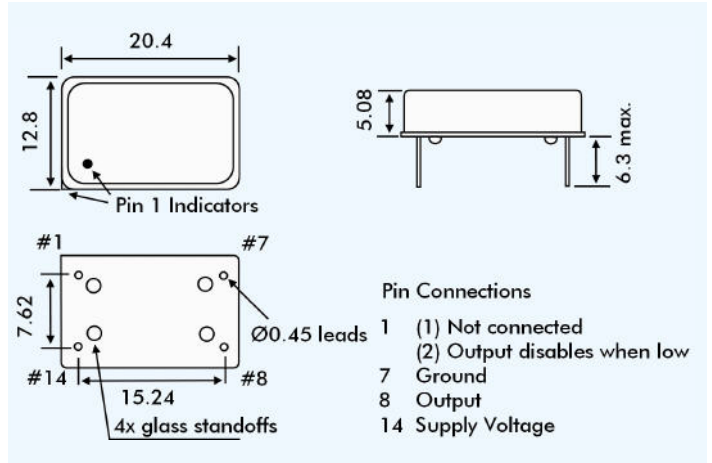

### PART NUMBERING

