

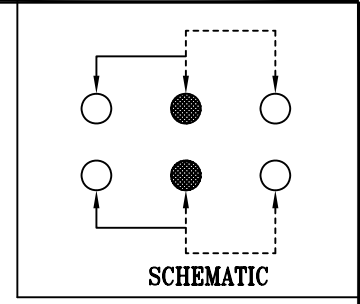


P.C.B LAYOUT

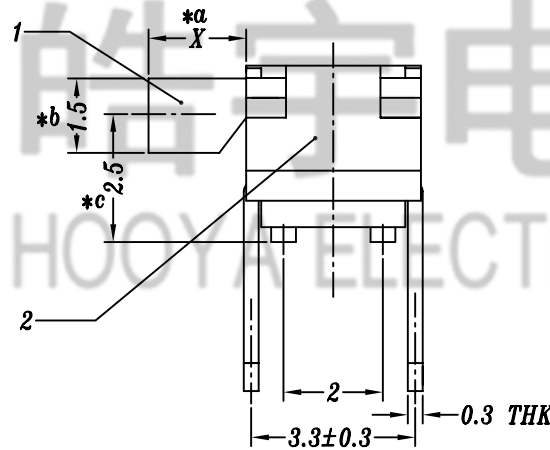

SCHEMATIC

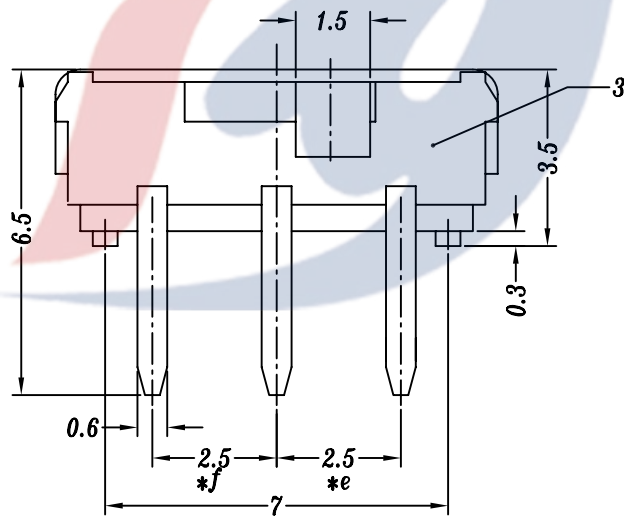

G2: 柄长2mm
B: 胶柄黑色

SPECIFICATION

1. Rating: DC 12V 0.3A
2. Travel: 2 mm
3. Function: 2P2T
4. Contact Resistance: <70mΩMAX
5. Operating Force: 130±30gf, 200±80gf
6. Life test: 10,000 cycles

?????????
1.??????
2.???????

KNOB X=2, 3, 4, 4.3, 5mm

				TOLERANCE UNLESS SPECIFIED										
				UP TO 5mm: ±0.1	ANGULAR	AO	2016.12.05	首次发行		GYW				
				ABOVE 5mm: ±0.2	±1°	NO	DATE	REVISIONS		BY APPD				
4	CONTACT/SPRING	BERYLLIUM/PBS	2	Ag PLATED/NATURAL	TITLE:MINI SLIDE SWITCH		UNIT : MM	ROHS	DWN					
3	CASE	PA6T/0.3mm BRASS STRIP	1	BLACK/Ag(Ni) PLATED	MODEL: MK-22D10G2-B 弹线		SCALE: 6:1	COMPLIANT	CHK'D					
2	COVER	0.2mm SUS	1	WASHING	HAOYU(HONGKONG)LIMITED 皓宇(香港)有限公司							APPD		
1	KNOB	PA6T/PA66	1	WHITE/BLACK								PRO.AGL:		REV :AO
NO.	PART NAME	MATERIAL	QTY	FINISHING										