

NE555

LINEAR INTEGRATED CIRCUIT

SINGLE TIMER



SOP-8



DIP-8

■ DESCRIPTION

The UTC NE555 is a highly stable timer integrated circuit. It can be operated in both Astable and Monostable mode. With monostable operation, the time delay is precisely controlled by one external and one capacitor. With a stable operation as an oscillator the frequency and duty cycle are both accurately controlled with two external resistors and one capacitor.

■ FEATURES

*High current driver capability(=200mA).
*Adjustable duty cycle.
*Timing from μs to hours.
*Turn off time less than 2μs.
*Operates in both astable and monostable modes.

■ ORDERING INFORMATION


Ordering Number			Package	Packing
Normal	Lead Free	Halogen Free		
NE555-D08-T	NE555L-D08-T	NE555G-D08-T	DIP-8	Tube
NE555-S08-R	NE555L-S08-R	NE555G-S08-R	SOP-8	Tape Reel
NE555-S08-T	NE555L-S08-T	NE555G-S08-T	SOP-8	Tube

NE555L-D08-T
(1)Packing Type
(2)Package Type
(3)Lead Plating


(1) R: Tape Reel, T: Tube
(2) D08: DIP-8, S08: SOP-8
(3) G:Halogen Free, L: Lead Free Plating, Blank: Pb/Sn

Copyright © 2010 Unisonic Technologies Co., Ltd

■ PIN CONFIGURATION

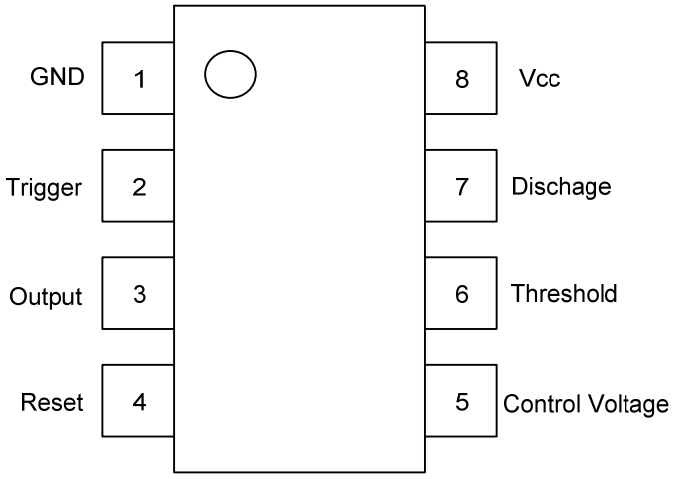

■ BLOCK DIAGRAM

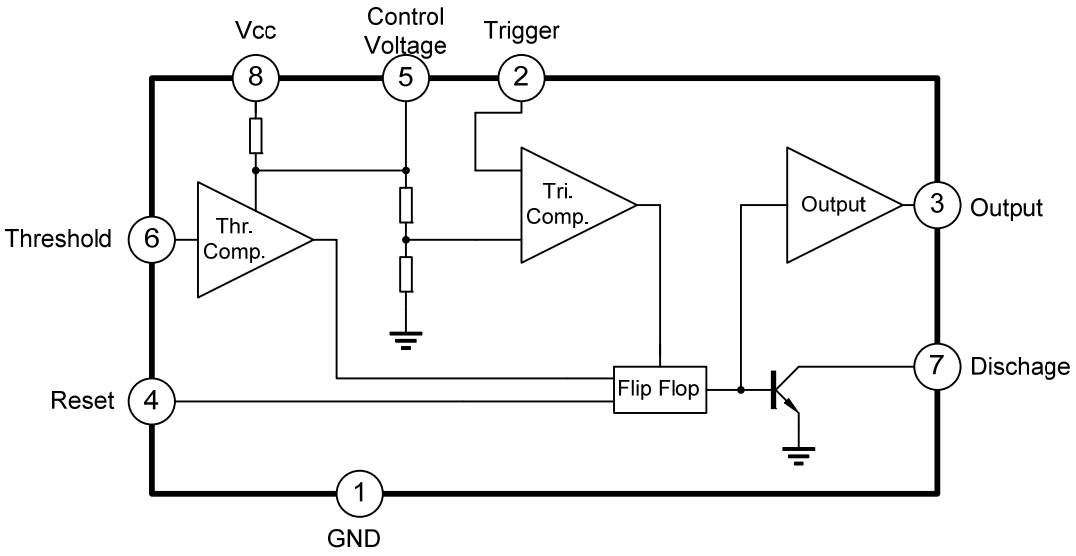

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	16	V
Power Dissipation	P_D	600	mW
Junction Temperature	T_J	+125	℃
Operating Temperature	T_{OPR}	-20 ~ +85	℃
Storage Temperature	T_{STG}	-40 ~ +150	℃

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (V_{CC}=5 ~ 15V, Ta=25℃, unless otherwise specified.)


PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage		V_{CC}		4.5		16	V
Supply Current (Note 1)		I_{CC}	V_{CC}=5V, R_L=∝		3	6	mA
			V_{CC}=15V, R_L=∝		7.5	15	mA
Initial Accurary (Note 2)	Monostable	A_{CCUR}	R_A=1k ~ 100kΩ		1.0	3.0	%
	Astable				2.25		%
Drift with Temperature	Monostable	$\Delta t/\Delta T$	C=0.1μF		50		ppm/°C
	Astable				150		ppm/°C
Drift with Supply Voltage	Monostable	$\Delta t/\Delta V_{CC}$			0.1	0.5	%/V
	Astable				0.3		%/V
Control Voltage		V_C	V_{CC}=15V	9.0	10.0	11.0	V
			V_{CC}=5V	2.6	3.33	4.0	V
Threshold Voltage		V_{TH}	V_{CC}=15V		10.0		V
			V_{CC}=5V		3.33		V
Threshold Current(Note 3)		I_{TH}			0.1	0.25	μA
Trigger Voltage		V_{TR}	V_{CC}=5V	1.1	1.67	2.2	V
			V_{CC}=15V	4.5	5	5.6	V
Trigger Current		I_{TR}	V_{TR}=0		0.01	2.0	μA
Reset Voltage		V_{RST}		0.4	0.7	1.0	V
Reset Current		I_{RST}			0.1	0.4	mA
Low Output Voltage		V_{OL}	V_{CC}=15V				
			I_{SINK}=10mA		0.06	0.25	V
			I_{SINK}=50mA		0.3	0.75	V
			V_{CC}=5V				
			I_{SINK}=5mA		0.05	0.35	V
High Output Voltage		V_{OH}	V_{CC}=15V				
			I_{SOURCE}=200mA		12.5		V
			I_{SOURCE}=100mA	12.75	13.3		V
			V_{CC}=5V, I_{SOURCE}=100mA	2.75	3.3		V
Rise Time of Output		t_R			100		ns
Fall Time of Output		t_F			100		ns
Discharge Leakage Current		I_{LKG}			20	100	nA

Note 1: Supply current when output high typically 1mA less at V_{CC}=5V.

Note 2: Tested at V_{CC}=5.0V and V_{CC}=15V.

Note 3: This will determine the maximum value of R_A+R_B for 15V operation, The maximum total is R=20MΩ, and for 5V operation the maximum total is R=6.7MΩ.

■ TYPICAL APPLICATION CIRCUIT

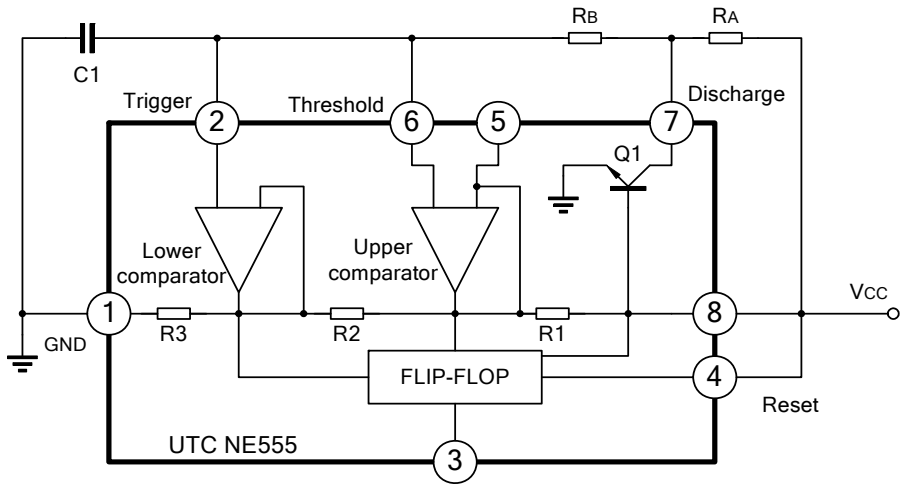

■ TYPICAL APPLICATION NOTES

The application circuit shows astable mode configuration.

Pin 6 (Threshold) is tied to Pin 2 (Trigger) and Pin 4 (reset) is tied to V_{CC} (Pin 8). The external capacitor C1 of Pin 6 and Pin 2 charges through R_A, R_B and dischages through R_B only. In the internal circuit of UTC NE555 , one input of the upper comparator is at voltage of 2/3Vcc(R1=R2=R3),another input is connected to Pin 6.As soon as C1 is charging to higher than 2/3Vcc, transistor Q1 is turned ON and discharge C1 to collector voltage of transistor Q1. Therefore, the flip-flop circuit is reset and output is low. One input of lower comparator is at voltage of 1/3Vcc, discharge transistor Q1 turn off and C1 charges through RA and RB. Therefore, the flip-flop circuit is set output high.

That is, when C1 charges through R_A and R_B , output is high and when C1 discharge through R_B ,output is low. The charge time(output is high) t1 is 0.693(R_A+R_B) C1 and the discharge time (output is low) T2 is 0.693 R_B*C1.

$$\ln\left(\frac{Vcc-\frac{1}{3}Vcc}{Vcc-\frac{2}{3}Vcc}\right)=0.693$$

$T1=0.693*(R_A+R_B)*C1$

$T2=0.693*R_B*C1$

Thus the total period time T is given by

$T=T1+T2=0.693(R_A+2R_B)*C1$.

Then the frequency of astable mode is given by


$$f=\frac{1}{T}=\frac{1.44}{(R_A+2R_B)*C1}$$

The duty cycle is given by


$$D.C.=\frac{T2}{T}=\frac{R_B}{R_A+2R_B}.$$

■ TYPICAL CHARACTERISTICS


Drop Between Supply Voltage and Output vs High-Level Output Current

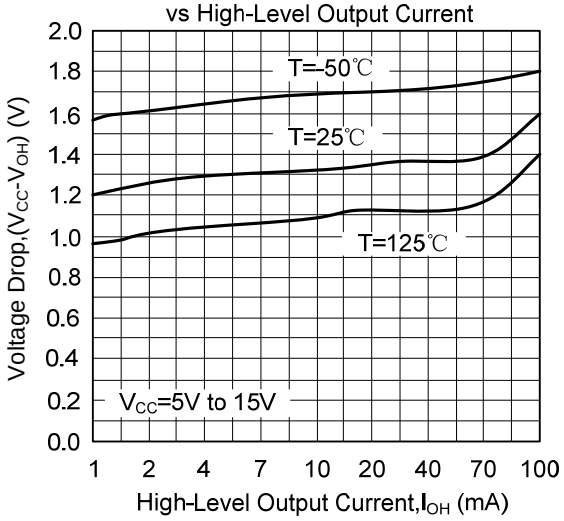


Supply Current vs Supply Voltage

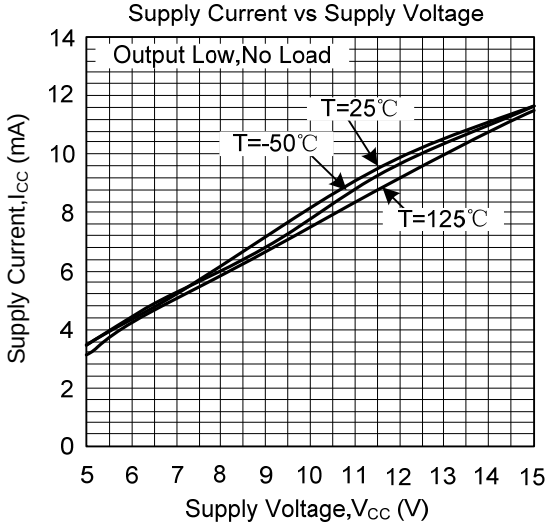


Low-Level Output Voltage vs Low-Level Output Current

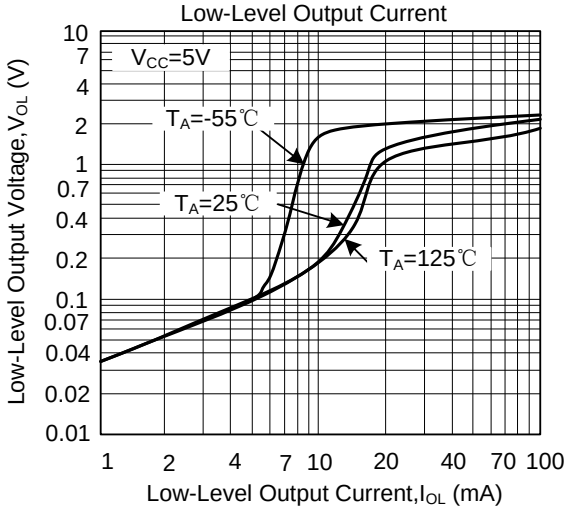

Low-Level Output Voltage vs Low-Level Output Current

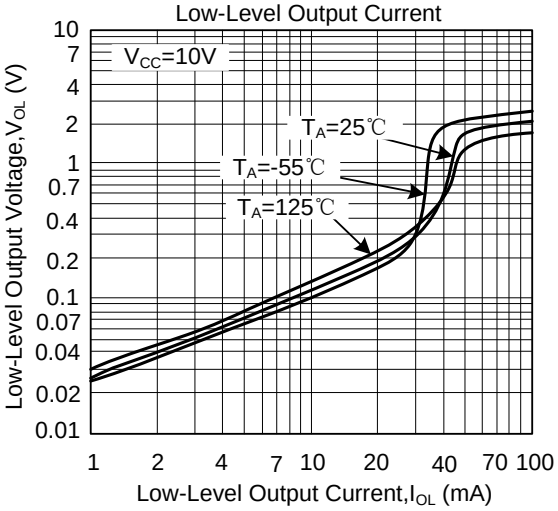

Low-Level Output Voltage vs Low-Level Output Current

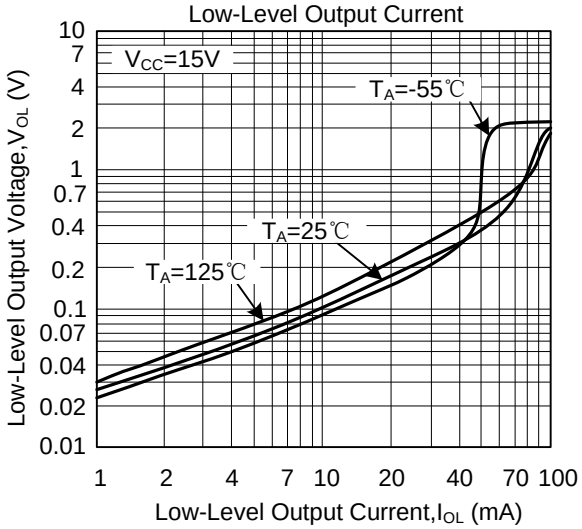

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.