
DATASHEET

SMD ▪ B

EAST16084GA3

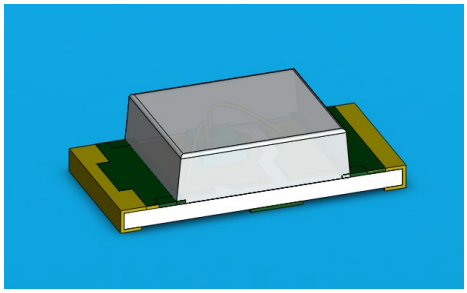

CONFIDENTIAL

Features

- Package in 8mm tape on 7″ diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).

Description

- The SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 15, 2015. Issue No: DSE-0013785 Rev.1

R
LifecyclePhase:Developing()
Expired Period: Forever

obtained.

- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Chip Materials	Emitted Color	Resin Color
AlGaInp	Brilliant Yellow Green	Water Clear

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_F	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	60	mA
Power Dissipation	Pd	60	mW
Electrostatic Discharge	ESD_{HBM}	2000	V
Operating Temperature	T_{opr}	-40 ~ +85	℃
Storage Temperature	Tstg	-40 ~ +90	℃
Soldering Temperature	T_{sol}	Reflow Soldering : 260 ℃ for 10 sec. Hand Soldering : 350 ℃ for 3 sec.	

Electro-Optical Characteristics (Ta=25℃)

CONFIDENTIAL

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 15, 2015. Issue No: DSE-0013785 Rev.1

R
LifecyclePhase:Developing()
Expired Period: Forever

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	28.5	-----	72.0	mcd	I_F=20mA
Viewing Angle	$2\theta_{1/2}$	-----	120	------	deg	
Peak Wavelength	λp	-----	575	------	nm	
Dominant Wavelength	λd	569.5	------	577.5	nm	
Spectrum Radiation Bandwidth	$\triangle\lambda$	-----	20	------	nm	
Forward Voltage	V_F	1.70	2.0	2.40	V	
Reverse Current	I_R	-----	-----	10	μA	V_R=5V

Note:

1.Tolerance of Luminous Intensity: ±11%

2.Tolerance of Dominant Wavelength ±1nm

CONFIDENTIAL

Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
N1	28.5	36.0	mcd	I_F =20mA
N2	36.0	45.0		
P1	45.0	57.0		
P2	57.0	72.0		

Bin Range Of Dom. Wavelength

	Bin Code	Min.	Max.	Unit	Condition
A	C16	569.5	571.5	nm	I_F =20mA
	C17	571.5	573.5		
	C18	573.5	575.5		

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 15, 2015. Issue No: DSE-0013785 Rev.1

R
LifecyclePhase:Developing()
Expired Period: Forever

	C19	575.5	577.5

Note:

1.Tolerance of Luminous Intensity: ±11%

2.Tolerance of Dominant Wavelength ±1nm


CONFIDENTIAL

Typical Electro-Optical Characteristics Curves


Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 15, 2015. Issue No: DSE-0013785 Rev.1

R
LifecyclePhase:Developing()
Expired Period: Forever


Spectrum Distribution

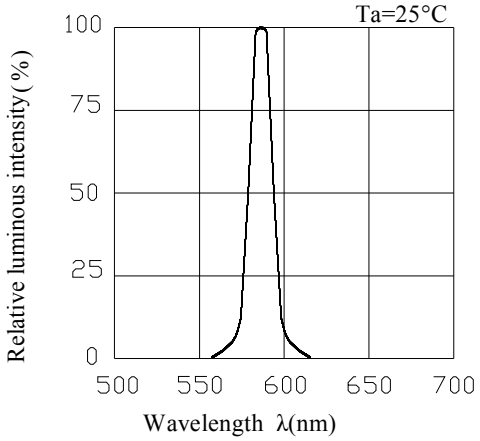


Forward Current vs. Forward Voltage

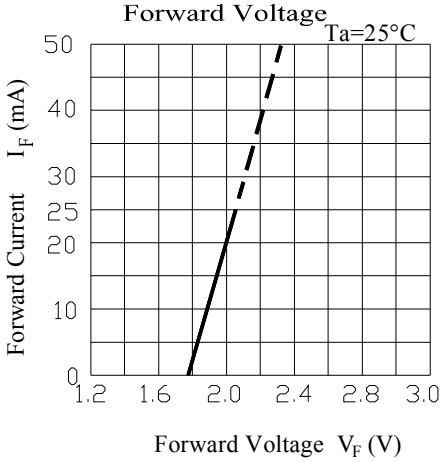


Luminous Intensity vs. Ambient Temperature

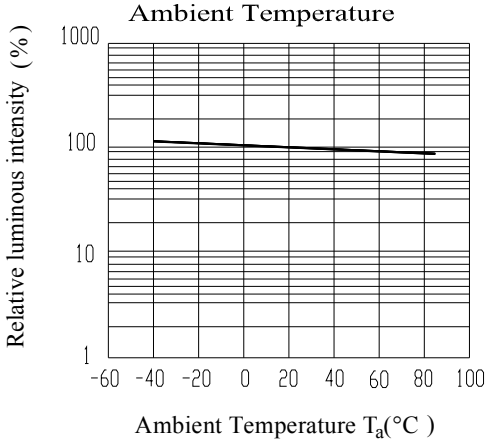


Luminous Intensity vs Forward Current

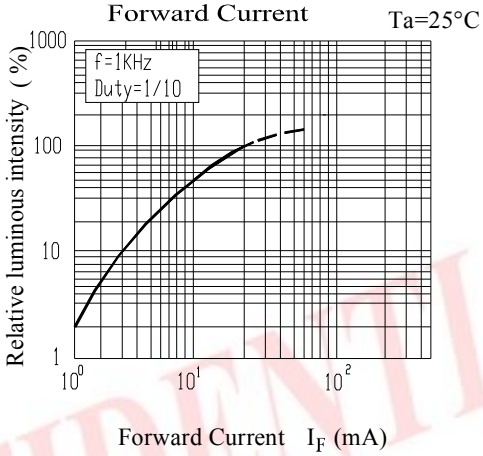

Forward Current Derating Curve

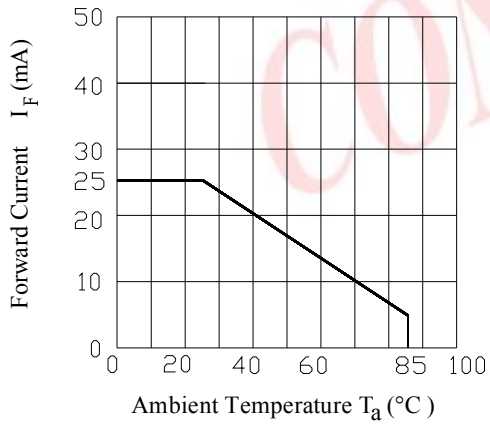

Radiation Diagram

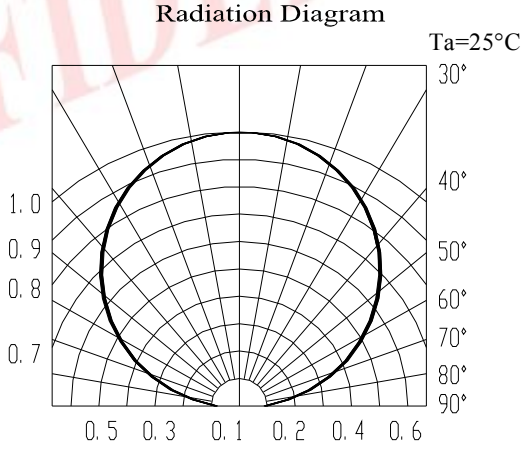


CONFIDENTIAL


Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 15, 2015. Issue No: DSE-0013785 Rev.1


LifecyclePhase:Developing() Expired Period: Forever

Package Outline Dimensions

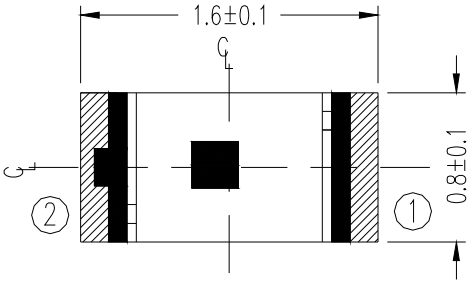


Top

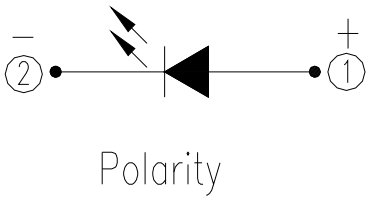

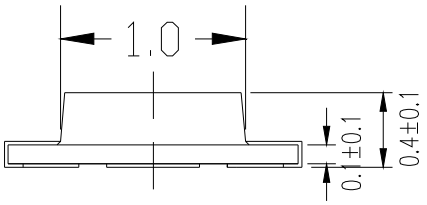


Side

Recommend Sodering Pad

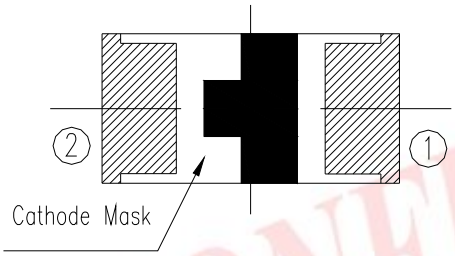

Bottom

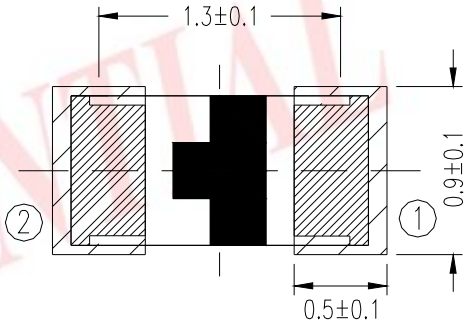

Suggested pad dimension is just for reference only.
Please modify the pad dimension based on individual need.

Note: Tolerances unless mentioned ±0.1mm. Unit = mm

CONFIDENTIAL

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 15, 2015. Issue No: DSE-0013785 Rev.1

R
LifecyclePhase:Developing()
Expired Period: Forever


Moisture Resistant Packing Materials

Label Explanation



- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number

Reel Dimensions

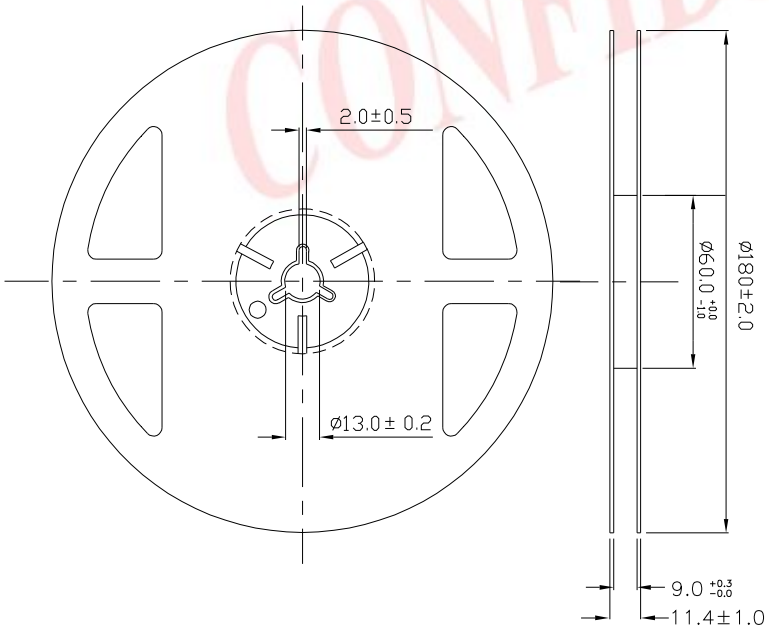


CONFIDENTIAL

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 15, 2015. Issue No: DSE-0013785 Rev.1

R
LifecyclePhase:Developing()
Expired Period: Forever

Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

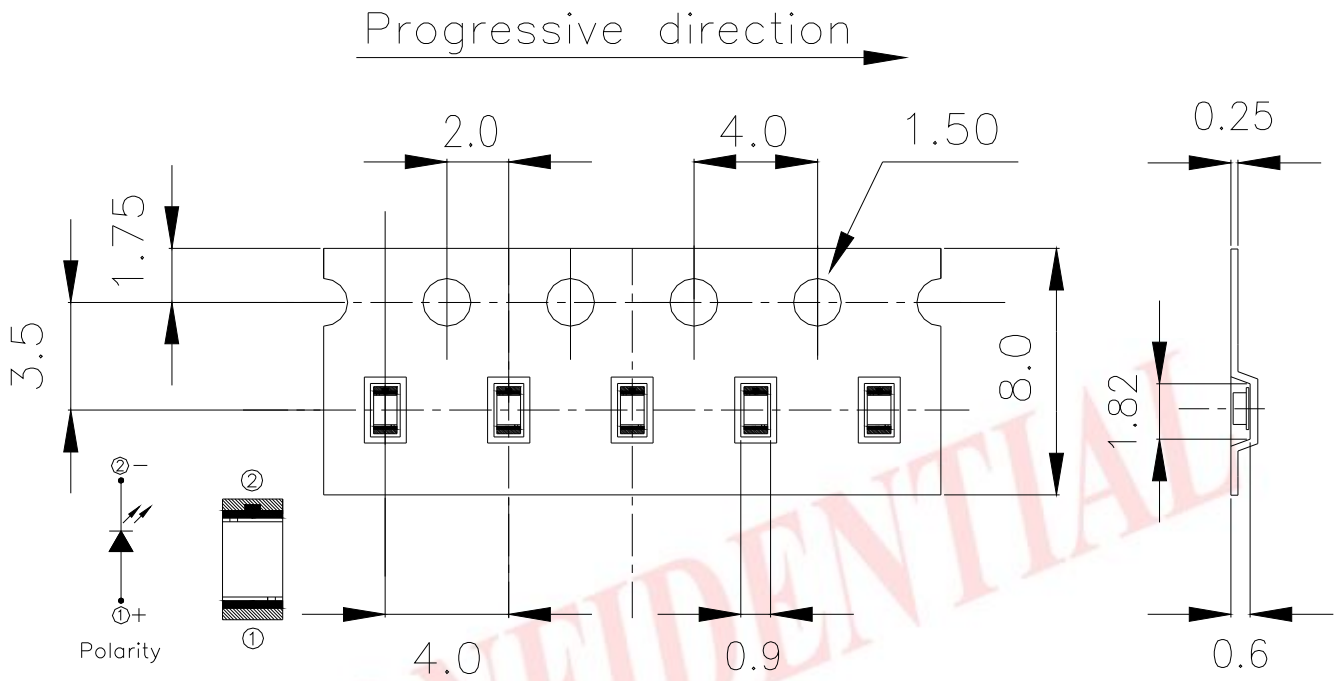


Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm

Moisture Resistant Packaging

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 15, 2015. Issue No: DSE-0013785 Rev.1

LifecyclePhase:Developing() Expired Period: Forever

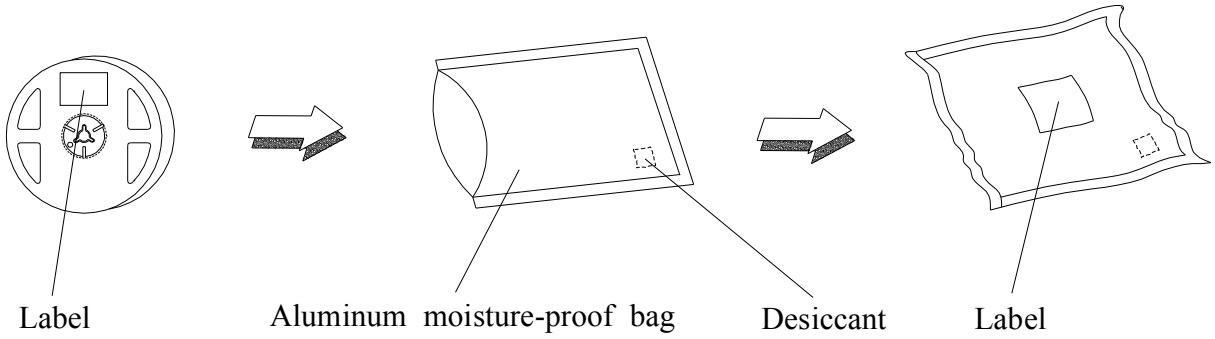

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 After opening the package: The LEDs should be kept at 30℃ or less and 60%RH or less.

2.3 The LEDs should be used within 168 hours (7days) after opening the package .


If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5℃ for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

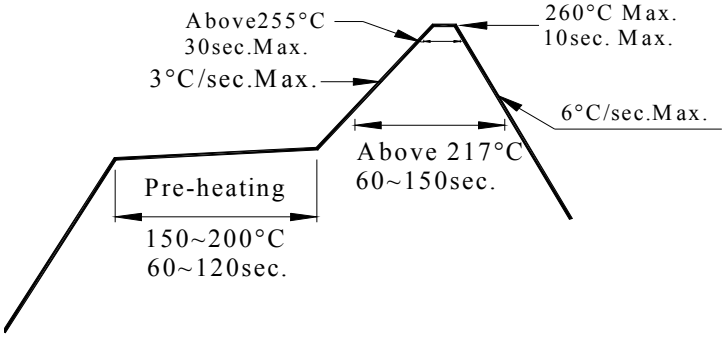

CONFIDENTIAL

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 15, 2015. Issue No: DSE-0013785 Rev.1

R
LifecyclePhase:Developing()
Expired Period: Forever

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.


3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350℃ for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

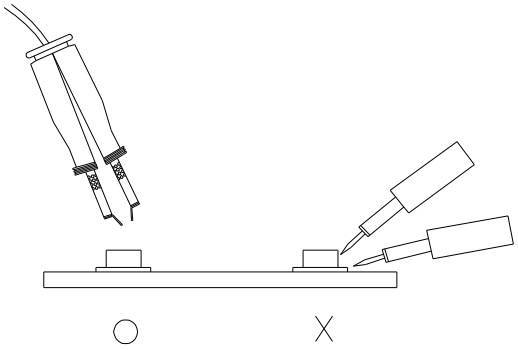

Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.

CONFIDENTIAL

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 15, 2015. Issue No: DSE-0013785 Rev.1

R
LifecyclePhase:Developing()
Expired Period: Forever