



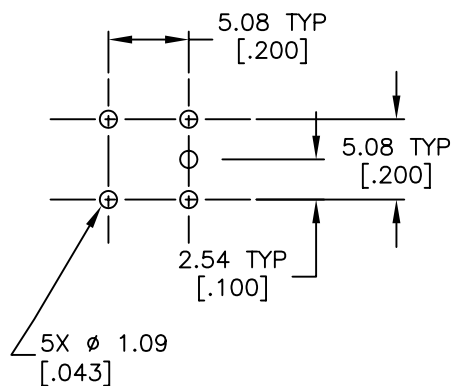


RECOMMENDED P.C.B. LAYOUT




CONTACT CONFIGURATION

SPDT

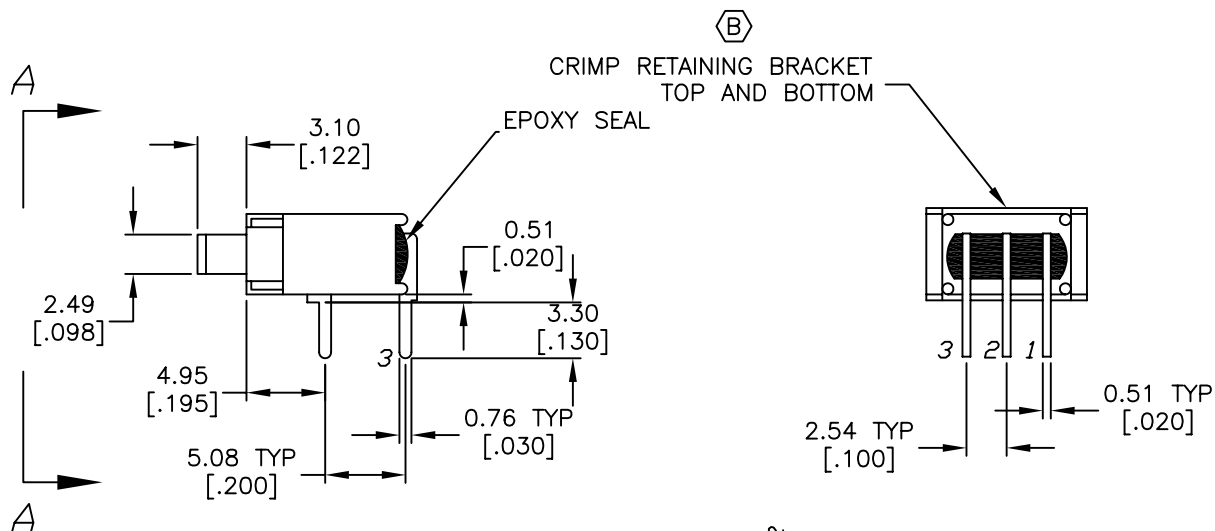

VIEW A-A

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	OFF	ON
2-1	OPEN	2-3

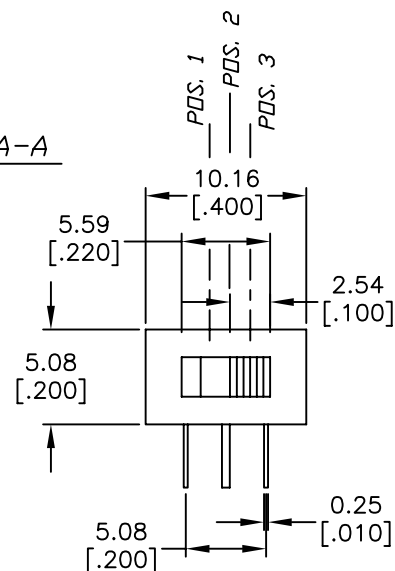

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 0.4 VA MAX @ 20 V AC OR DC MAX
- FIXED AND MOVING CONTACTS:
COPPER ALLOY W/ GOLD PLATE OVER NICKEL PLATE
- ELECTRICAL LIFE: 30,000 ACTUATIONS AT FULL LOAD
- INSULATION RESISTANCE: 1,000MΩ MIN.
- DIELECTRIC STRENGTH: 1,000V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C.
- CRIMP METAL RETAINING BRACKET (B)

E-SWITCH®

TITLE

500A SSP3 M6 R E

SCALE

2:1

DATE

10/10/01

DR

CJC

DWG

T551306

REV

B

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

B	14983	CREATED NOTES	7/5/05	JB
A	11724	RELEASED FOR PRODUCTION	10/10/01	CJC
REV.	ECN No.	DESCRIPTION	DATE	CHKD