
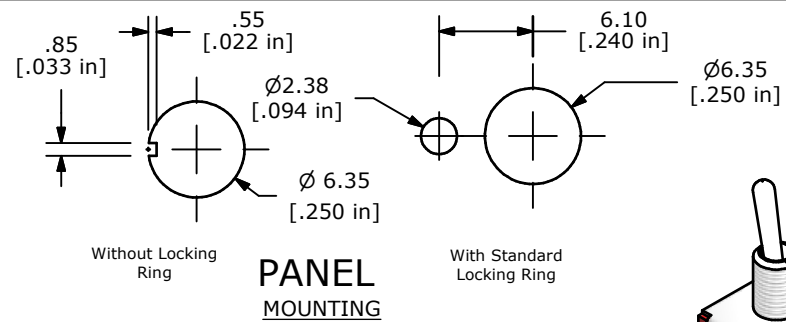
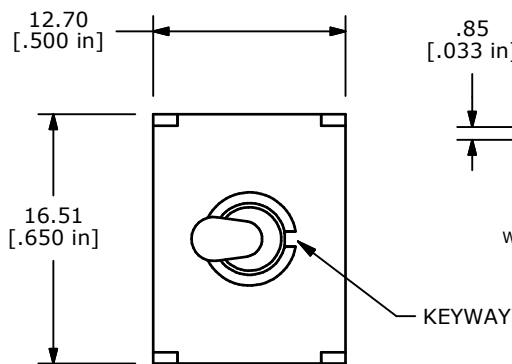
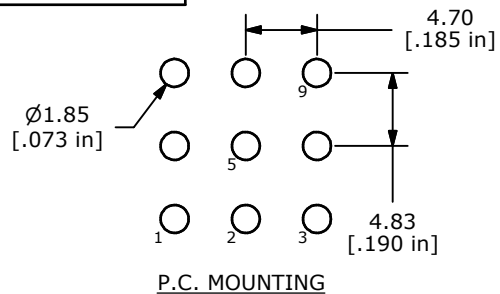


ISOMETRIC



SWITCH FUNCTION			(ON) = MOMENTARY
POS. 1	POS. 2	POS. 3	
ON	NONE	(ON)	
2-3, 5-6, 8-9	OPEN	2-1, 5-4, 8-7	

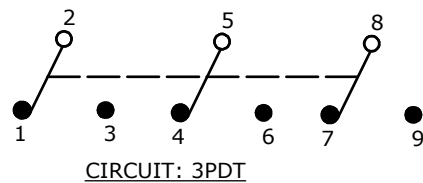

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.24
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: GOLD
- RATING: 0.4 (VA) max. @20V max. (AC or DC);
- ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
- INSULATION RESISTANCE: 1,000 Mega-ohm min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT

E-SWITCH MARKING ON OPPOSITE SIDE

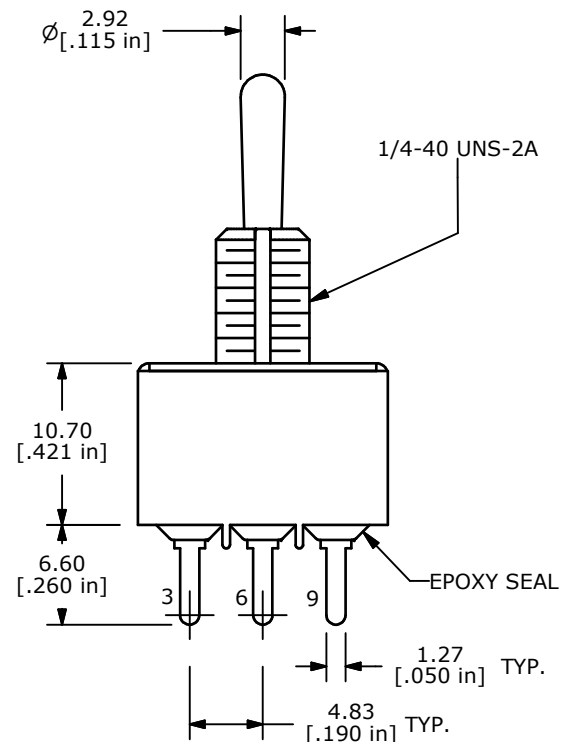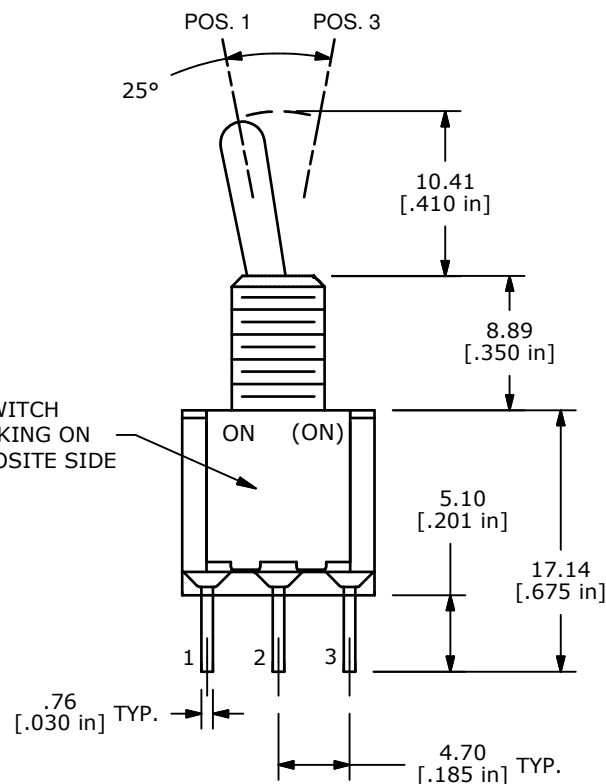

A	18114	RELEASED FOR PRODUCTION	5/27/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

TITLE 1003P2T1B1M2RE

SCALE 2:1

DATE 5/27/2008

DR BLR

DWG T131038

REV A