ROITHNER LASERTECHNIK GmbH
WIEDNER HAUPTSTRASSE 76 1040 VIENNA AUSTRIA
TEL. +43 1 586 52 43 -0, FAX. -44 OFFICE@ROITHNER-LASER.COM

rev 2.0, 03.11.2017

LED34H series

- Mid-IR LED Series
- 3.40 µm, >45 µW QCW



Description

LED34H series are fabricated from narrow band-gap InAs/InAsSbP heterostructures lattice matched to InAs substrate. This Mid-IR LEDs provide a typical peak wavelength of **3.40 µm**, an optical power of typ. **50 µW QCW**. There are different options of packaging available, as you can choose between TO-can, with parabolic reflector (R), window (W), and containing thermoelectric cooler and thermoresistor (T).

Maximum Ratings

Parameter	Symbol	Values Min.	Values Max.	Unit
Operating Current, QCW mode	$I_{QCW\ max}$		250	mA
Operating Current, pulsed mode	$I_{PULSE\ max}$		2000	mA
Storage Temperature *	I_{STR}	-60	+90	°C
Operating Temperature *	T_{CASE}	-60	+90	°C
Lead Solder Temperature *²	T_{SLD}		+180	°C

* *Temperature range may vary for different packaging types*
*² *must be completed within 5 seconds*

Photodiode Characteristics (T_{CASE}=25°C)

Parameter	Symbol	Conditions	Values Min.	Values Typ.	Values Max.	Unit
Peak Wavelength	λ_P	I_F=150mA QCW	3.30		3.44	µm
Half Width (FWHM)	$\Delta\lambda$	I_F=150mA QCW	250		600	nm
Optical Output Power, QCW *	P_O	QCW mode *	45	50		µW
Optical Output Power, pulsed *²	P_O	Pulse mode *²	350	370		µW
Operating Voltage	V_{OP}	I_F=200mA QCW	0.2		0.8	V
Switching Time	t_s					ns

* *Repetition rate: 0.5 kHz, pulse duration: 1 ms, duty cycle: 50%, current: 200 mA*
*² *Repetition rate: 0.5 kHz, pulse duration: 20 µs, duty cycle: 1%, current: 1 A*

Packages


Part Number	Package
LED34H	TO-18 with cap without glass window
LED34H-R	TO-18 with parabolic reflector without glass window
LED34H-RW	TO-18 with parabolic reflector with glass window
LED34H-TW	TO-5 with built-in thermocooler and thermoresistor, covered by cap with glass window
LED34H-TRW	TO-5 with built-in thermocooler and thermoresistor, covered by parabolic reflector with glass window

All parameters refer to LEDs in TO18 package with a cavity and operation at ambient temperature 25°C unless otherwise stated.


ROITHNER LASERTECHNIK GmbH
WIEDNER HAUPTSTRASSE 76 1040 VIENNA AUSTRIA
TEL. +43 1 586 52 43 -0, FAX. -44 OFFICE@ROITHNER-LASER.COM

Performance Characteristics


Typ. Spectra At Different Currents (QCW)

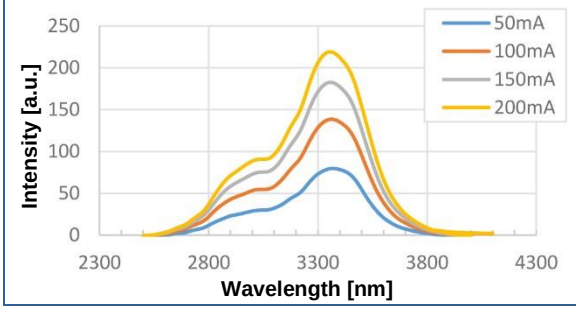


Spectra At Different Temperatures (QCW)

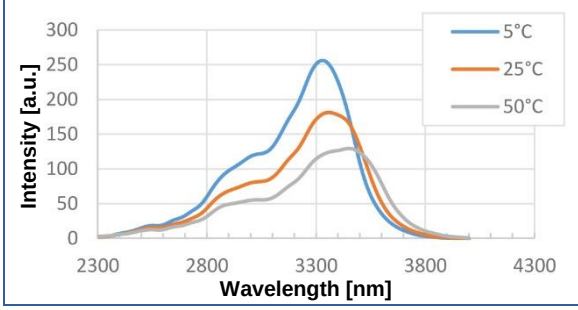

Typ. Optical Power Characteristics (QCW)

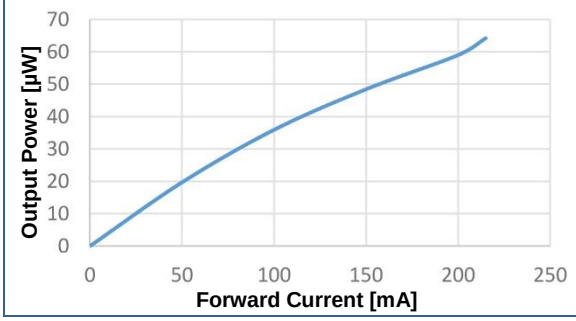


Typ. Current – Voltage Characteristics (QCW)

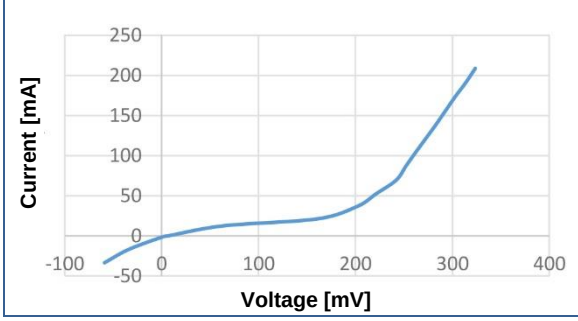


Radiant Characteristics (Far-Field Pattern)

TO-18 Package With Cap

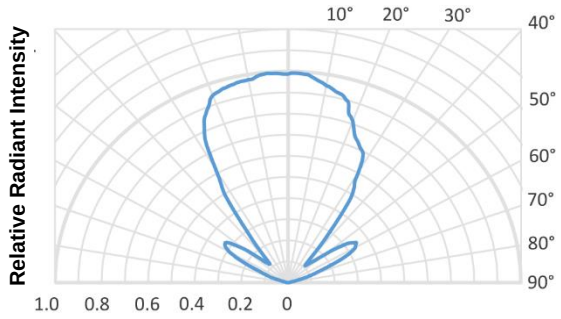


TO-18 package with Parabolic Reflector

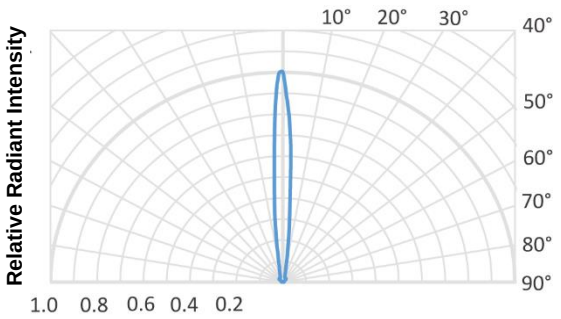

ROITHNER LASERTECHNIK GmbH
WIEDNER HAUPTSTRASSE 76 1040 VIENNA AUSTRIA
TEL. +43 1 586 52 43 -0, FAX. -44 OFFICE@ROITHNER-LASER.COM

Outline Dimensions


LED34H — **TO-18, with cap, without window**

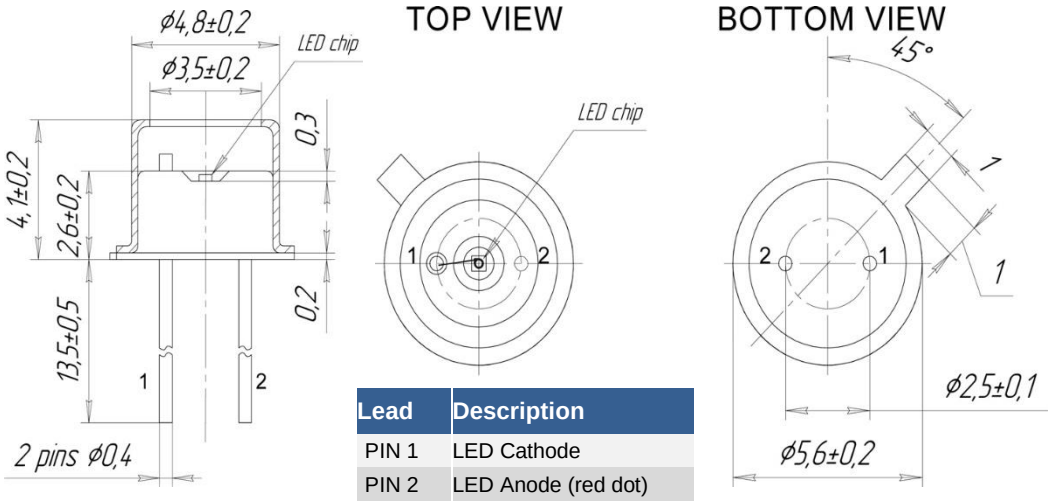

Lead	Description
PIN 1	LED Cathode
PIN 2	LED Anode (red dot)

All Dimensions in mm

LED34H-R — **TO-18, with parabolic reflector, without window**

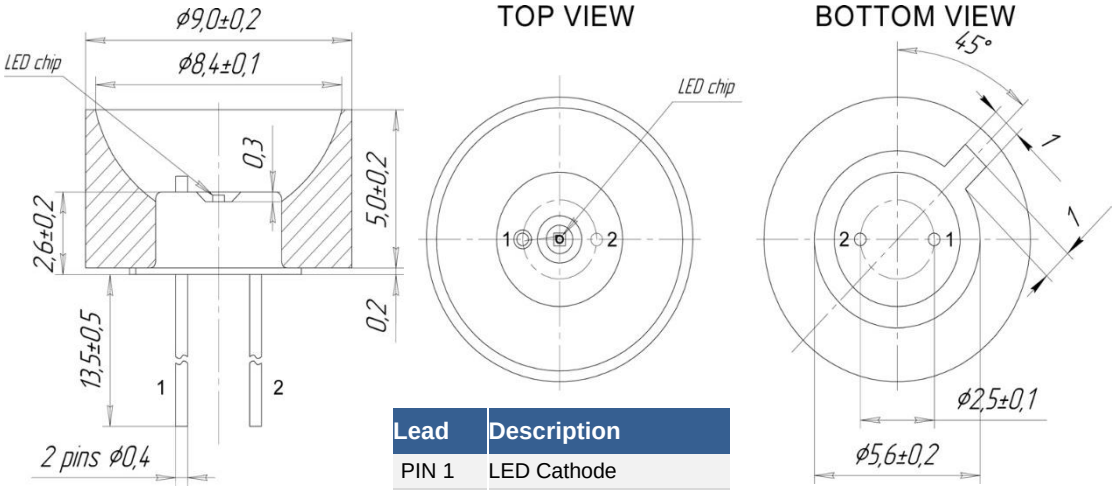


Lead	Description
PIN 1	LED Cathode
PIN 2	LED Anode (red dot)

All Dimensions in mm

ROITHNER LASERTECHNIK GmbH
WIEDNER HAUPTSTRASSE 76 1040 VIENNA AUSTRIA
TEL. +43 1 586 52 43 -0, FAX. -44 OFFICE@ROITHNER-LASER.COM


LED34H-RW — TO-18, with parabolic reflector and window

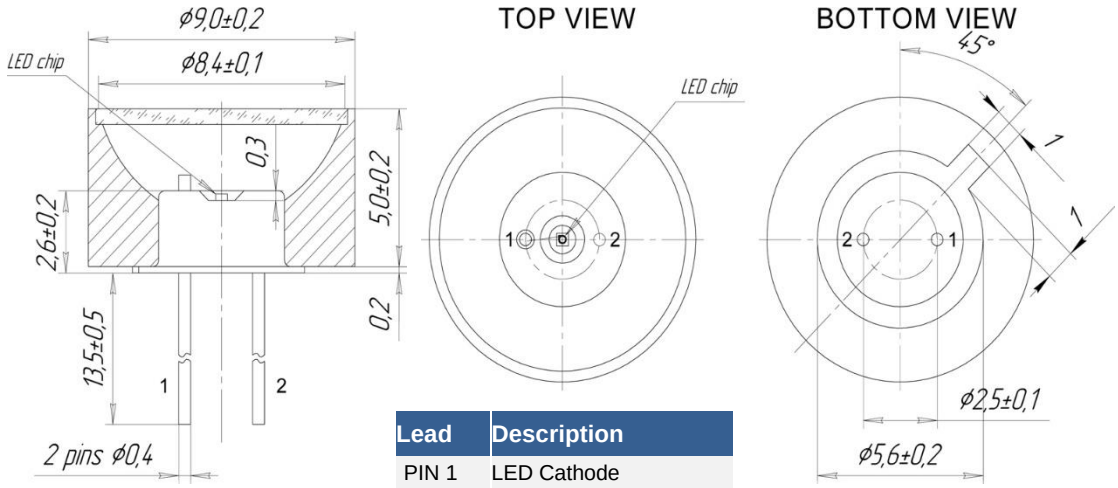

Lead	Description
PIN 1	LED Cathode
PIN 2	LED Anode (red dot)

All Dimensions in mm


LED34H-TW — TO-5, thermocooler and thermoresistor, cap and window

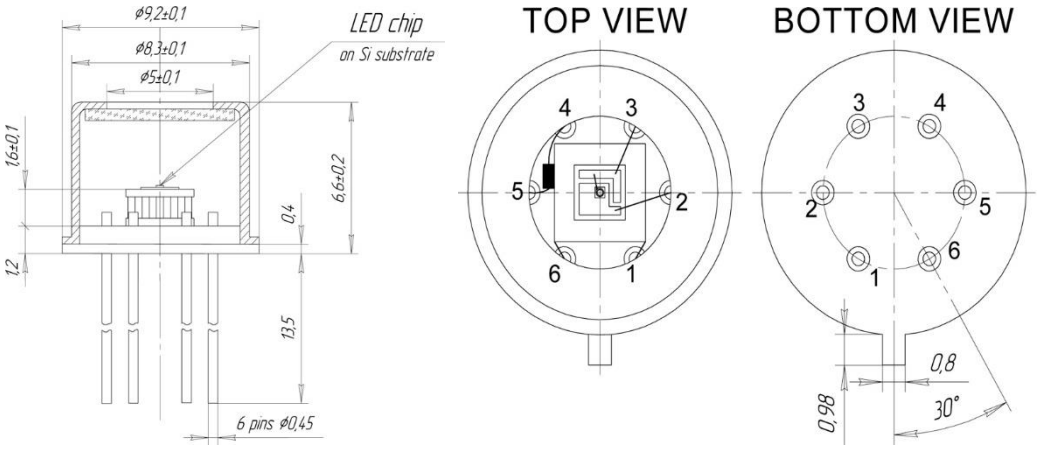

Lead	Description
PIN 1	TEC +
PIN 2	LED Anode (red dot)
PIN 3	LED Cathode
PIN 4	Thermistor
PIN 5	Thermistor
PIN 6	TEC -

All Dimensions in mm

LED34H-TRW — TO-5, thermocooler and thermoresistor, cap and window

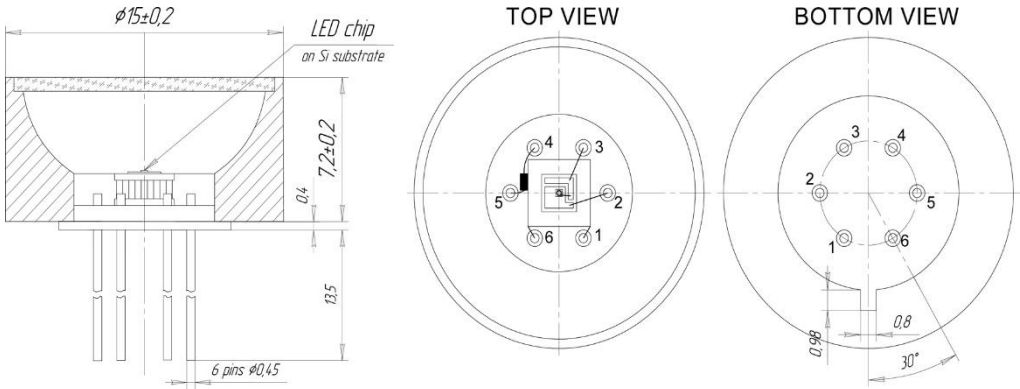


Lead	Description
PIN 1	TEC +
PIN 2	LED Anode (red dot)
PIN 3	LED Cathode
PIN 4	Thermistor
PIN 5	Thermistor
PIN 6	TEC -


All Dimensions in mm

Operating Regime

LED Basic Circuit Connection




LED With Thermoelectric Module

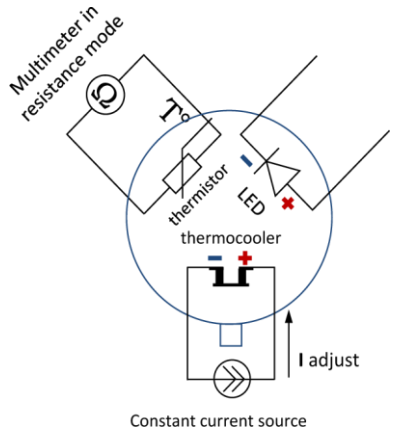


We recommend to use **Quasi Continuous Wave (QCW) mode** with duty cycle 50% or 25% to obtain maximum average optical power and **Pulse mode** to obtain maximum peak power. Hard CW (continuous wave) mode is **NOT** recommended.

Quasi Continuous Wave (QCW) mode

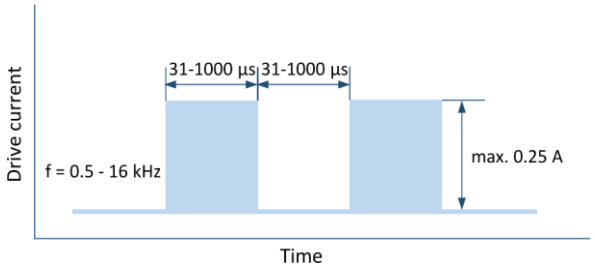

Pulse Mode

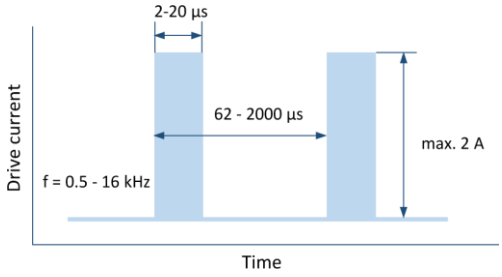

Precautions

Cautions:

- Check your connection circuits before turning on the LED.
- Mind the LED polarity: LED anode is marked with a RED dot.
  Reverse voltage applying is FORBIDDEN!
- DO NOT connect the LED to the multimeter.
- Control the current applied to the LED in order not to exceed the maximum allowable values.

Soldering:

- Do avoid overheating of the LED
- Do avoid electrostatic discharge (ESD)
- Do avoid mechanical stress, shock, and vibration
- Do only use non-corrosive flux
- Do not apply current to the LED until it has cooled down to room temperature after soldering

Static Electricity:

LEDs are **sensitive to electrostatic discharge (ESD)**. Precautions against ESD must be taken when handling or operating these LEDs. Surge voltage or electrostatic discharge can result in complete failure of the device.



Operation:

Do only operate LEDs with a current source.
Running these LEDs from a voltage source will result in complete failure of the device.
Current of a LED is an exponential function of the voltage across it. Usage of current regulated drive circuits is mandatory.

© All Rights Reserved
The above specifications are for reference purpose only and subjected to change without prior notice