



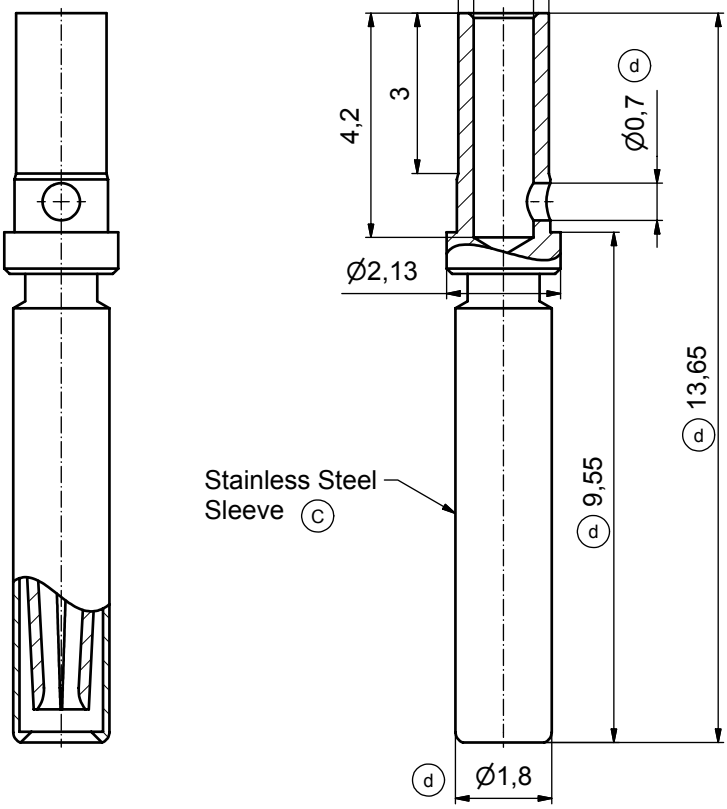

b STRIPPING DIMENSIONS

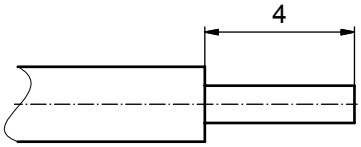

NOTES:

1. MATERIAL: COPPER ALLOY
2. PLATING: SEE TABLE
b 3. CRIMPING: USE CRIMP TOOL 360X10329X
WITH TOOL INSERT 360X20039X
SELECTOR SETTINGS: 7 FOR AWG 20
6 FOR AWG 22
5 FOR AWG 24

Plating	Part no.
min. 30µ" HARD GOLD over min. 50µ" NICKEL	**132C15019X**
min. 50µ" HARD GOLD over min. 50µ" NICKEL	**132J15019X** C

Directive 2002/95/EC „RoHS" Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
6 x d	Ä 2532	12.07.06	HS
2 x c	Ä 2193	21.03.05	Lehmen.
2 x b	Ä 2177	02.03.05	Lehmen.
a	Origin		

finish: SEE NOTES

tolerance ISO 2768-m

dim. in mm

	date	name
drawn	30.01.02	Parei
appd.	30.01.02	Mickenbecker
norm		
d-old		

scale: 10:1

material: SEE NOTES

title:

SIGNAL CRIMP CONTACT

SOCKET CONTACT

Wire Size 20-24

dwg no: Inventor 10 d DIN-A3

16K1A471A

sh: 1

part no: SEE TABLE