POWERSEM

Three Phase Full Controlled Bridges

PSDT 70

I_{dAV} = 70 A
V_{RRM} = 400-1600 V

Preliminary Data Sheet

V_{RSM} V_{DSM}	V_{RRM} V_{DRM}	Type
500	400	PSDT 70/04
900	800	PSDT 70/08
1300	1200	PSDT 70/12
1500	1400	PSDT 70/14
*1700	*1600	PSDT 70/16

* Delivery on request



Symbol	Test Conditions			Maximum Ratings	
I_{dAV}	T_C = 85 °C	per module		70	A
I_{TSM}	T_{VJ} = 45°C	t = 10 ms	(50 Hz), sine	550	A
	V_R = 0	t = 8.3 ms	(60 Hz), sine	600	A
	T_{VJ} = T_{VJM}	t = 10 ms	(50 Hz), sine	500	A
	V_R = 0	t = 8.3 ms	(60 Hz), sine	550	A
$\int i^2 dt$	T_{VJ} = 45°C	t = 10 ms	(50 Hz), sine	1520	A^2 s
	V_R = 0	t = 8.3 ms	(60 Hz), sine	1520	A^2 s
	T_{VJ} = T_{VJM}	t = 10 ms	(50 Hz), sine	1250	A^2 s
	V_R = 0	t = 8.3 ms	(60 Hz), sine	1250	A^2 s
$(di/dt)_{cr}$	T_{VJ} = T_{JVM}	repetitive, I_T = 50 A		150	A/µs
	f = 50Hz, t_P = 200µs				
	V_D = 2/3 V_{DRM}				
	I_G = 0.3 A	non repetitive, I_T =1/2 · I_{dAV}		500	A/µs
	di_G/dt = 0.3 A/µs				
$(dv/dt)_{cr}$	T_{VJ} = T_{VJM}	V_{DR} = 2/3 V_{DRM}		1000	V/µs
	R_{GK} = ∞, method 1 (linear voltage rise)				
P_{GM}	T_{VJ} = T_{VJM}	t_P = 30µs		≤ 10	W
	I_T = I_{TAVM}	t_P = 500µs		≤ 5	W
P_{GAVM}				0.5	W
V_{RGM}				10	V
T_{VJ}				-40 ... + 125	°C
T_{VJM}				125	°C
T_{stg}				-40 ... + 125	°C
V_{ISOL}	50/60 HZ, RMS	t = 1 min		2500	V ~
	I_{ISOL} ≤ 1 mA	t = 1 s		3000	V ~
M_d	Mounting torque		(M5)	2 - 2.5	Nm
Weight	typ.			100	g

Features

- Package with fast-on terminals
- Isolation voltage 3000 V~
- Planar glasspassivated chips
- Low forward voltage drop
- UL registered E 148688

Applications

- Heat and temperature control for industrial furnaces and chemical processes
- Lighting control
- Motor control
- Power converter

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability
- High power density

Package, style and outline

Dimensions in mm (1mm = 0.0394“)

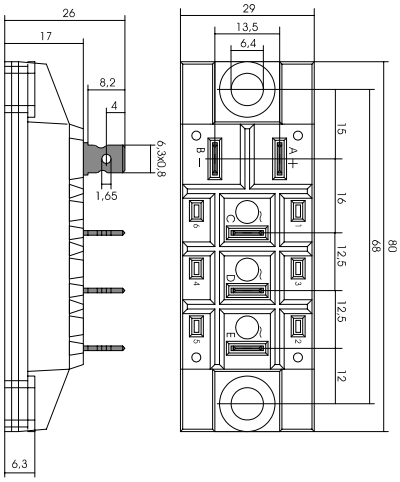

POWERSEM GmbH, Walpersdorfer Str. 53
91126 D- Schwabach
Phone: 09122 - 9764-0 Fax.: 09122 - 9764-20

© 2003 POWERSEM reserves the right to change limits, test conditions and dimensions

Symbol	Test Conditions		Characteristic Value		
I_D, I_R	$T_{VJ} = T_{VJM}$, $V_R = V_{RRM}$, $V_D = V_{DRM}$		≤	5	mA
V_T	$I_T = 80A$, $T_{VJ} = 25°C$		≤	1.64	V
V_{TO}	For power-loss calculations only ($T_{VJ} = T_{VJM}$)			0.85	V
r_T				11	mΩ
V_{GT}	$V_D = 6V$	$T_{VJ} = 25°C$	≤	1.5	V
		$T_{VJ} = -40°C$	≤	1.6	V
I_{GT}	$V_D = 6V$	$T_{VJ} = 25°C$	≤	100	mA
		$T_{VJ} = -40°C$	≤	200	mA
V_{GD}	$T_{VJ} = T_{VJM}$	$V_D = 2/3\ V_{DRM}$	≤	0.2	V
I_{GD}	$T_{VJ} = T_{VJM}$	$V_D = 2/3\ V_{DRM}$	≤	5	mA
I_L	$T_{VJ} = 25°C$, $t_P = 10\mu s$ $I_G = 0.45A$, $di_G/dt = 0.45A/\mu s$		≤	450	mA
I_H	$T_{VJ} = 25°C$, $V_D = 6V$, $R_{GK} = \infty$		≤	200	mA
t_{gd}	$T_{VJ} = 25°C$, $V_D = ½\ V_{DRM}$ $I_G = 0.45A$, $di_G/dt = 0.45A/\mu s$		≤	2	µs
t_q	$T_{VJ} = T_{VJM}$, $I_T = 20A$, $t_P = 200\mu s$, $V_R = 100V$ $-di/dt = 10A/\mu s$, $dv/dt = 15V/\mu s$, $V_D = 2/3\ V_{DRM}$			250	µs
R_{thJC}	per thyristor; sine 180°el			0.9	K/W
	per module			0.15	K/W
R_{thJK}	per thyristor; sine 180° el			1.1	K/W
	per module			0.183	K/W
d_S	Creeping distance on surface			16.0	mm
d_A	Creeping distance in air			7.6	mm
a	Max. allowable acceleration			50	m/s^2

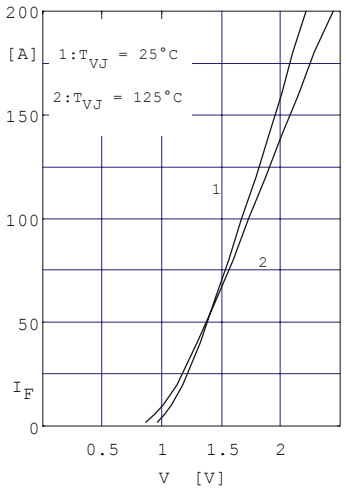

Fig. 1 Forward current vs. voltage drop per diode or thyristor

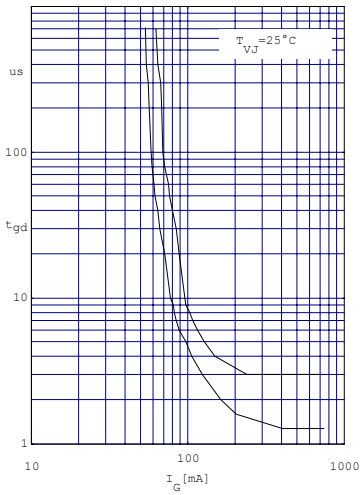

Fig. 2 Gate trigger delay time

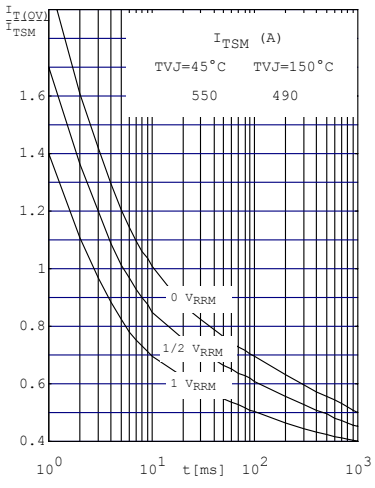

Fig. 3 Surge overload current per diode (or thyristor) I_{FSM}, I_{TSM}: Crest value t: duration

POWERSEM GmbH, Walpersdorfer Str. 53
91126 D- Schwabach
Phone: 09122 - 9764-0 Fax.: 09122 - 9764-20

© 2003 POWERSEM reserves the right to change limits, test conditions and dimensions

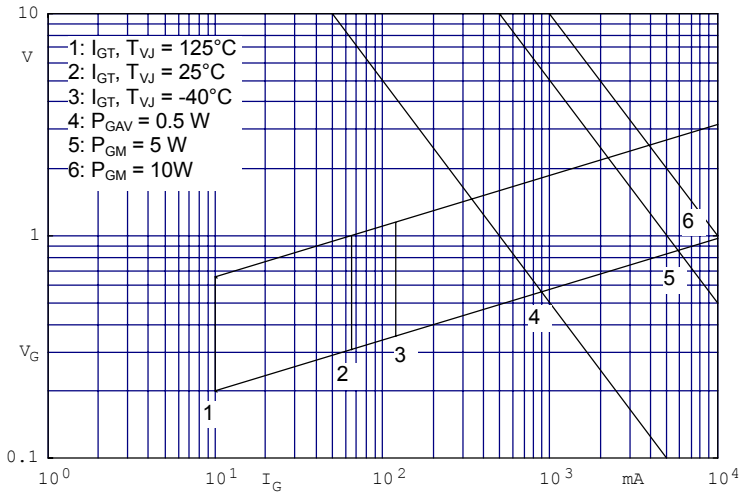

Fig.4 Gate trigger characteristic

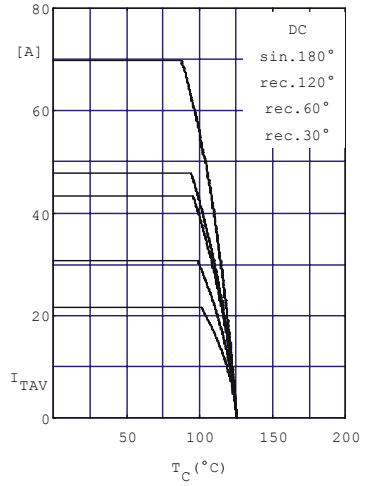

Fig.5 Maximum forward current at case temperature

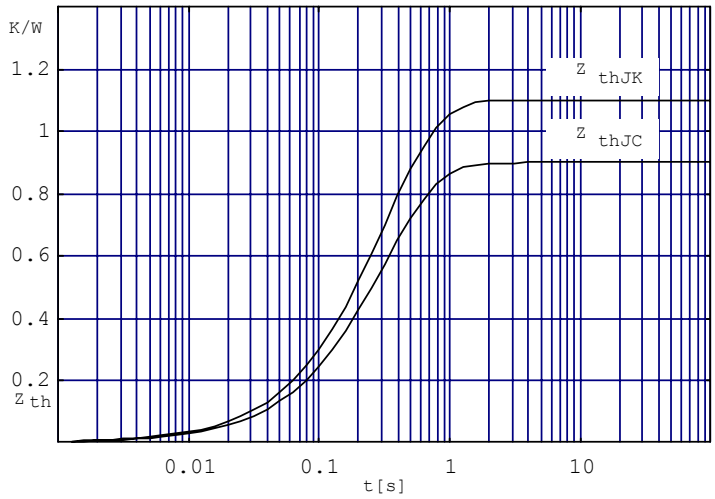

Fig.6 Transient thermal impedance per thyristor or diode

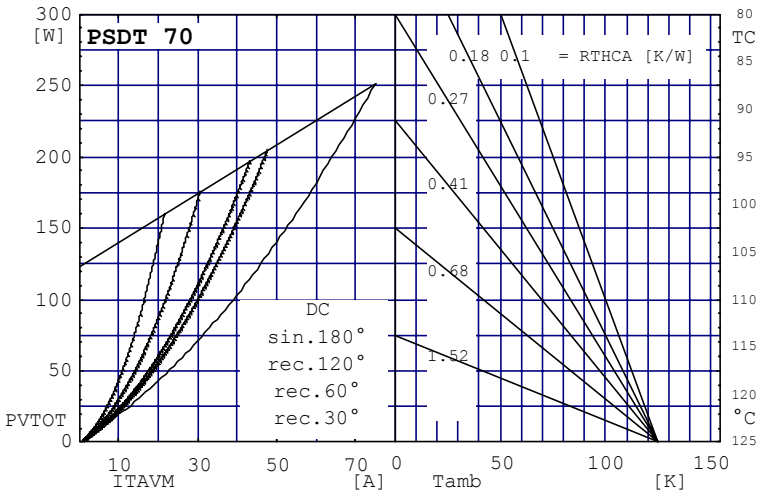

Fig. 7 Power dissipation vs. direct output current and ambient temperature

POWERSEM GmbH, Walpersdorfer Str. 53
91126 D- Schwabach
Phone: 09122 - 9764-0 Fax.: 09122 - 9764-20

© 2003 POWERSEM reserves the right to change limits, test conditions and dimensions