

RoHS Compliant Product
A suffix of "-C" specifies halogen-free and RoHS Compliant


FEATURES

- Ideal for surface mount applications
- Easy pick and place
- Built-in strain relief
- Low forward voltage drop

PACKAGING INFORMATION

- Metallurgically bonded construction
- Polarity: Color band denotes cathode end
- Case: Molded plastic
- Epoxy: UL94-V0 rate flame retardant
- Weight: 0.032 grams (approximately)

SMAF

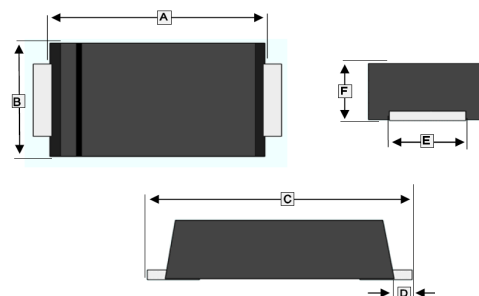

PACKAGE INFORMATION

Package	MPQ	Leader Size
SMAF	3K	7 inch

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	3.95	4.60	D	0.75	1.50
B	2.25	2.95	E	1.25	1.65
C	4.80	5.60	F	0.90	1.10

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)

Parameter		Symbol	Part Number						Unit
			SM 120AF	SM 140AF	SM 160AF	SM 1100AF	SM 1150AF	SM 1200AF	
Maximum Recurrent Peak Reverse Voltage		V _{RRM}	20	40	60	100	150	200	V
Working Peak Reverse Voltage		V _{RMS}	14	28	42	70	105	140	V
Maximum DC Blocking Voltage		V _R	20	40	60	100	150	200	V
Maximum Instantaneous Forward Voltage @ 1A		V _F	0.45	0.5	0.7	0.85	0.87	0.9	V
Maximum Average Forward Rectified Current, See Fig.1		I _O	1						A
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I _{FSM}	30						A
Maximum Reverse Current ²	T _C =25°C	I _R	0.5			0.2			mA
	T _C =100°C		10			5			
Typical Thermal Resistance		R _{θJA}	120						℃ / W
Typical Thermal Resistance		R _{θJC}	90						
Diode Junction Capacitance (Typ.) ¹		C _J	90	70	60	50	35		pF
Operating Temperature Range		T _J	-50 ~ 125				-50~150		℃
Storage Temperature Range		T _{STG}	-50~150						℃

Note:

1. $f=1\text{MHz}$ and applied 4V DC reverse voltage
2. Pulse Test : Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.

RATINGS AND CHARACTERISTIC CURVES

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

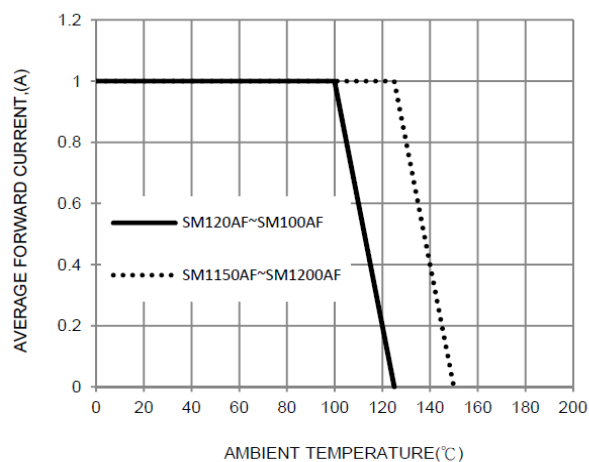


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

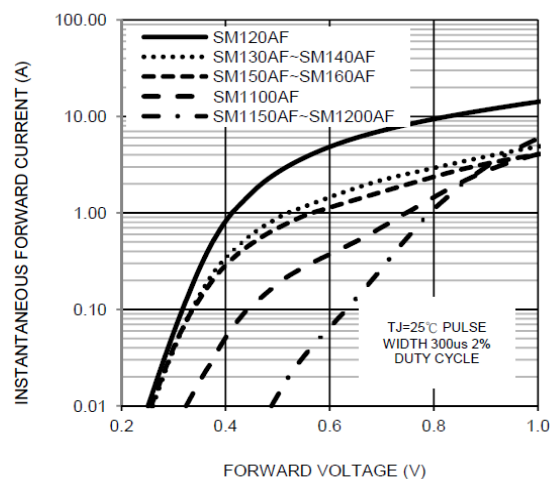


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

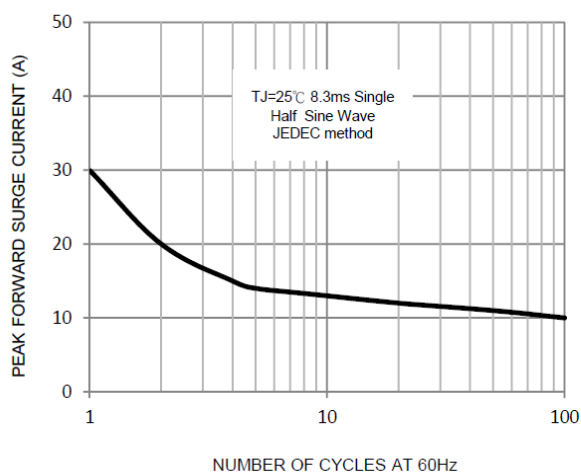


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

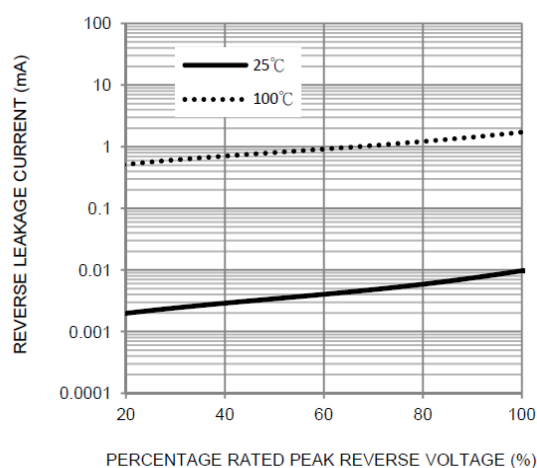


FIG. 5-TYPICAL JUNCTION CAPACITANCE

