



Features

- ✧ For IF SAW filter
- ✧ High attenuation
- ✧ Single-ended operation
- ✧ Dual In-line Package
- ✧ No matching required for operation at 50Ω
- ✧ RoHS compliant (2002/95/EC), Pb-free

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	106.8	107	107.2
Insertion Loss	dB	-	24	25
1.5 dB Bandwidth	MHz	20	20.45	-
20 dB Bandwidth	MHz	-	21.78	21.8
40 dB Bandwidth	MHz	-	22.27	-
50 dB Bandwidth	MHz	-	22.45	23
Passband Variation	dB	-	0.8	1
Absolute Delay	usec	-	1.75	2.5
Ultimate Rejection(f0±MHz)	dB	50	55	-
Material Temperature coefficient	KHz/°C	-8.77		
Substrate Material	-	128LN		
Ambient Temperature	°C	25		
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-45	-	+105
DC Voltage	V	0		
Input Power	dBm	-	-	10
ESD Class	-	1A		
Package Size	DIP2212 (22.2x12.8x4.7mm3)			

Notes:

- All specifications are based on the test circuit shown;
- In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
- Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
- This is the optimum impedance in order to achieve the performance show.



SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBN10706		
Rev. Date	2008-08-01		
Ver.	1.0	Page 1/3	

Matching Configuration

INPUT
50 Ω




OUTPUT
50 Ω

Source / Load Impedance = 50 ohm

Notes - Component values may change depending
on board layout.

Package Dimension

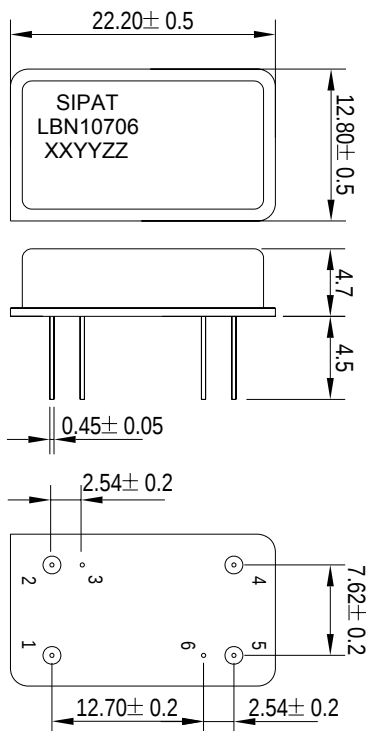

Pad Configuration:

Input 1
Output 5
Ground All Others

Marking Configuration:

- 1) SIPAT: Manufacturer Name
- 2) LBN10706: Part Number
- 3) XXYY: Date(Year/month)
- 4) ZZ: Identified Code

Package: DIP2212

Unit: mm



SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number

LBN10706

Rev. Date

2008-08-01

Ver.


1.0

Page 2/3



Typical Performance


Frequency Respond

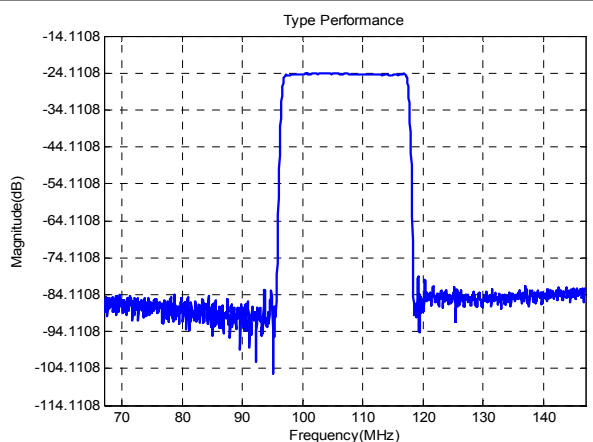

Horizontal: 10MHz/Div

Vertical: 10dB/Div


Passband Respond

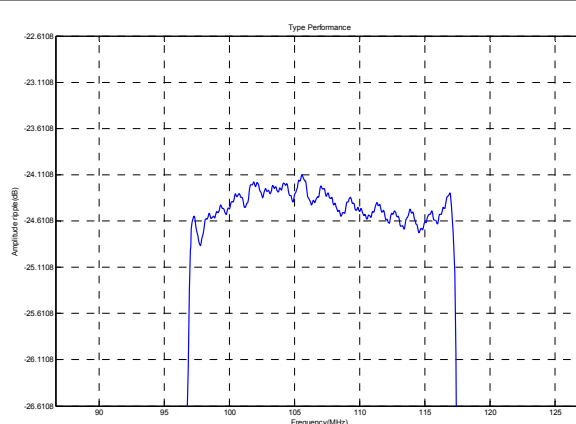

Horizontal: 5MHz/Div

Vertical: 0.5dB/Div


Group Delay Variation($f_0 \pm 10\text{MHz}$)

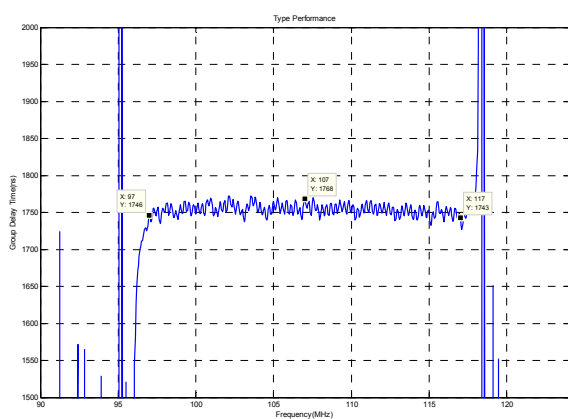

Horizontal: 5MHz/Div

Vertical: 50ns/Div


Phase Linearity($f_0 \pm 10\text{MHz}$)

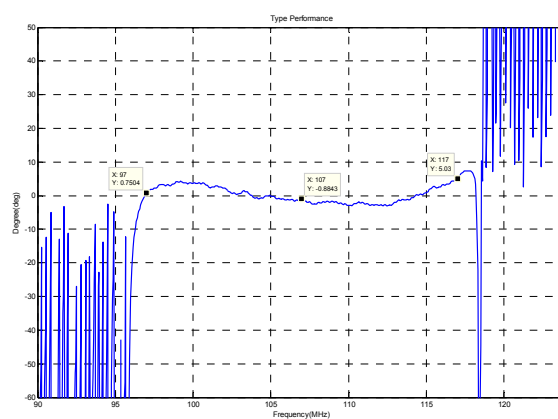


Horizontal: 5MHz/Div

Vertical: 10deg/Div

Smith Chart S11

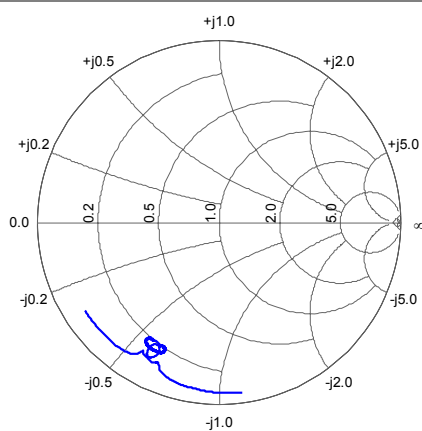

Smith Chart S22

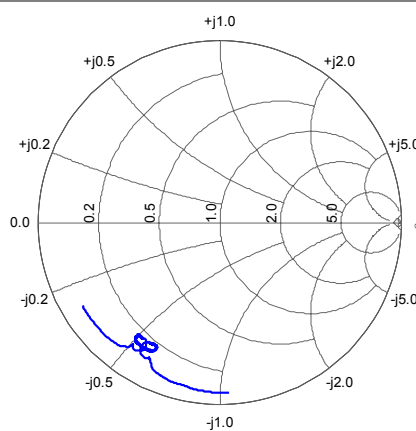

SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number

LBN10706

Rev. Date

2008-08-01

Ver.

1.0

Page 3/3