


# 5.0-20.0 GHz GaAs MMIC Low Noise Amplifier

April 2007 - Rev 19-Apr-07

## Features

- X Wideband Low Noise Amplifier
- X 13.0 dB Small Signal Gain
- X 2.2 dB Noise Figure
- X 100% On-Wafer RF, DC and Noise Figure Testing
- X 100% Visual Inspection to MIL-STD-883 Method 2010

## Chip Device Layout

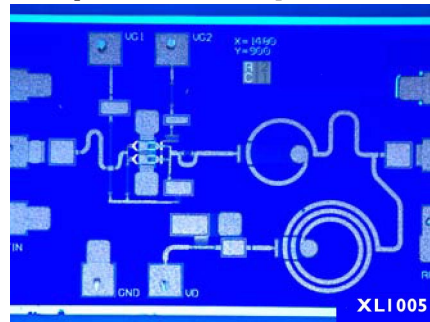

## General Description

Mimix Broadband's single stage 5.0-20.0 GHz GaAs MMIC low noise amplifier has a small signal gain of 13.0 dB with a noise figure of 2.2 dB across the band. This MMIC uses Mimix Broadband's 0.15  $\mu\text{m}$  GaAs PHEMT device model technology, and is based upon electron beam lithography to ensure high repeatability and uniformity. The chip has surface passivation to protect and provide a rugged part with backside via holes and gold metallization to allow either a conductive epoxy or eutectic solder die attach process. This device is well suited for Millimeter-wave Point-to-Point Radio, LMDS, SATCOM and VSAT applications.

## Absolute Maximum Ratings

Supply Voltage (Vd1)	+5.5 VDC
Supply Current (Id)	120 mA
Gate Bias Voltage (Vg1)	+0.3 VDC
Gate Bias Voltage (Vg2)	TBD
Input Power (Pin)	+15.0 dBm
Storage Temperature (Tstg)	-65 to +165 °C
Operating Temperature (Ta)	-55 to MTTF Table <sup>1</sup>
Channel Temperature (Tch)	MTTF Table <sup>1</sup>

(1) Channel temperature affects a device's MTBF. It is recommended to keep channel temperature as low as possible for maximum life.

## Electrical Characteristics (Ambient Temperature T = 25 °C)





Parameter	Units	Min.	Typ.	Max.
Frequency Range (f)	GHz	5.0	-	20.0
Input Return Loss (S11)	dB	-	7.0	-
Output Return Loss (S22)	dB	-	14.0	-
Small Signal Gain (S21)	dB	-	13.0	-
Gain Flatness ( $\Delta S21$ )	dB	-	+/-2.0	-
Reverse Isolation (S12)	dB	-	TBD	-
Noise Figure (NF)	dB	-	2.2	-
Output Power for 1 dB Compression (P1dB)	dBm	-	+16.0	-
Output Third Order Intercept Point (OIP3)	dBm	-	+26.0	-
Drain Bias Voltage (Vd)	VDC	-	+5.0	-
Gate Bias Voltage (Vg1)	VDC	-	-0.3	-
Gate Bias Voltage (Vg2)	VDC	-	+1.5	-
Supply Current (Id) (Vd=5.0V, Vg1=-0.3V, Vg2=1.5V)	mA	-	30	-

# 5.0-20.0 GHz GaAs MMIC Low Noise Amplifier


April 2007 - Rev I9-Apr-07

## Low Noise Measurements

Measured performance characteristics (Typical at 25°C)  
Vd= 5V, Id = 30 mA

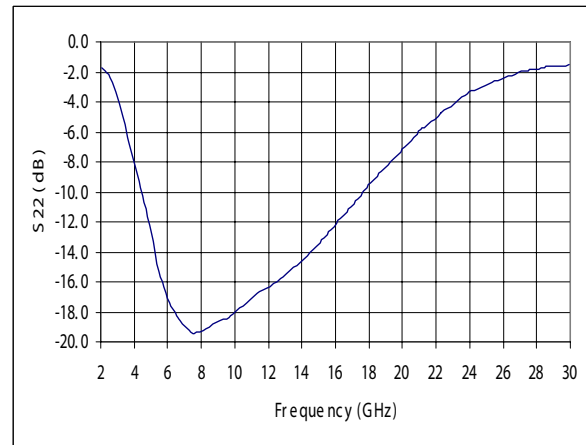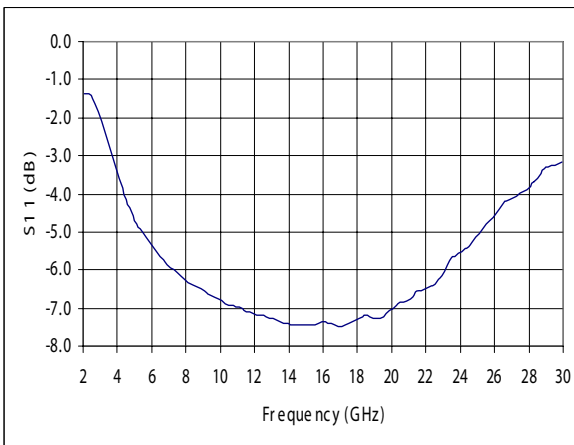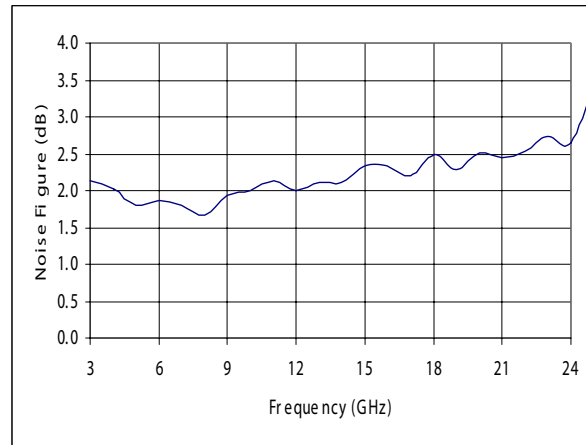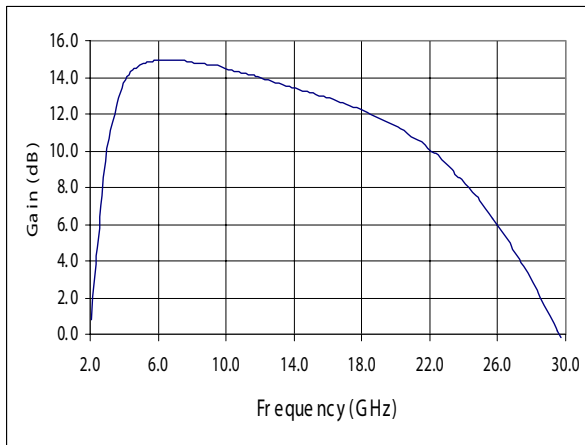

# 5.0-20.0 GHz GaAs MMIC Low Noise Amplifier



April 2007 - Rev 19-Apr-07

## S-Parameters


Measured performance characteristics (Typical at 25°C)  
Vd= 5 V, Id= 30 mA

Freq GHz	S11 Mag	S11 Ang	S21 Mag	S21 Ang	S12 Mag	S12 Ang	S22 Mag	S22 Ang
2.00	0.86	-20.74	0.87	-160.26	0.01	38.24	0.83	-96.64
2.50	0.86	-31.18	1.72	-119.13	0.02	81.44	0.78	-128.11
3.00	0.80	-40.24	3.06	-131.00	0.04	71.03	0.66	-158.76
3.50	0.74	-46.44	3.95	-148.65	0.05	55.56	0.51	175.07
4.00	0.68	-51.73	4.66	-163.37	0.06	42.52	0.40	147.51
4.50	0.63	-55.37	5.06	-177.00	0.07	31.12	0.31	122.19
5.00	0.59	-57.81	5.27	169.79	0.07	20.23	0.23	95.34
5.50	0.57	-60.85	5.32	160.26	0.07	12.38	0.17	75.98
6.00	0.55	-63.14	5.36	150.33	0.07	5.20	0.13	48.14
6.50	0.54	-66.41	5.42	141.65	0.08	-1.60	0.12	21.59
7.00	0.52	-68.42	5.35	133.67	0.08	-7.68	0.11	-4.02
7.50	0.51	-70.96	5.39	125.33	0.08	-13.98	0.11	-29.07
8.00	0.50	-73.36	5.31	117.97	0.08	-19.37	0.12	-50.95
8.50	0.49	-76.87	5.28	111.35	0.08	-25.02	0.13	-70.45
9.00	0.49	-78.91	5.19	103.81	0.08	-29.56	0.14	-84.13
9.50	0.48	-82.06	5.14	97.63	0.08	-35.36	0.14	-99.54
10.00	0.48	-84.95	5.08	90.63	0.08	-39.71	0.15	-111.83
10.50	0.47	-87.78	4.96	84.18	0.08	-44.76	0.16	-123.92
11.00	0.47	-90.85	4.97	78.10	0.08	-49.17	0.17	-136.68
11.50	0.46	-93.43	4.84	71.63	0.08	-54.13	0.17	-146.03
12.00	0.46	-96.53	4.79	65.70	0.08	-58.73	0.18	-158.09
12.50	0.46	-99.67	4.71	59.71	0.08	-63.43	0.18	-169.23
13.00	0.46	-102.25	4.64	53.43	0.08	-68.21	0.19	-179.99
13.50	0.45	-105.86	4.55	48.19	0.08	-72.32	0.20	170.60
14.00	0.45	-107.89	4.49	41.67	0.08	-77.85	0.21	160.50
14.50	0.45	-111.68	4.40	36.48	0.08	-81.81	0.22	150.13
15.00	0.44	-113.55	4.35	29.99	0.07	-86.97	0.23	139.73
15.50	0.45	-116.91	4.28	24.36	0.07	-91.29	0.24	128.88
16.00	0.45	-119.43	4.21	18.40	0.07	-95.68	0.26	119.59
16.50	0.45	-122.93	4.16	11.70	0.07	-100.77	0.28	109.92
17.00	0.44	-124.91	4.05	6.67	0.07	-104.80	0.29	99.58
17.50	0.45	-127.98	4.00	-0.40	0.07	-110.37	0.32	89.96
18.00	0.45	-130.77	3.88	-5.68	0.07	-114.78	0.34	80.38
18.50	0.46	-131.59	3.83	-12.80	0.07	-120.70	0.36	70.33
19.00	0.46	-134.41	3.71	-18.35	0.07	-125.57	0.39	61.31
19.50	0.45	-136.81	3.63	-25.53	0.06	-131.41	0.41	52.19
20.00	0.46	-138.83	3.51	-31.60	0.06	-136.73	0.44	43.34
20.50	0.47	-140.67	3.39	-37.86	0.06	-142.65	0.47	34.72
21.00	0.47	-143.13	3.28	-44.81	0.06	-147.03	0.50	26.11
21.50	0.48	-144.66	3.15	-50.91	0.05	-152.66	0.53	18.06
22.00	0.49	-146.27	3.03	-58.29	0.05	-157.20	0.56	9.05

# 5.0-20.0 GHz GaAs MMIC Low Noise Amplifier

April 2007 - Rev 19-Apr-07

## Mechanical Drawing

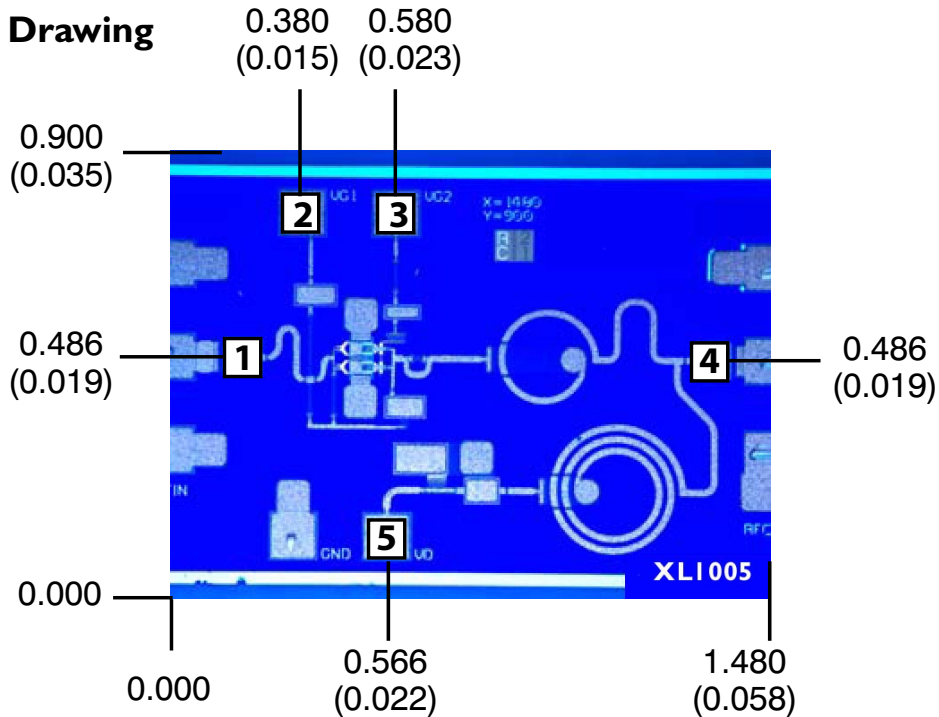


Units: millimeters (inches) Bond pad dimensions are shown to center of bond pad.  
 Thickness: 0.110 +/- 0.010 (0.0043 +/- 0.0004), Backside is ground, Bond Pad/Backside Metallization: Gold  
 All Bond Pads are 0.100 x 0.100 (0.004 x 0.004).

Bond pad centers are approximately 0.109 (0.004) from the edge of the chip.  
 Dicing tolerance: +/- 0.005 (+/- 0.0002). Approximate weight: 1.239 mg.

Bond Pad #1 (RF In)    Bond Pad #2 (Vg1)    Bond Pad #3 (Vg2)    Bond Pad #4 (RF Out)    Bond Pad #5 (Vd)

## Bias Arrangement

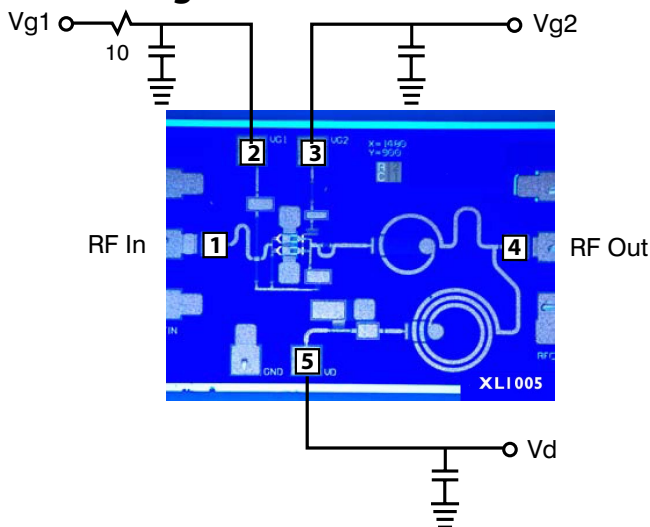

**Bypass Capacitors** - See App Note [2]

# 5.0-20.0 GHz GaAs MMIC Low Noise Amplifier

April 2007 - Rev 19-Apr-07

**App Note [1] Biasing** - As shown in the bonding diagram, this device is operated with a single drain and two gate voltages. Bias is nominally  $V_d=5.0V$ ,  $V_{g1}=-0.3V$ ,  $V_{g2}=1.5V$ , and  $I_d=30mA$ . It is recommended to use active biasing to keep the currents constant as the RF power and temperature vary; this gives the most reproducible results. Depending on the supply voltage available and the power dissipation constraints, the bias circuit may be a single transistor or a low power operational amplifier, with a low value resistor in series with the drain supply used to sense the current. The gate of the pHEMT is controlled to maintain correct drain current and thus drain voltage. The typical gate voltage needed to do this is 0.0V. Typically the gate is protected with Silicon diodes to limit the applied voltage. Also, make sure to sequence the applied voltage to ensure negative gate bias is available before applying the positive drain supply.

**App Note [2] Bias Arrangement** - Each DC pad ( $V_d$  and  $V_{g1,2}$ ) need to have DC bypass capacitance (~100-200 pF) as close to the device as possible. Additional DC bypass capacitance (~0.01 uF) is also recommended.


## MTTF Table (TBD)

These numbers were calculated based on accelerated life test information and thermal model analysis received from the fabricating foundry.

Backplate Temperature	Channel Temperature	Rth	MTTF Hours	FITs
55 deg Celsius	deg Celsius	C/W	E+	E+
75 deg Celsius	deg Celsius	C/W	E+	E+
95 deg Celsius	deg Celsius	C/W	E+	E+

**Bias Conditions:**  $V_d=5.0V$ ,  $I_d=30 mA$

# 5.0-20.0 GHz GaAs MMIC Low Noise Amplifier



April 2007 - Rev 19-Apr-07

## Handling and Assembly Information

**CAUTION!** - Mimix Broadband MMIC Products contain gallium arsenide (GaAs) which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- *Do not ingest.*
- *Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.*
- *Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.*

**Life Support Policy** - Mimix Broadband's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President and General Counsel of Mimix Broadband. As used herein: (1) Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user. (2) A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**ESD** - Gallium Arsenide (GaAs) devices are susceptible to electrostatic and mechanical damage. Die are supplied in antistatic containers, which should be opened in cleanroom conditions at an appropriately grounded anti-static workstation. Devices need careful handling using correctly designed collets, vacuum pickups or, with care, sharp tweezers.

**Die Attachment** - GaAs Products from Mimix Broadband are 0.100 mm (0.004") thick and have vias through to the backside to enable grounding to the circuit. Microstrip substrates should be brought as close to the die as possible. The mounting surface should be clean and flat. If using conductive epoxy, recommended epoxies are Tanaka TS3332LD, Die Mat DM6030HK or DM6030HK-Pt cured in a nitrogen atmosphere per manufacturer's cure schedule. Apply epoxy sparingly to avoid getting any on to the top surface of the die. An epoxy fillet should be visible around the total die periphery. For additional information please see the Mimix "Epoxy Specifications for Bare Die" application note. If eutectic mounting is preferred, then a fluxless gold-tin (AuSn) preform, approximately 0.001<sup>2</sup> thick, placed between the die and the attachment surface should be used. A die bonder that utilizes a heated collet and provides scrubbing action to ensure total wetting to prevent void formation in a nitrogen atmosphere is recommended. The gold-tin eutectic (80% Au 20% Sn) has a melting point of approximately 280 °C (Note: Gold Germanium should be avoided). The work station temperature should be 310 °C +/- 10 °C. Exposure to these extreme temperatures should be kept to minimum. The collet should be heated, and the die pre-heated to avoid excessive thermal shock. Avoidance of air bridges and force impact are critical during placement.

**Wire Bonding** - Windows in the surface passivation above the bond pads are provided to allow wire bonding to the die's gold bond pads. The recommended wire bonding procedure uses 0.076 mm x 0.013 mm (0.003" x 0.0005") 99.99% pure gold ribbon with 0.5-2% elongation to minimize RF port bond inductance. Gold 0.025 mm (0.001") diameter wedge or ball bonds are acceptable for DC Bias connections. Aluminum wire should be avoided. Thermo-compression bonding is recommended though thermosonic bonding may be used providing the ultrasonic content of the bond is minimized. Bond force, time and ultrasonics are all critical parameters. Bonds should be made from the bond pads on the die to the package or substrate. All bonds should be as short as possible.

## Ordering Information

Part Number for Ordering	Description
XL1005-BD-000V	Where "V" is RoHS compliant die packed in vacuum release gel paks
XL1005-BD-000W	Where "W" is RoHS compliant die packed in waffle trays
XL1005-BD-EV1	XL1005 die evaluation module

Mimix Broadband, Inc., 10795 Rockley Rd., Houston, Texas 77099  
Tel: 281.988.4600 Fax: 281.988.4615 mimixbroadband.com

Page 6 of 6

Characteristic Data and Specifications are subject to change without notice. ©2007 Mimix Broadband, Inc.  
Export of this item may require appropriate export licensing from the U.S. Government. In purchasing these parts, U.S. Domestic customers accept their obligation to be compliant with U.S. Export Laws.