

## 1a 10A, 1a1b/2a 8A small polarized power relays

# DK RELAYS



RoHS compliant

### FEATURES

- 1. Compact with high capacity**  
High capacity switching in a small package: 1 Form A, 10 A 250 V AC; 1 Form A 1 Form B and 2 Form A, 8 A 250 V AC.
- 2. High sensitivity: 200 mW nominal operating power**
- 3. High breakdown voltage**  
Independent coil and the contact structure improves breakdown voltage.

| Between contact and coil                                     | Between open contacts                                       |
|--|---|
| 4,000 Vrms for 1 min.<br>10,000 V surge<br>breakdown voltage | 1,000 Vrms for 1 min.<br>1,500 V surge<br>breakdown voltage |

Conforms with FCC Part 68

- 4. Latching types available**
- 5. Sealed construction allows automatic washing.**
- 6. Sockets are available**
- 7. Complies with safety standards**  
Complies with Japan Electrical Appliance and Material Safety Law requirements for operating 200 V power supply circuits, and complies with UL, CSA, and TÜV safety standards.

### TYPICAL APPLICATIONS

- 1. Switching power supply**
- 2. Power switching for various OA equipment**
- 3. Control or driving relays for industrial machines (robotics, numerical control machines, etc.)**
- 4. Output relays for programmable logic controllers, temperature controllers, timers and so on.**
- 5. Home appliances**

## ORDERING INFORMATION

DK  -  -  -

Contact arrangement

1a: 1 Form A

2a: 2 Form A

1a1b: 1 Form A 1 Form B

Operating function

Nil: Single side stable

L2: 2 coil latching

Nominal coil voltage (DC)

3, 5, 6, 9, 12, 24V

Contact material

F: 1 Form A (AgSnO<sub>2</sub> type)

Nil: 2 Form A, 1 Form A 1 Form B (Au-flashed AgNi type)

Notes: 1. Certified by UL, CSA and TÜV

2. VDE approved type is available.

## TYPES

| Contact arrangement  | Nominal coil voltage | Single side stable | 2 coil latching |
|----------------------|----------------------|--------------------|-----------------|
|                      |                      | Part No.           | Part No.        |
| 1 Form A             | 3V DC                | DK1a-3V-F          | DK1a-L2-3V-F    |
|                      | 5V DC                | DK1a-5V-F          | DK1a-L2-5V-F    |
|                      | 6V DC                | DK1a-6V-F          | DK1a-L2-6V-F    |
|                      | 9V DC                | DK1a-9V-F          | DK1a-L2-9V-F    |
|                      | 12V DC               | DK1a-12V-F         | DK1a-L2-12V-F   |
|                      | 24V DC               | DK1a-24V-F         | DK1a-L2-24V-F   |
| 1 Form A<br>1 Form B | 3V DC                | DK1a1b-3V          | DK1a1b-L2-3V    |
|                      | 5V DC                | DK1a1b-5V          | DK1a1b-L2-5V    |
|                      | 6V DC                | DK1a1b-6V          | DK1a1b-L2-6V    |
|                      | 9V DC                | DK1a1b-9V          | DK1a1b-L2-9V    |
|                      | 12V DC               | DK1a1b-12V         | DK1a1b-L2-12V   |
|                      | 24V DC               | DK1a1b-24V         | DK1a1b-L2-24V   |
| 2 Form A             | 3V DC                | DK2a-3V            | DK2a-L2-3V      |
|                      | 5V DC                | DK2a-5V            | DK2a-L2-5V      |
|                      | 6V DC                | DK2a-6V            | DK2a-L2-6V      |
|                      | 9V DC                | DK2a-9V            | DK2a-L2-9V      |
|                      | 12V DC               | DK2a-12V           | DK2a-L2-12V     |
|                      | 24V DC               | DK2a-24V           | DK2a-L2-24V     |

Standard packing: Carton: 50 pcs.; Case: 500 pcs.

\* For sockets, see page 123.

## RATING

### 1. Coil data

#### 1) Single side stable

| Nominal coil voltage | Pick-up voltage (at 20°C 68°F)            | Drop-out voltage (at 20°C 68°F)           | Nominal operating current [±10%] (at 20°C 68°F) | Coil resistance [±10%] (at 20°C 68°F) | Nominal operating power | Max. applied voltage (at 20°C 68°F) |
|----------------------|---|---|---|---------------------------------------|-------------------------|-------------------------------------|
| 3V DC                | 70%V or less of nominal voltage (Initial) | 10%V or more of nominal voltage (Initial) | 66.6mA  | 45Ω                                   | 200mW                   | 130%V of nominal voltage            |
| 5V DC                |   |   | 40mA  | 125Ω                                  |                         |                                     |
| 6V DC                |   |   | 33.3mA  | 180Ω                                  |                         |                                     |
| 9V DC                |   |   | 22.2mA  | 405Ω                                  |                         |                                     |
| 12V DC               |   |   | 16.6mA  | 720Ω                                  |                         |                                     |
| 24V DC               |   |   | 8.3mA   | 2,880Ω                                |                         |                                     |

#### 2) 2 coil latching

| Nominal coil voltage | Set voltage (at 20°C 68°F)                | Reset voltage (at 20°C 68°F)              | Nominal operating current [±10%] (at 20°C 68°F) |            | Coil resistance [±10%] (at 20°C 68°F) |            | Nominal operating power |            | Max. applied voltage (at 20°C 68°F) |
|----------------------|---|---|---|------------|---------------------------------------|------------|-------------------------|------------|-------------------------------------|
|                      |   |   | Set coil  | Reset coil | Set coil                              | Reset coil | Set coil                | Reset coil |                                     |
| 3V DC                | 70%V or less of nominal voltage (Initial) | 70%V or less of nominal voltage (Initial) | 66.6mA  | 66.6mA     | 45Ω                                   | 45Ω        | 200mW                   | 200mW      | 130%V of nominal voltage            |
| 5V DC                |   |   | 40mA  | 40mA       | 125Ω                                  | 125Ω       |                         |            |                                     |
| 6V DC                |   |   | 33.3mA  | 33.3mA     | 180Ω                                  | 180Ω       |                         |            |                                     |
| 9V DC                |   |   | 22.2mA  | 22.2mA     | 405Ω                                  | 405Ω       |                         |            |                                     |
| 12V DC               |   |   | 16.6mA  | 16.6mA     | 720Ω                                  | 720Ω       |                         |            |                                     |
| 24V DC               |   |   | 8.3mA   | 8.3mA      | 2,880Ω                                | 2,880Ω     |                         |            |                                     |

2. Specifications

| Characteristics                        | Item  | Specifications   |   |                           |
|--|---|--|---|---------------------------|
|  |   | 1 Form A   | 1 Form A 1 Form B   | 2 Form A                  |
| Contact                                | Arrangement   |  |   |                           |
|  | Contact resistance (Initial)  | Max. 30 mΩ (By voltage drop 6 V DC 1A)   |   |                           |
| Rating                                 | Contact material  | Au-flashed AgSnO <sub>2</sub> type   |   | Au-flashed AgNi type      |
|  | Nominal switching capacity (resistive load)   | 10 A 250 V AC, 10 A 30 V DC  | 8 A 250 V AC, 8 A 30 V DC   | 8 A 250 V AC, 8 A 30 V DC |
|  | Max. switching power (resistive load)   | 2,500VA, 300 W   | 2,000 VA, 240 W   | 2,000 VA, 240 W           |
|  | Max. switching voltage  | 250 V AC, 125 V DC   | 250 V AC, 125 V DC  | 250 V AC, 125 V DC        |
|  | Max. switching current  | 10 A   | 8 A   | 8 A                       |
|  | Nominal operating power   | 200 mW   |   |                           |
|  | Min. switching capacity (Reference value)*1   | 10m A 5 V DC   |   |                           |
| Electrical characteristics             | Insulation resistance (Initial)   | Min. 1,000MΩ (at 500V DC) Measurement at same location as "Breakdown voltage" section.   |   |                           |
|  | Breakdown voltage (Initial)   | Between open contacts  | 1,000 Vrms for 1min. (Detection current: 10mA.)                                       |                           |
|  |   | Between contact and coil   | 4,000 Vrms for 1min. (Detection current: 10mA.)                                       |                           |
|  | Surge breakdown voltage*2 (Initial)   | between contacts and coil  | 10,000 V  |                           |
|  | Temperature rise (coil) (at 65°C 149°F)   | Max. 40°C (By resistive method, nominal voltage applied to the coil; max. switching current)                                     |   |                           |
| Operate time [Set time] (at 20°C 68°F) | Max. 10 ms (Approx. 5 ms) [10 ms (Approx. 5 ms)]<br>(Nominal coil voltage applied to the coil, excluding contact bounce time.)                |  |   |                           |
|  | Max. 8 ms (Approx. 3 ms) [10 ms (Approx. 3 ms)]<br>(Nominal coil voltage applied to the coil, excluding contact bounce time.) (without diode) |  |   |                           |
| Mechanical characteristics             | Shock resistance  | Functional   | Min. 98 m/s <sup>2</sup> (Half-wave pulse of sine wave: 11 ms; detection time: 10μs.) |                           |
|  |   | Destructive  | Min. 980 m/s <sup>2</sup> (Half-wave pulse of sine wave: 6 ms.)                       |                           |
|  | Vibration resistance  | Functional   | 10 to 55 Hz at double amplitude of 1.5 mm (Detection time: 10μs.)                     |                           |
|  |   | Destructive  | 10 to 55 Hz at double amplitude of 3 mm   |                           |
| Expected life                          | Mechanical  | Min. 5×10 <sup>7</sup> (at 300 times/min.)   |   |                           |
|  | Electrical  | Min. 10 <sup>6</sup> (resistive load, at 20 times/min., at rated capacity)   |   |                           |
| Conditions                             | Conditions for operation, transport and storage*3   | Ambient temperature: -40°C to +65°C -40°F to +149°F,<br>Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature) |   |                           |
|  | Max. operating speed (at rated load)  | 20 times/min.  |   |                           |
| Unit weight                            |   | Approx. 5 g .18 oz   | Approx. 6 g .21 oz  | Approx. 6 g .21 oz        |


Notes: \*1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

\*2. Wave is standard shock voltage of ±1.2×50μs according to JEC-212-1981


\*3. The upper limit of the ambient temperature is the maximum temperature that can satisfy the coil temperature rise value. Refer to Usage, transport and storage conditions in NOTES.

REFERENCE DATA


1-(1). Maximum operating power (1 Form A)

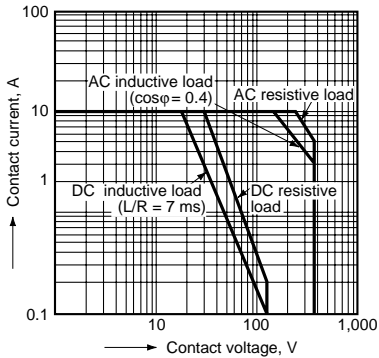


1-(2). Maximum operating power (1 Form A 1 Form B, 2 Form A)

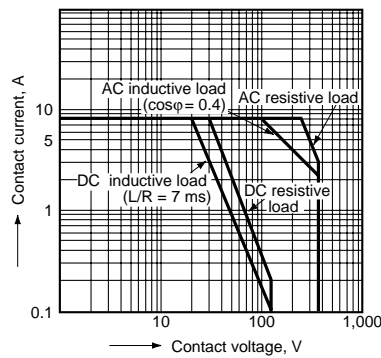


2-(1). Life curve (1 Form A)

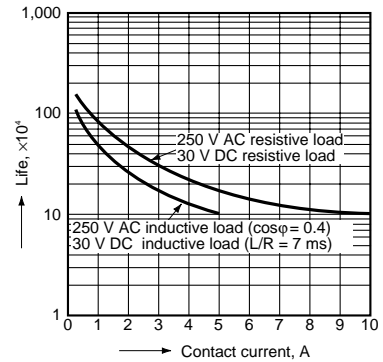


2-(2). Life curve (1 Form A 1 Form B, 2 Form A)

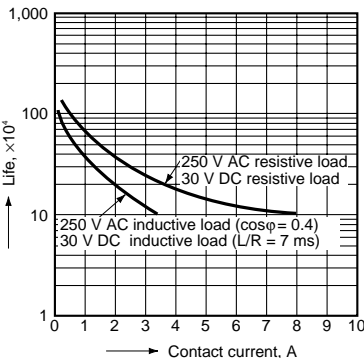

3-(1). Operate/Release time (1 Form A)  
Tested sample: DK1a-24V, 5 pcs.

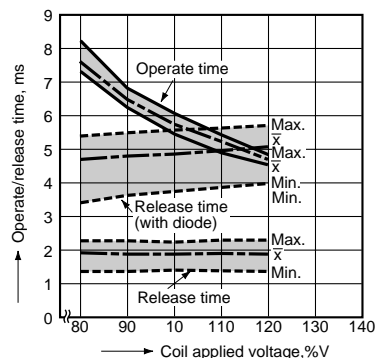


3-(2). Operate/Release time (1 Form A 1 Form B, 2 Form A)  
Tested sample: DK1a1b-12V, 5 pcs.

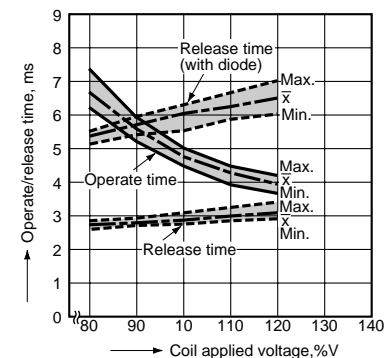


4-(1). Coil temperature rise (1 Form A)

Tested sample: DK1a-12V, 5 pcs.  
Ambient temperature: 30°C 86°F

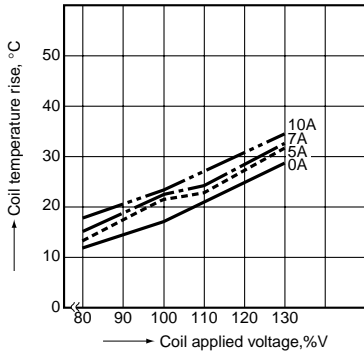


4-(2). Coil temperature rise (1 Form A 1 Form B, 2 Form A)

Tested sample: DK1a1b-12V, 5 pcs.  
Ambient temperature: 20°C 68°F

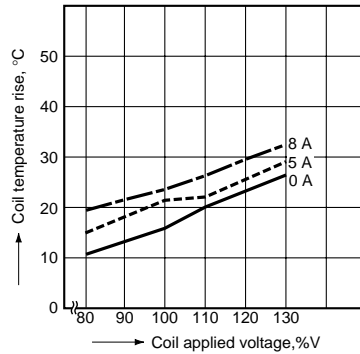


5-(1). Ambient temperature characteristics (1 Form A)

Tested sample: DK1a-24V, 6 pcs  
Ambient temperature: -40°C to +80°C  
-40°F to +176°F

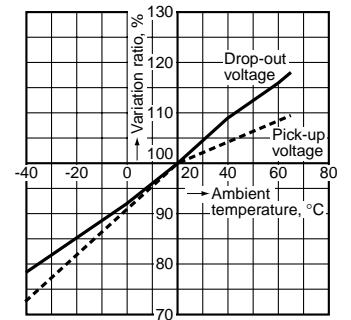

5-(2). Ambient temperature characteristics (1 Form A 1 Form B, 2 Form A)

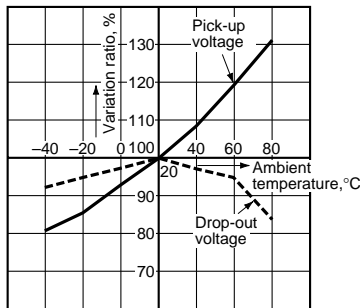

**DIMENSIONS** (mm inch)


The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://industrial.panasonic.com/ac/e/>

1. 1 Form A type


**CAD Data**




External dimensions  
Single side stable type

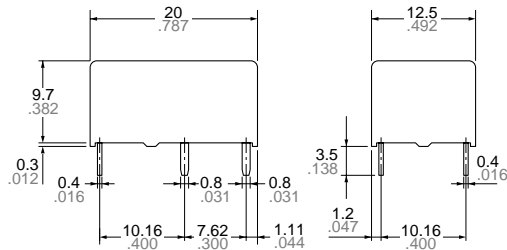

PC board pattern (Bottom view)





Schematic (Bottom view)  
Single side stable




(Deenergized condition)

2 coil latching type

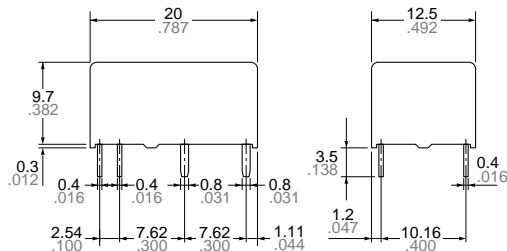

2 coil latching



(Reset condition)


General tolerance:  $\pm 0.3 \pm 0.012$

Tolerance:  $\pm 0.1 \pm 0.004$


Since this is a polarized relay, the connection to the coil should be done according to the above schematic.

2. 1 Form A 1 Form B type, 2 Form A type


CAD Data

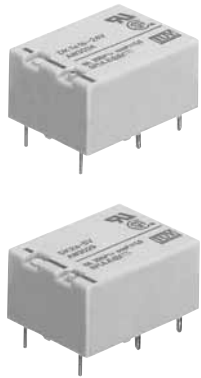

External dimensions  
Single side stable type


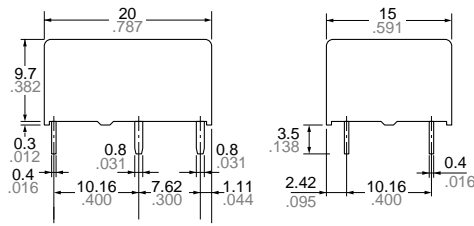


2 coil latching type

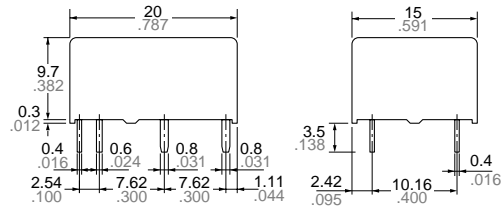

General tolerance:  $\pm 0.3 \pm .012$


PC board pattern (Bottom view)



Tolerance:  $\pm 0.1 \pm .004$


Schematic  
(Bottom view)

<1 Form A 1 Form B type>  
Single side stable




(Deenergized condition)

2 coil latching




(Reset condition)

<2 Form A>  
Single side stable



(Deenergized condition)

2 coil latching



(Reset condition)

Since this is a polarized relay, the connection to the coil should be done according to the above schematic.

SAFETY STANDARDS

| Item                              | UL/C-UL (Recognized) |   | CSA (Certified) |   | VDE (Certified) |  | TÜV (Certified)   |   |
|-----------------------------------|----------------------|---|-----------------|---|-----------------|--|---|---|
|                                   | File No.             | Contact rating                                  | File No.        | Contact rating                                  | File No.        | Contact rating   | File No.  | Rating  |
| 1 Form A                          | E43028               | 10A 250V AC<br>1/3HP 125, 250V AC<br>10A 30V DC | LR26550<br>etc. | 10A 250V AC<br>1/3HP 125, 250V AC<br>10A 30V DC | 006099UG        | AC 250V 10A (cosφ=1.0)<br>AC 250V 5A (cosφ=0.4)<br>DC 30V 10A (0ms)  | 8705<br>1645 520  | 10A 250V AC (cosφ=1.0)<br>5A 250V AC (cosφ=0.4)<br>10A 30V DC |
| 1 Form A<br>1 Form B,<br>2 Form A | E43028               | 8A 250V AC<br>1/4HP 125, 250V AC<br>8A 30V DC   | LR26550<br>etc. | 8A 250V AC<br>1/4HP 125, 250V AC<br>8A 30V DC   | 006099UG        | 1 Form A 1 Form B:<br>AC 250V 8A (cosφ=1.0)<br>2 Form A:<br>AC 250V 8A (cosφ=1.0)<br>AC 250V 4A (cosφ=0.4) | 8705 1645<br>520 (1 Form A<br>1 Form B)<br>9407 13461<br>097 (2 Form A) | 8A 250V AC (cosφ=1.0)<br>4A 250V AC (cosφ=0.4)<br>8A 30V DC   |

NOTES

1. Soldering should be done under the following conditions:

250°C 482°F within 10s

300°C 572°F within 5s

350°C 662°F within 3s

Soldering depth: 2/3 terminal pitch

2. External magnetic field

Since DK relays are highly sensitive polarized relays, their characteristics will be affected by a strong external magnetic field. Avoid using the relay under that condition.

3. When using, please be aware that the a contact and b contact sides of 1 Form A and 1 Form B types may go on simultaneously at operate time and release time.

For Cautions for Use.