


## ISOLATED DC/DC CONVERTERS

48V Input 8V/15A Output, 1/8 Brick

**bel**  
POWER PRODUCTS

### 07CR-15T Series PRELIMINARY

- Isolated
- High Efficiency
- High Power Density
- Fixed Frequency
- Remote On/Off
- Input Under Voltage Lockout
- Output Overvoltage Shutdown
- OCP/SCP
- Low Cost
- Thermal Shutdown

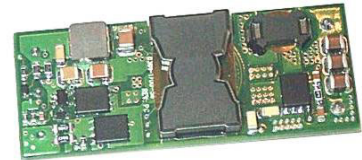

### Description

The 07CR-15T Series are isolated DC/DC converters that operate from a nominal 48V source. These converters are intended to provide isolation and step down to generate an intermediate bus for the purpose of powering non-isolated Point-of-Load (POL) converters. These units will provide up to 130W of output power from a nominal 48V input. These units are designed to be highly efficient and very low cost and are thus unregulated. The downstream POL converters will provide the precise regulation required by the load. Features include remote on/off, over current protection and undervoltage lockout. These converters are provided in an industry standard eighth-brick package.

### Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active High	Model Number Active Low
8V	36V-75V	15A	130W	95%	07CR-15T08H	07CR-15T08L

**Note:** Add "G" suffix at the end of the model number to indicate Tray Packaging.

### Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3V	-	100V	
Remote On/Off	-0.3V	-	100V	
Ambient Temperature	-40°C	-	85°C	
Storage Temperature	-40°C	-	125°C	

### Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	36V	-	75V	
Input Current (full load)	-	-	3A	
Input Current (no load)	-	-	45mA	
Remote Off Input Current	-	2mA	3mA	
Input Reflected Ripple Current (pk-pk)	-	-	N/A	Tested with simulated source impedance of 10uH, 5Hz to 20MHz; use a 47uF/100V electrolytic capacitor with ESR = 1 ohm max. at 200KHz at 25°C.
Input Reflected Ripple Current (RMS)	-	-	N/A	
I <sup>2</sup> t Inrush Current Transient	-	0.039A <sup>2</sup> s	0.062A <sup>2</sup> s	
Turn On Voltage Threshold	-	34.5V	-	
Turn Off Voltage Threshold	-	32.5V	-	

**Note:** All specifications are typical at 25°C unless otherwise stated.

# ISOLATED DC/DC CONVERTERS

48V Input 8V/15A Output, 1/8 Brick



## Output Specifications

Parameter		Min	Typ	Max	Notes	
Output Voltage Set Point	Vin=36V	-	6V	-		
	Vin=48V	-	8V	-		
	Vin=75V	-	12.5V	-		
Line Regulation		-	6.5V	-		
Load Regulation	Vin=36V	-	0.5V	-		
	Vin=48V	-	0.5V	-		
	Vin=75V	-	0.5V	-		
Regulation Over Temperature (-40°C to +85°C)		-	30mV	-		
Output Current		0A	-	15A		
Current Limit Threshold		-	20A	-		
Short Circuit Surge Transient		-	1.3A <sup>2</sup> s	2.1A <sup>2</sup> s		
Ripple and Noise (RMS)		-	15mV	20mV	Test conditions: 0-20MHz BW, with a 1uF ceramic capacitor and a 15uF Tantalum capacitor at the output; Vin=48V.	
Ripple and Noise (pk-pk)		-	90mV	100mV		
Turn on Time		-	10mS	-		
Overshoot at Turn on		-	0%	3%		
Output Capacitance		0uF	-	3000uF		
<b>Transient Response</b>						
25% ~ 50% Max Load	Overshoot	Vin=48V	-	100mV	-	Test conditions: di/dt = 0.1A/uS, Vin=48V, with a 15uF tantalum capacitor at the output.
	Settling Time		-	120uS	150uS	
50% ~ 25% Max Load	Overshoot		-	100mV	-	
	Settling Time		-	120uS	150uS	

**Note:** All specifications are typical at 25°C unless otherwise stated.

## General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency	93%	95%	-	Vin=48V, Io=Io,max
Switching Frequency	180KHz	200KHz	220KHz	
Over Temperature Protection	-	115°C	-	Average PCB temperature will not exceed 115°C.
MTBF	2,569,594 hours			Calculated Per Bell Core TR-332 (Io = Nominal; Ta = 25°C)
Dimensions	Inches (L x W x H) Millimeters (L x W x H)			2.30 x 0.9 x 0.41 58.4 x 22.8 x 10.41
Weight	-	23g	-	

**Note:** All specifications are typical at 25°C unless otherwise stated.

# ISOLATED DC/DC CONVERTERS


48V Input 8V/15A Output, 1/8 Brick




## Control Specifications

Parameter		Min	Typ	Max	Notes
<b>Remote On/Off</b>					
Signal Low (Unit On)	Active Low	-0.3V	-	0.8V	07CR-15T08L. The remote on/off pin open, Unit on.
Signal High (Unit Off)		2.5V	-	100V	
Signal Low (Unit Off)	Optional Active High	-0.3V	-	0.8V	07CR-15T08H. The remote on/off pin open, Unit on.
Signal High (Unit On)		2.5V	-	100V	

## Efficiency Data

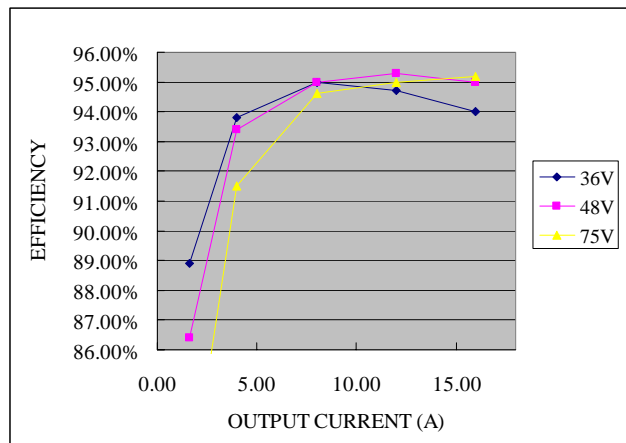

## Thermal Derating Curve

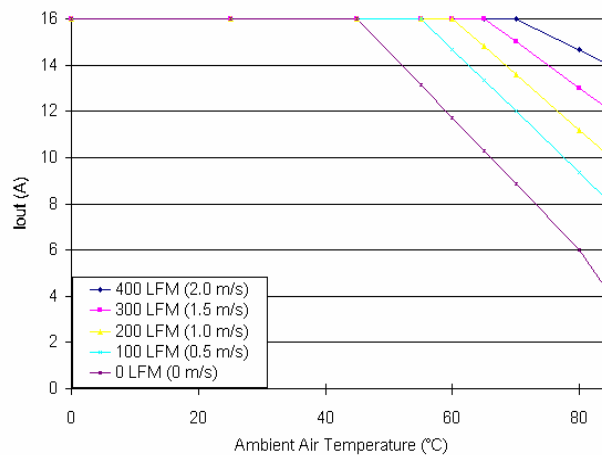

Maximum output power derating curves vs. ambient air temperature for airflow rates of 0 LFM through 400 LFM with air flowing from input to output (nominal input voltage).


## ISOLATED DC/DC CONVERTERS

48V Input 8V/15A Output, 1/8 Brick

**bel**  
POWER PRODUCTS

### Turn-On (Enable)

Transient Response:  $di/dt=0.1A/\mu s$ , External Load Capacitance  $C_o=15\mu F$  (tantalum capacitor)

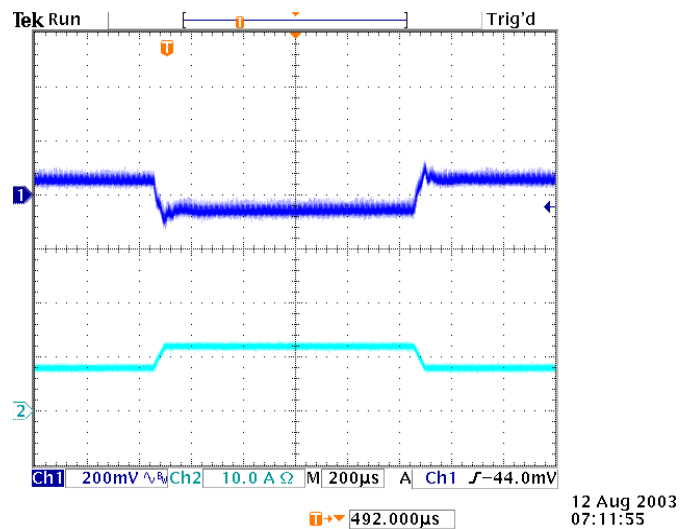



50% to 75% and 75% to 50% load Transient at 48Vdc input and  $T_a=25$  deg C  
External Load Capacitance:  $15\mu F$  tantalum capacitor

# ISOLATED DC/DC CONVERTERS

48V Input 8V/15A Output, 1/8 Brick



## Mechanical Drawing

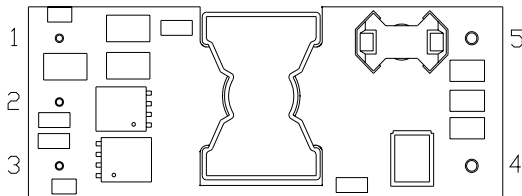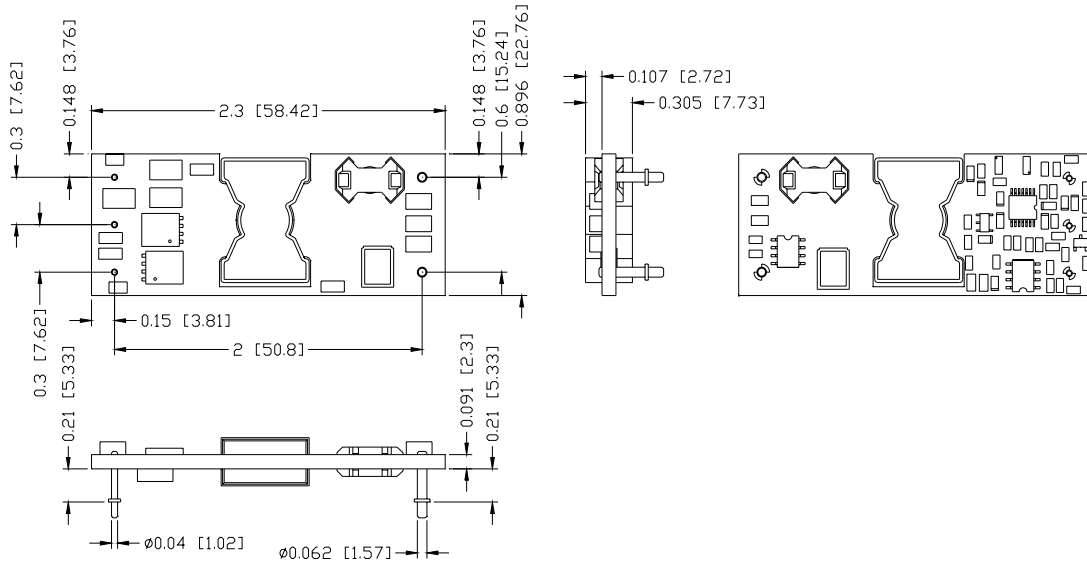

## Pin Connections

Pin	Function
1	Vin+
2	Remote On/Off
3	Vin-
4	Vout-
5	Vout+

©2005 Bel Fuse Inc. Specifications subject to change without notice. 010505

### CORPORATE

**Bel Fuse Inc.**  
 206 Van Vorst Street  
 Jersey City, NJ 07302  
 Tel 201-432-0463  
 Fax 201-432-9542  
[www.belfuse.com](http://www.belfuse.com)

### FAR EAST

**Bel Fuse Ltd.**  
 8F/ 8 Luk Hop Street  
 San Po Kong  
 Kowloon, Hong Kong  
 Tel 852-2328-5515  
 Fax 852-2352-3706  
[www.belfuse.com](http://www.belfuse.com)

### EUROPE

**Bel Fuse Europe Ltd.**  
 Preston Technology Management Centre  
 Marsh Lane, Suite G7, Preston  
 Lancashire, PR1 8UD, U.K.  
 Tel 44-1772-556601  
 Fax 44-1772-888366  
[www.belfuse.com](http://www.belfuse.com)