

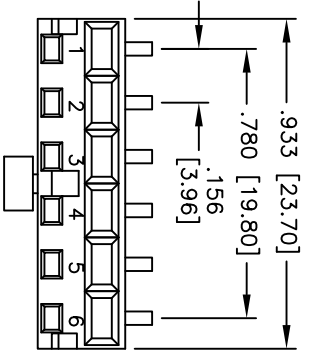


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/03/10	

APPROVED: _____
 DATE: _____ TITLE: _____

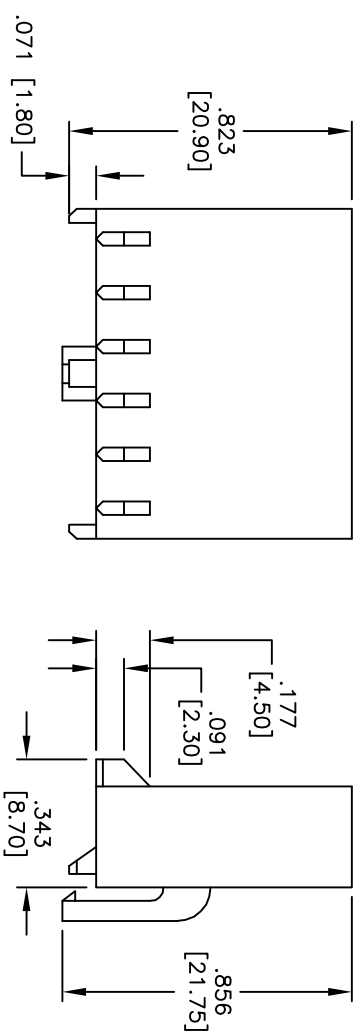

WITH KEYING WITHOUT KEYING
 (FOR OTHER P/N)

ADAM PART NO.	KEYING REQD. AT CIRCUIT POSITIONS					
	1	2	3	4	5	6
MTG-06-02-V0	YES	NO	NO	NO	NO	NO
MTG-06-03-V0	NO	NO	NO	YES	NO	NO
MTG-06-07-V0	NO	NO	NO	NO	NO	NO
MTG-06-08-V0	NO	YES	NO	NO	NO	NO
MTG-06-09-V0	NO	NO	YES	NO	NO	NO
MTG-06-10-V0	NO	NO	NO	NO	YES	NO

SPECIFICATIONS:

Material: Nylon 66, rated UL 94V-0
 Insulator color: Natural
 Electrical:
 Operating voltage: 250 VAC max.
 Current rating: 5 Amps max.
 Contact resistance: 20 mohms max.
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding voltage: 1,500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

POWER LATCH CRIMP HOUSING
 .156 [3.96] PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES Holes ±.10 ØXX ±.015 .XX ±.020 .XXX ±.015 APPROVALS DATE		TITLE POWER LATCH CRIMP HOUSING .156 [3.96] PITCH	
DRAWN DY	5/03/10	SIZE X	PART NO. MTG-06-XX-V0
CHECKED		REF: S0076T	SCALE: NTS
APPROVED			SHEET 1 OF 1