
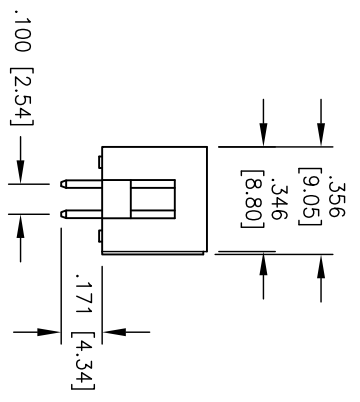
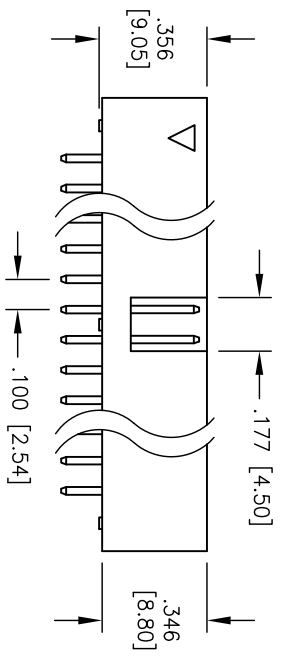
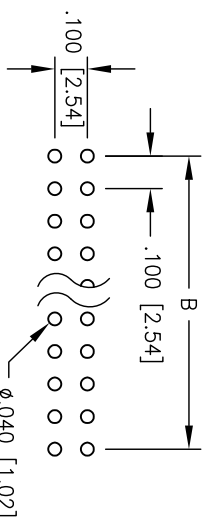


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/1/11	

APPROVED: _____
 DATE: _____ TITLE: _____

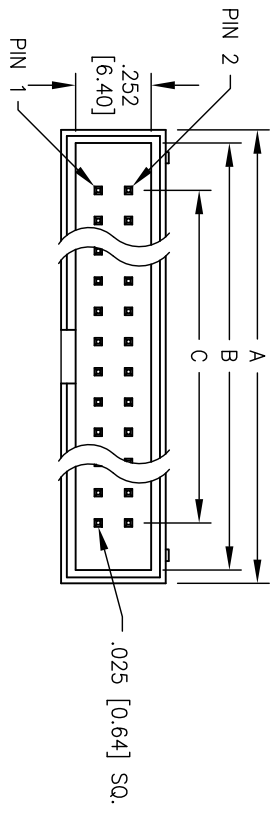

Positions: 6, 8, 10, 12, 14, 16, 20, 24, 26, 30, 34, 40
 44, 50, 56, 60, 64

A = .100 [2.54] X No. of Positions / 2 + .300 [7.62]
 B = .100 [2.54] X No. of Positions / 2 + .212 [5.40]
 C = .100 [2.54] X No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: BOX HEADER, VERTICAL PCB MOUNT,
 2 ROW .100 PITCH, GOLD FLASH

APPROVALS	DATE
DRAWN AY	2/11/11
CHECKED AH	2/11/11
APPROVED	

SIZE	PART NO.	REV.
X	BHR-XX-VU-.171	-

REF: S00059T SCALE: NTS SHEET 1 OF 1



SPECIFICATION:
Material:
 Insulator: PBT, rated UL-94V-0
 Insulator color: Black
 Contacts: Brass
Contact Plating:
 Gold Flash over Nickel underplate overall
Electrical:
 Current rating: 3 Amps max.
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500VDC
 Dielectric withstanding voltage: 500 VAC / minute
Temperature Rating:
 Operating temperature: -40° TO +105°
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.