



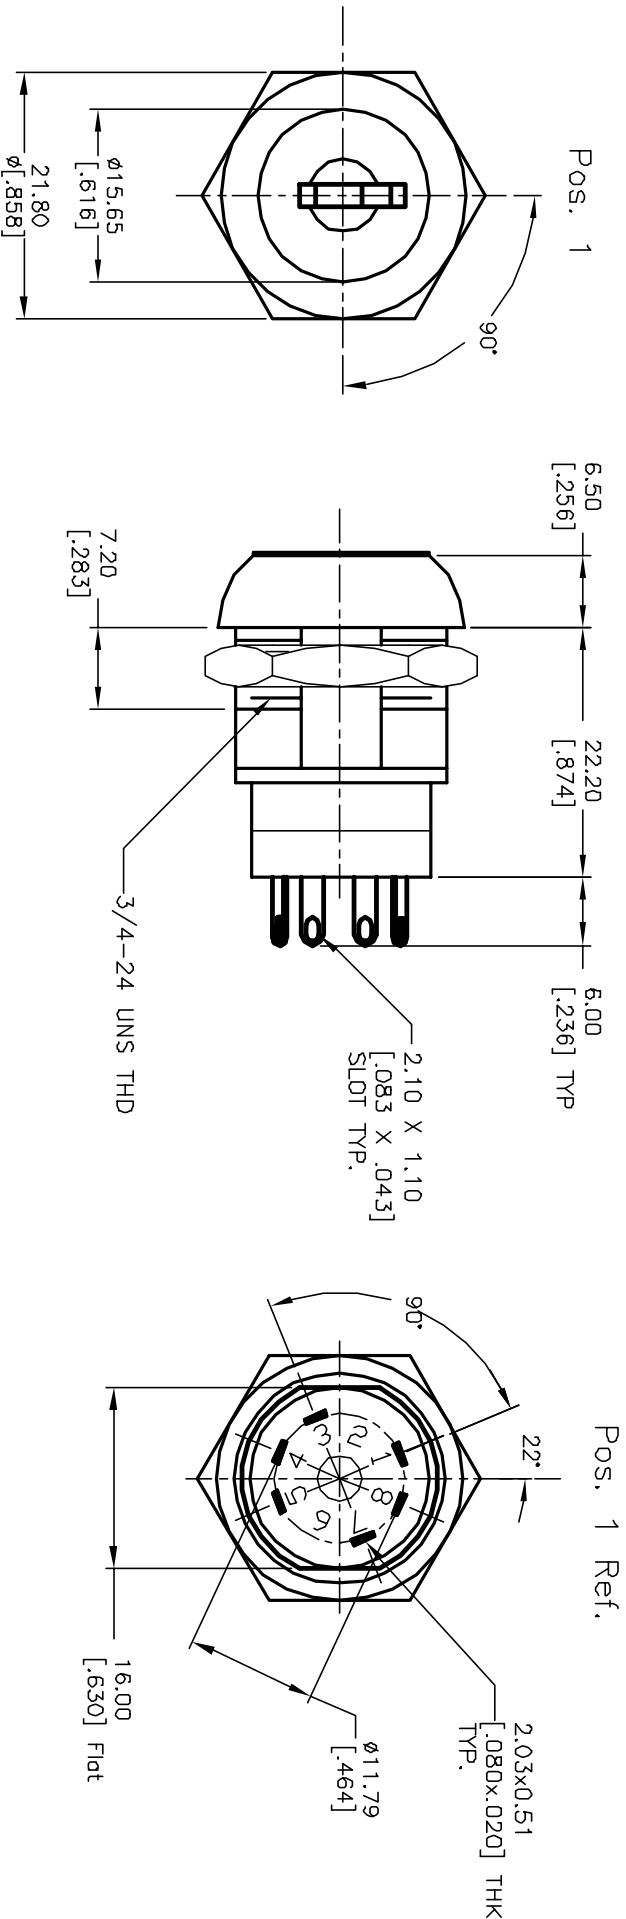

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 4A @125VAC/28VDC, 2A @250VAC
5. DIELECTRIC STRENGTH: 1kV RMS min. at sea level
6. ELECTRICAL LIFE: 10,000 make-and-break cycles
at full load.
7. MATERIALS:

CONTACTS: Silver Plated Cu (Q Contact material)
TERMINALS: GOLD Plated Cu (Q Contact material)
MOUNTING NUT: Nickel Plated zinc alloy
CONTACT SPRING: Piano Wire
KEYS (2): Brass with code no. 604
LOCK: Bright Ni plated zinc alloy with Ni facing
TUMBLER Mechanism: 4-disc tumbler cylinder.

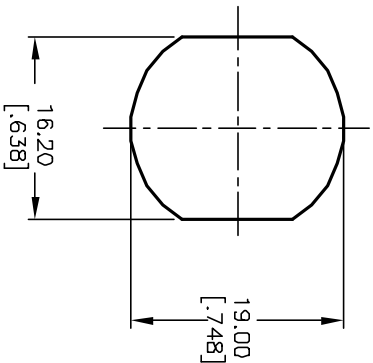


RECOMMENDED PANEL LAYOUT

LEGEND

- =Detent Positions (45° or 90°)
- ⊙ =Key pull possible in these positions

CIRCUIT: DP (90° INDEXING) CONTACT CONFIGURATION	
SWITCH FUNCTION	
CONNECTED TERMINAL #	
POS. 1	POS. 2
8-1, 4-5	1-3, 5-7

CIRCUIT: DP (90° INDEXING)
CONTACT CONFIGURATION



TITLE		K0130Q-604		E-SWITCH®	
A	11714	RELEASED FOR PRODUCTION	10/5/01	CJB	
REV.	ECN NO.	DESCRIPTION	DATE	CHKD	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					
SCALE		1.5:1	DATE	10/5/01	DR
				CJB	DWG
					K200267
					REV
					A