

SHEET 1 OF 1




PANEL CUTOUT
MAX. PANEL THICKNESS
14.0mm [.55]

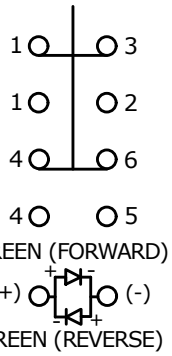



▲ DPDT ON-(ON)
CONTACT CONFIGURATION


▲ SWITCH FUNCTION	
POS. 1	POS. 2
	
ON	(ON)
1-3, 4-6	1-2, 4-5

(ON) = MOMENTARY

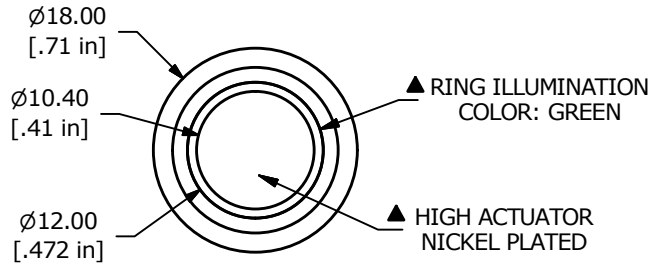

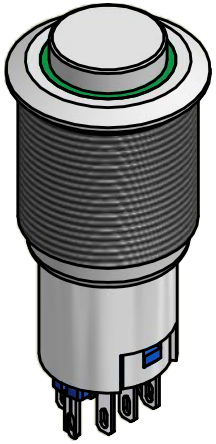

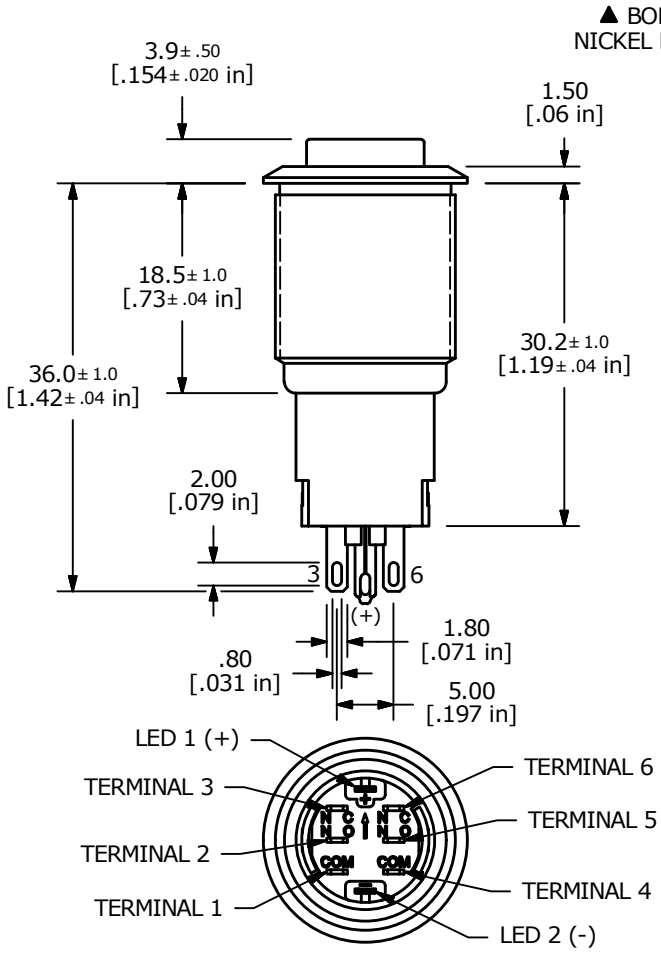

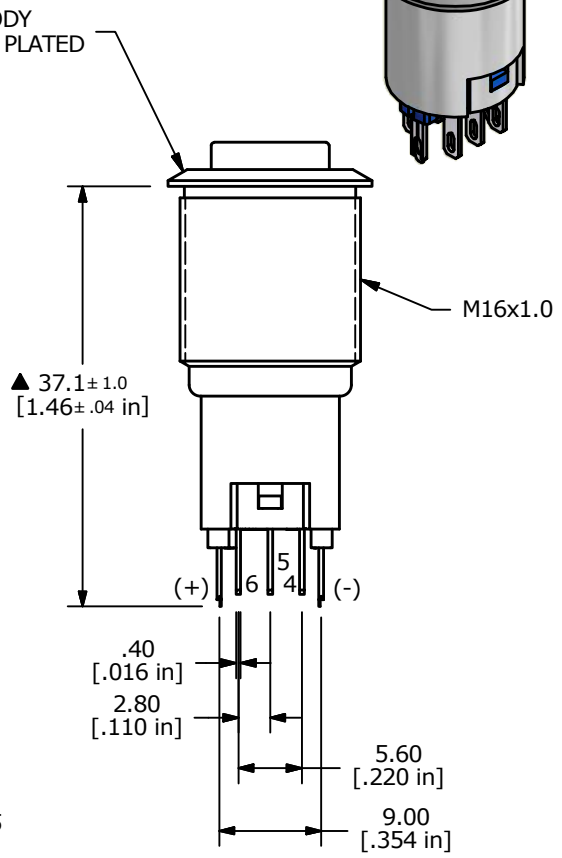

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 2A 48VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
10. OPERATING TEMP.: -20°C to 55°C
11. ▲ DENOTES CRITICAL PARAMETER.
▲ 12. HARDWARE SUPPLIED: O-RING AND HEXNUT
13. INGRESS RATING: IP40
14. 2002/95/EC (ROHS) COMPLIANT
▲ 15. LAMP VOLTAGE: 12V

REV	PCR NO	DESCRIPTION	DATE	BY
D	22108	UPDATE TO NEW TERMINAL HOUSING	12/28/15	MW
C	20446	CORRECT CONTACT CONFIG./ADD TOL.	02/01/12	BMA
B	20441	UPDATE AND CONVERT	01/30/12	BMA

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE PV3H2H0NN-334

SCALE	DATE	DR	DWG	REV
3:2	1/30/2012	BMA	52-PV3H2H0NN334	D